


TECHNICAL DATASHEET


Printed: 29/09/2011
Product Management


Transportation Europe

 Central Article Code:
 D03075G05-A
 Created:
 05/09/2005

 ETN Code or Other:
 ES1300
 Modified:
 26/05/2011





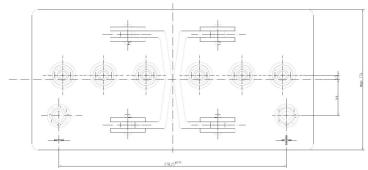

Final Outlook D0305-A Approval date 01/11/2010

PERFORMANCES			
Voltage (V):	12 V		
C20 (Ah):	120.0	20 h	
Rc (min):	0		
Cranking (A):	750	EN	
Vibration:	V3 (35Hz/6g/20h)		
Endurance:	250 cycles@100%		
Charge:	CHARGED		
Technology:	GEL		
Grid:	Ca/Ca		

CONTAINER				
Туре:	D03	GREY MEDIUM		
Hold Down:	В0			

Hold Down: B0
H. D. Adapter: No

WEIGHT AND STD. DIMENSIONS

Lead Weight (kg):	25.83	
Battery Weight (kg):	38.70	
Volume acid (I):	0.00	
Length (mm):	349	
Width (mm):	175	
Height (mm):	290	

Type: Flat/Press GREY MEDIUM

COVER

Polarity: ETN 0

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

PLUGS

 Type:
 6 x M18 Valve
 GREY MEDIUM

 HANDLES

 Type:
 2 x Rigid
 BLACK

OTHERS

Degassing Tube: No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations