

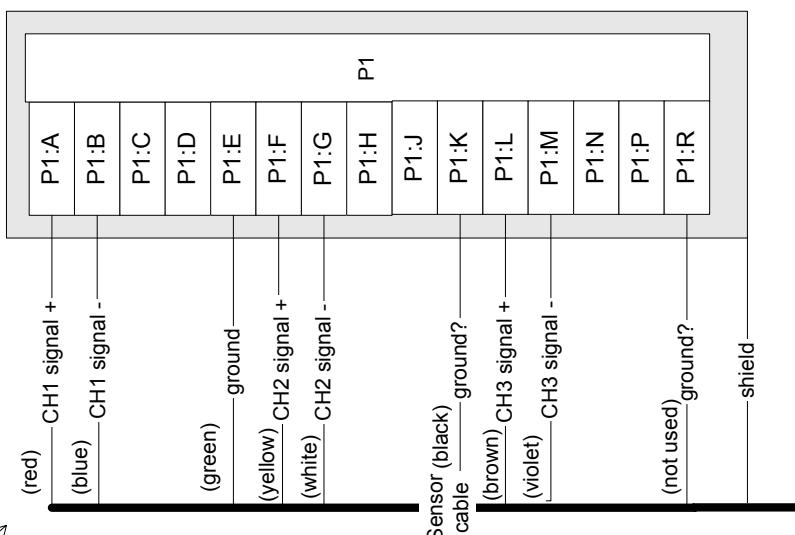


Suggested color code for 8  
leader cable. Shield  
connected to connector  
house.

Souriau 851-06EC14-18P50 (free)  
18p male  
or  
Souriau 851-01EC14-18S50 (free)  
18p female

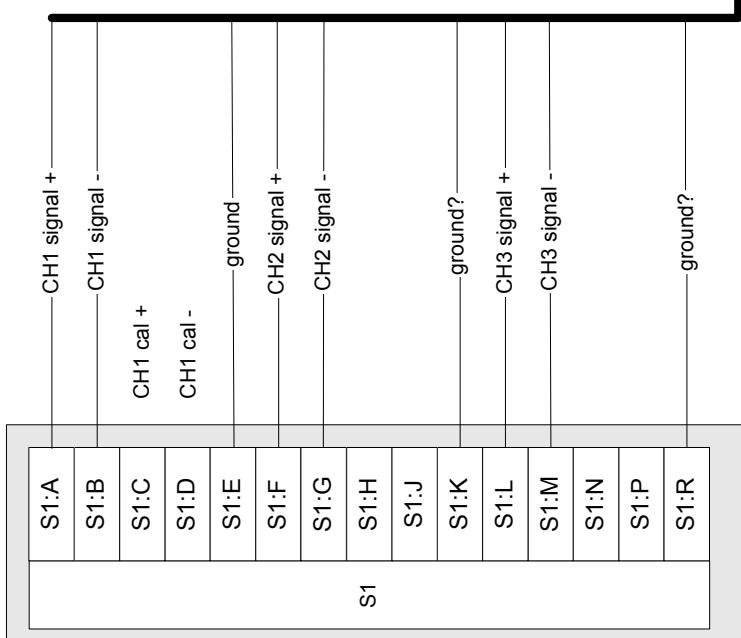

Ground? Means not  
always used. Depending  
on sensor cable / digitizer.  
Ground on E always used.

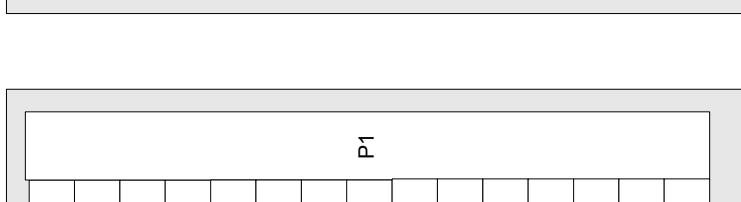

Our standard connectors for sensor-digitizer are called MIL-C-26482.  
They are produced by FCI (Souriau), AMP, CANNON....  
Souriau calls them serie 851. ([www.souriau.com](http://www.souriau.com)).  
Distributor in Norway is Arrows Hatteland.  
IP67 when using sealing ring and grommet (for free plug).

| University of Bergen        |           | NNSN reference station setup |                          |
|-----------------------------|-----------|------------------------------|--------------------------|
| Digitizer connection        |           |                              |                          |
| Department of Earth Science | SIZE A4   | FSCM NO                      | DWG NO NNSNDigitizer.vsd |
| joseo, 21 Oct, 2003         | SCALE 1:1 |                              | SHEET 1 OF 1             |