


# RTQUAKE

## A Real-Time Earthquake Detection System Integrated with SEISAN

Version 2.2

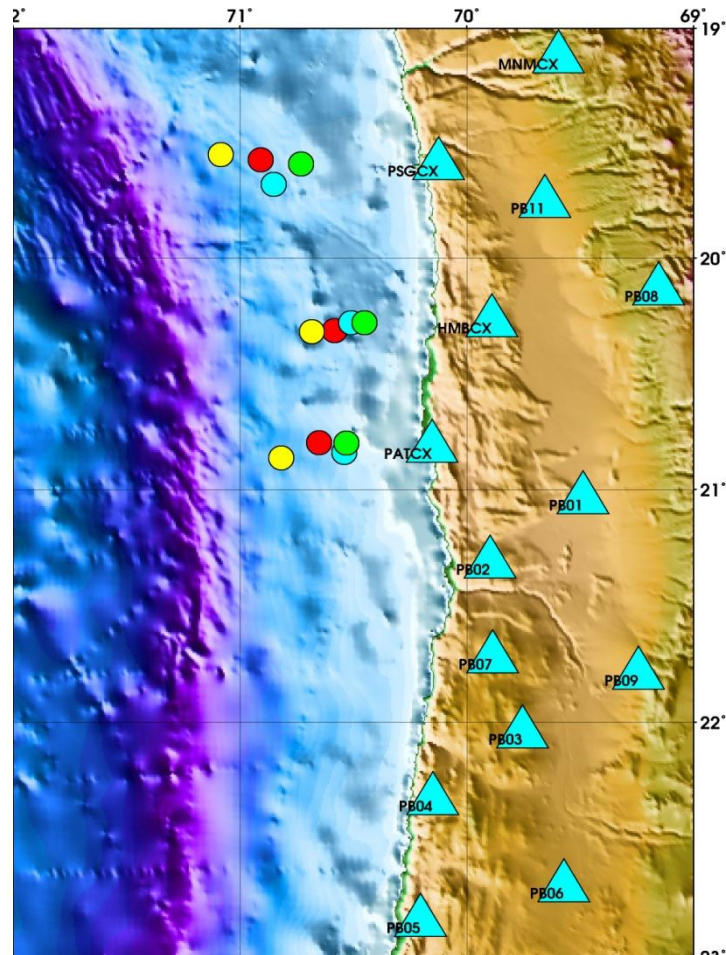

Terje Utheim and Jens Havskov

Department of Earth Science  
University of Bergen  
Allegaten 41, 5007 Bergen  
Norway

Ph. +47 55583408  
Email : [terje.utheim@uib.no](mailto:terje.utheim@uib.no) , [terjeu@hotmail.com](mailto:terjeu@hotmail.com)

May 2017

**Cover**

The map shows 3 events recorded by the example configuration described in this manual. The yellow marker is the automatic location done by RTQUAKE. The red, green and cyan markers are locations done by other institutions.

The events are:

2014/04/01 23:46 M 8.2

2014/04/03 01:58 M 6.3

2014/04/03 05:26 M 6.3

<b>1</b>	<b>INTRODUCTION .....</b>	<b>7</b>
<b>2</b>	<b>UPDATES VERSION 2.2 .....</b>	<b>11</b>
<b>3</b>	<b>INSTALLATION .....</b>	<b>12</b>
3.1	SeedLink .....	12
3.2	Graphics libraries .....	12
3.3	SEISAN .....	12
3.4	STEP-BY-STEP installation of RTQUAKE .....	13
3.5	Additional setup for cron-jobs, helicorder plots etc.....	15
<b>4</b>	<b>TEST RUN INCLUDING MONITORING.....</b>	<b>16</b>
4.1	Aliases, scripts and parameter files to start the test run .....	16
4.2	Update the STATION0.HYP file .....	16
4.3	Start and Stop test run .....	16
4.4	Optional web pages and graphics .....	18
4.5	Reverse Geocoding.....	18
4.6	Examples of optional graphics .....	18
<b>5</b>	<b>PARAMETER FILES, SCRIPTS AND ALIASES .....</b>	<b>25</b>
5.1	Overview of configuration and parameter files, scripts and aliases .....	25
5.2	RTQUAKE system parameters: rtquake.par .....	26
5.3	RTQUAKE Station and Network configuration: rt_config .....	30
5.4	Extracting data from SeedLink servers .....	35
5.5	Configuration files for continuous plot .....	35
5.6	Configuration file for continuous plot from multiple SeedLink servers .....	37
5.7	Configuration files for helicorder plots.....	37
5.8	Parameterfile web-pages .....	38
5.9	Aliases and Scripts .....	39
<b>6</b>	<b>START SCRIPT TEST RUN.....</b>	<b>41</b>

<b>7</b>	<b>CONFIGURATION OF A NEW NETWORK .....</b>	<b>42</b>
<b>8</b>	<b>DIRECTORY STRUCTURE.....</b>	<b>44</b>
<b>9</b>	<b>GENERAL DESCRIPTION AND MODULE OVERVIEW .....</b>	<b>45</b>
<b>10</b>	<b>DETECTION AND RECORDING OF EVENTS.....</b>	<b>46</b>
<b>11</b>	<b>AUTOMATIC LOCATION .....</b>	<b>47</b>
11.1	Automatic location on complete recorded events. ....	47
11.2	Automatic location in "close-to-real-time". ....	50
<b>12</b>	<b>PROCESSING DETECTIONS WITH SEISAN.....</b>	<b>52</b>
<b>13</b>	<b>MAIL .....</b>	<b>54</b>
13.1	Optional : Mail .....	54
<b>14</b>	<b>AUTOPHASE.....</b>	<b>59</b>
<b>15</b>	<b>RTSNR.....</b>	<b>62</b>
<b>16</b>	<b>RTDLY .....</b>	<b>63</b>
<b>17</b>	<b>RTNET .....</b>	<b>65</b>
<b>18</b>	<b>RTSLPL .....</b>	<b>73</b>
<b>19</b>	<b>RTCHK.....</b>	<b>75</b>
<b>20</b>	<b>RTTIME.....</b>	<b>78</b>
<b>21</b>	<b>RTGMT .....</b>	<b>80</b>
<b>22</b>	<b>HELICORDER PLOTS.....</b>	<b>87</b>
<b>23</b>	<b>SHOW NEW LOCATIONS DYNAMICALLY IN GOOGLE EARTH ....</b>	<b>91</b>
<b>24</b>	<b>TYPICAL SEQUENCE DURING AN EVENT DETECTION .....</b>	<b>93</b>
<b>25</b>	<b>DIRECTORY OVERVIEW AFTER INSTALLATION.....</b>	<b>116</b>
<b>26</b>	<b>REFERENCES.....</b>	<b>119</b>

**Copyright:**

The RTQUAKE executables and all RTQUAKE source files are copyrighted to Department of Earth Science (DES), University of Bergen. However, DES grants permissions to use and modify the RTQUAKE source files for non-commercial purposes. DES shall not be held responsible for any loss or damage caused by the use of this software, financially or otherwise. Commercial use of this software requires a written agreement with DES. Use of the software implies agreement with the terms above.

**Questions and suggestions**

Any questions or suggestions concerning the software can be sent to the email addresses on the front page.

# 1 INTRODUCTION

RTQUAKE is a system for monitoring, triggering and recording of data coming from one or several SeedLink servers or digitizing units providing data according to the SeedLink protocol. The system is intended for routine operation of local and regional networks. RTQUAKE is written in C and uses OpenGL, Python and GD (Boutell) for graphics.

The system functionality is similar to both Earthworm and SeisComp3 in the sense that it detects events and records them. It does not have the many utilities and advanced features for automatic processing of these systems, but has the advantage of recording events and S-files (event parameter files) directly into the SEISAN database (Havskov and Ottemöller (1999)) ready for processing without further steps.

The installation and configuration however, is simple and the manual processing through SEISAN of recorded events and continuous data in the Seiscomp3 ring buffer system is very easy.

The SEISAN system is mainly working with event data, so for each event there is one ASCII file (so called S-file) containing all parameter data for the event as well as a link to the corresponding waveform file(s) or position in the SeisComp3 archive. The S-files are organized in a data base like structure which can be accessed through a main processing program. The main task for a real time system is then to create this S-file and the corresponding waveform files and put them into the correct location in the data base.

RTQUAKE has several independent modules of which the trigger-recording module RTDET is the core module. The user can chose to run several other modules depending on the degree of monitoring that is desired. Common for most modules is that they read incoming streams from a SeedLink server (SeedLink clients).

RTQUAKE has an option for doing automatic location of events that works reasonably well when the phase-picker is able to find well defined phases on a sufficient number of stations. In general the automatic location option works better for local and regional events with a magnitude from 2.0 and above. The calculated locations should be used as indicators and by no means as a final determination of an event location.

The automatic magnitude that is calculated is based on the events coda, in this case from the event onset until the de-trigger of the event. An option to calculate  $M_L$  and  $M_w$  (from spectral analysis) is also available.

RTQUAKE has also an option for "close-to-real-time" automatic location of events. Data-buffers entering the system from the seismic network can be examined immediately for P phases. When a sufficient number of phases have been detected (specified in the parameter file), the system will try to compute a preliminary location and a magnitude if the specific parameters are set in the parameter file. As more phases are detected from other stations, new locations are computed. A parameter set the length of the time window in which phases have to be detected. Depending on the length of the time window, S phases are also included in the location process if the event is local.

The success of automatic location on both complete recorded events and "close-to-real-time" data will depend on several factors. Noisy data, gaps and spikes in the data, long distance between stations, low magnitude (signal to noise ratio) are all factors that will make an automatic location very complicated. Spikes and noise may produce false phase readings and result in wrong locations or no locations at all. P and S phases (and noise) may be wrong interpreted and give wrong results.

It is recommended that the user creates a simple start configuration to get an idea of how the detection works, adjust the trigger levels, look at recordings in SEISAN, check for data quality, remove noisy stations from the trigger configuration etc.

RTQUAKE has an option for computing local magnitude ( $M_l$  and  $M_w$  from spectra) automatically (using a SEISAN module) provided that the response-files for the stations are present. For the test configuration the response files for the stations are supplied in the distribution and should be copied into the SEISAN CAL catalogue.


RTQUAKE can be configured to run single-network, subnets and to read data from different SeedLink servers. The SeedLink servers can be digitizers that support the SeedLink protocol, local or remote SeedLink servers that provide data from a single seismic network or from international SeedLink servers that provide data from a lot of international seismic stations. It is important to note that the user must ensure the SeedLink servers used in the configuration allow the RTQUAKE system both to read data buffers and to extract wave data from the archives. In some cases it can be practical to install a local SeedLink server to receive the data from the different stations and let RTQUAKE retrieve data from this local SeedLink server.

In the case where the seismic stations are spread over a geographically big area it would make sense to configure subnets from for example the northern part, the southern part, the eastern and western part. Events would then be recorded from the specified regions. The subnets can overlap in the sense that several stations from one region also are defined in another region.

Several subnets can be defined within one instance of RTQUAKE.


In Chapter 5 several different configurations are discussed in detail.

The figure below explains some possible configurations:

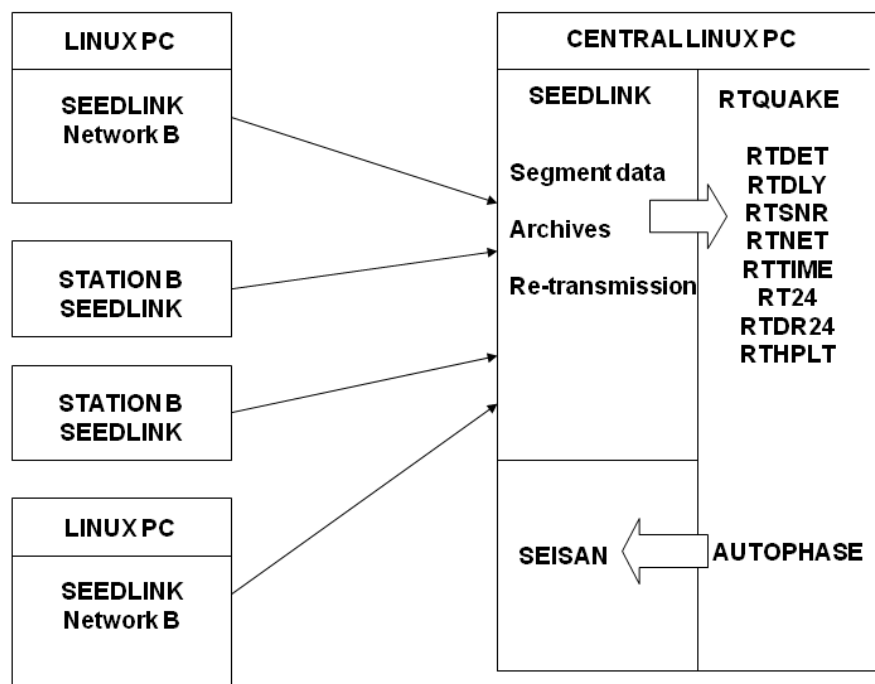

**Figure 1.1** A typical RTQUAKE configuration using input-data from one or more SeedLink servers. The data enters a local SeedLink server before being processed by RTQUAKE in order to have direct access from SEISAN to the archive with continuous data. See Chapter 13-21 for documentation on the different modules.

- In this configuration RTQUAKE runs on the same computer as the local SeedLink server receiving data and SEISAN.
- Data from different SeedLink servers and stations are fed into the local SeedLink server and RTQUAKE connects to the local SeedLink server as a client, selecting the components that will be used for detection.
- Detections are recorded directly in the SEISAN database with the corresponding S-file.
- The events can be processed manually immediately.
- The software includes an automatic phase picking option to include phases in the S-file. Optionally automatic location and magnitude can be done based on these readings.
- The software includes an automatic phase picking option that works in "close-to-real-time" that can give very fast preliminary location and magnitude.
- SEISAN has direct access to the SeedLink server archive.

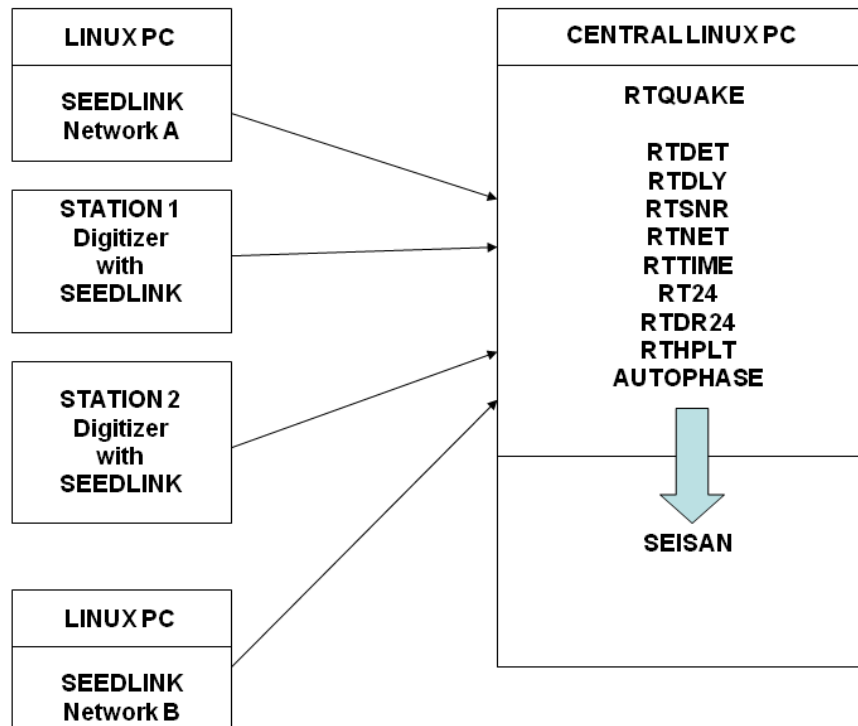

**Figure 1.2.** An alternative configuration is that RTQUAKE is configured to read directly from external SeedLink servers or digitizers that support the SeedLink protocol. You then do



not need a local SeedLink server installed locally, but you will lose the direct access to the SeedLink archive from SEISAN.

The distribution comes with a test setup so immediately after installation; the system can be tested with real data.

## 2 Updates version 2.2

Mail: The possibility to send mail when an event is processed now have 4 different options that can be set in the rtquake.par file:

MAILn

Send mail to address if n=1,2 or 3. If n=0, no mail is sent.

N=1: Mail is sent containing auto-location, magnitudes if any, s-file and a link to map with epi center marked.

N=2: As for N=1, plus mail with location based on very early P phases inside window defined in parameter TIMEWINDOW below. Any S phases found inside TIMEWINDOW will also be used if specified in parameter RTPHASES below.

N=3: As for N=1 and N=2 but an additional mail including the filename of a recorded event. This mail is sent when recording has finished.

**Be aware that the different mail options can cause a lot of emails to be sent. The options can be useful during testing of different parameter settings.**

New optional routine: RTGMT To produce a variety of GMT maps.

This is a routine that dynamically produces different bash scripts depending on the command line input arguments.

The routine uses the GMT - The Generic Mapping Tools, Version 5.2.1 64-bit.

The user must install the GMT software.

Another dependency is the gv Postscript and PDF viewer for X that must be installed on the system.

## 3 INSTALLATION

Pre-requisites:

Before installing RTQUAKE, some third party free software must be installed.

### 3.1 SeedLink

RTQUAKE routines will only work when there is access to a SeedLink server locally or remotely. If a local SeedLink server will be used, it must be installed. The SeedLink server is part of SeisComp 2.5 or SeisComp3. Version 2.5 is public software and is included with RTQUAKE in the SeedLink catalogue in the distribution together with the user manual. SeisComp3 can be found at: <http://www.seiscomp3.org>. A local SeedLink server is not needed if you only want to run the test example or want to collect data from already existing SeedLink servers.

### 3.2 Graphics libraries

All graphics modules use OpenGL and/or the GD library by Thomas Boutell.  
The following libraries must be installed:

GD library (In Ubuntu: search for gd with the Synaptic Package Manager or with the Ubuntu Software Centre and look for: Generate graphs using the GD library). Select “**libgdchart-gd2-xpm-dev**”. Generate graphs using the GD library (development version). When you select this package, other needed packages will automatically be installed.

OpenGL (In Ubuntu: search for glut or freeglut with the Synaptic Package Manager or Ubuntu Software centre and look for: glut. Select “**freeglut3-dev**” OpenGL Toolkit development files. When you select this package, other needed packages will be automatically installed.

Python. (In Ubuntu: search for **python** and **python-tk** and install both)

For mail support you need to install **ssmtp** and **mutt**.

GD library (In Centos: yum search gd)

OpenGL (In Centos: yum search glut)

### 3.3 SEISAN

SEISAN for data analysis must be installed before using RTQUAKE as recorded events are stored in the SEISAN database and SEISAN programs are used for the manual and automatic processing. SEISAN is found at [www.seisan.info](http://www.seisan.info)

### 3.4 STEP-BY-STEP installation of RTQUAKE

RTQUAKE can be installed on a standard installation of Linux. It has been developed and tested under Linux Centos, Ubuntu and Fedora.

#### STEP 1:

It is assumed that there exists a user account in which to install RTQUAKE. If not or you want to use a separate account, then first create a user account with a username and directory name. An account **seismo** will be used throughout this manual, but any account name will work.

Username: **seismo**

Password: selected by the user.

This will create a home directory: /home/seismo.

Log into this account to start the installation.

#### STEP 2:

Make a directory for the RTQUAKE installation. Can be any legal directory name.

```
mkdir mydir
```

```
cd mydir
```

#### STEP 3:

RTQUAKE is distributed as rtquakeddmmmyy.tar or rtquakeddmmmyy.tar.gz file, where dd is day, mmm is month and yy is year, for example: rtquake06feb12.tar. The distribution can be found at:

<ftp://ftp.geo.uib.no/pub/seismo/SOFTWARE/RTQUAKE>

Download the distribution file to the directory you just created and uncompress the file and unpack the distribution:

```
gunzip rtquakeddmmmyy.tar.gz
```

```
tar -xvf rtquakeddmmmyy.tar
```

A directory structure has now been installed with programs, parameter files, data files, temporary files etc. For details see Chapter 8 and 9. The most important for the user operation are:

/home/seismo/mydir/par

Parameter files for the different modules. Each setup of parameters is in a named subdirectory which contains several parameter files for the particular setup. An

example is the DEMO1 directory with the parameter files for the test run.

/home/seismo/mydir/par/DEMO1	Test configuration (Test run example)
/home/seismo/mydir/wrk	Work catalogue for testing of software
/home/seismo/mydir/rtq_web	This catalogue is by default placed under the mydir catalogue, but can be moved to any catalogue as long as this is set up correctly in the installation (see STEP 4). It contains several sub-catalogs containing information for web-pages, maps and helicorder plots. Below is a short description of each sub-catalog:
rtq_web/cod	Figures and html files used to show Figure 4.7
rtq_web/pph	Figures and html files used to show Figure 4.6
rtq_web/map	File containing all automatic locations (used in maps), figures of maps, html files for web-pages, Figure 4.3-4.4-4.5-4.8.
rtq_web/png	Helicorder index.html and unfiltered helicorder plots
rtq_web/png_filt	Helicorder indexflt.html and filtered helicorder plots
rtq_web/tmp	Unfiltered waveform for helicorder plots
rtq_web/tmp_filt	Filtered waveform for helicorder plots
rtq_web/loc	Links to static Google map showing locations and plots used in web pages.

#### STEP 4

Set environment for where RTQUAKE is installed:

In the /home/seismo/mydir/com directory there is a setup file that must be sourced. This can be done from the command line or from the .cshrc or .bashrc file depending on the shell used in your account. Check what shell is used with the command:

```
env | grep SHELL
```

**Edit the setup\_rt.csh or setup\_rt.bash file in the /home/seismo/mydir/com catalogue before sourcing it so that it corresponds to your environment !!**

**Modify the line that define the RTQUAKE\_TOP to fit your RTQUAKE catalogue.**

**RTQUAKE expects to find SEISAN installed on the system and the environment variable SEISAN\_TOP defined, see SEISAN manual.**

**Also modify the line that defines the HTML\_TOP to fit the path to your rtq\_web catalogue.**

for csh:

Include the following line at the end of your /home/seismo/.cshrc file:

**source /home/seismo/mydir/com/setup\_rt.csh**

for bash:

Include the following line at the end of your /home/seismo/.bashrc file:

**source /home/seismo/mydir/com/setup\_rt.bash**

When you now open a new terminal window the correct environment will be active.  
Continue with STEP 5 to compile the software.

## **STEP 5:**

Installation and compilation of the complete RTQUAKE package:

**cd /home/seismo/mydir**  
**make clean**  
**make rtquake**  
**make install**

Change to the RTQUAKE work directory or to a working directory in your home directory.  
This is to avoid temporary output files to be mixed with the RTQUAKE software:

**rtwrk** will change directory to /home/seismo/mydir/wrk.

RTQUAKE is now ready for operation.

You can now go to chapter **4 TEST RUN INCLUDING MONITORING** to check that the demo setup works. To prepare a complete setup continue with section 3.5 below.

### **3.5 Additional setup for cron-jobs, helicorder plots etc.**

Modify the scripts below according to the SHELL and paths you are using.

cron\_restart.bash

cron\_restart\_heli.bash

start\_heli.bash

start\_rtdet.bash

cron\_restart.csh

cron\_restart\_heli.csh

start\_heli.csh

start\_rtdet.csh

start\_rtdet.csh

## 4 TEST RUN INCLUDING MONITORING

### 4.1 Aliases, scripts and parameter files to start the test run

A set of parameter files has been prepared to test the installation of the RTQUAKE package. The SeedLink server at GFZ Potsdam, Germany is used. The server has both public and restricted data.

To demonstrate the use of the software, the non-restricted data from the Integrated Plate boundary Observatory Chile (IPOC), GFZ Potsdam, Germany in northern Chile are used.

As this is a very active seismic area, new events will normally be detected and recorded within a few minutes. In some cases several stations may have data "fall-outs", i.e. no data are transmitted. This can cause that events are not detected as the trigger criteria are not met.

To test the software, the setup files and parameter files have been prepared. The user can use these as recipes for setting up a configuration for an actual network. For details of the test configuration see Chapter 5.

#### **Important note:**

**As of 15 July 2016 GFZ Potsdam has disabled all time window requests on their public Seedlink server.**

**To make examples in this version of RTQUAKE work as described, a local Seedlink server at Institute of Earth Science, University of Bergen has been configured to give access to the data used in the examples. The IP address for this server has been replaced in the example configuration files.**

### 4.2 Update the STATION0.HYP file

In SEISAN version 10.1 and later, the IPOC stations are included in the STATION0.HYP file. If you are using a different STATION0.HYP file, the IPOC stations must be added if you want to locate events recorded during the test run. The file IPOC.TST file with station locations (in SEISAN format) in /home/seismo/mydir/par must then be included in your STATION0.HYP file.

### 4.3 Start and Stop test run

Two aliases have been prepared to start and stop the RTQUAKE test run:

***rtstart*** *arg1* *arg2* where *arg1* is the catalog under mydir/par where the parameter files are stored and *arg2* is the address or ip number to the Seedlink server from where the data is plotted. The ***rtstop*** will stop all processes running under RTQUAKE.

To start the test, type:

**rtstart DEMO1 129.177.55.30**


This command will start RTQUAKE

**rtstop**


This command will stop the data acquisition and the graphic monitoring.

Output from test run:

After executing the start command, you will after some seconds see a plot showing the signals in real time (Figure 4.1) and a plot showing indication of the trigger times and duration of triggers (Figure 4.2).

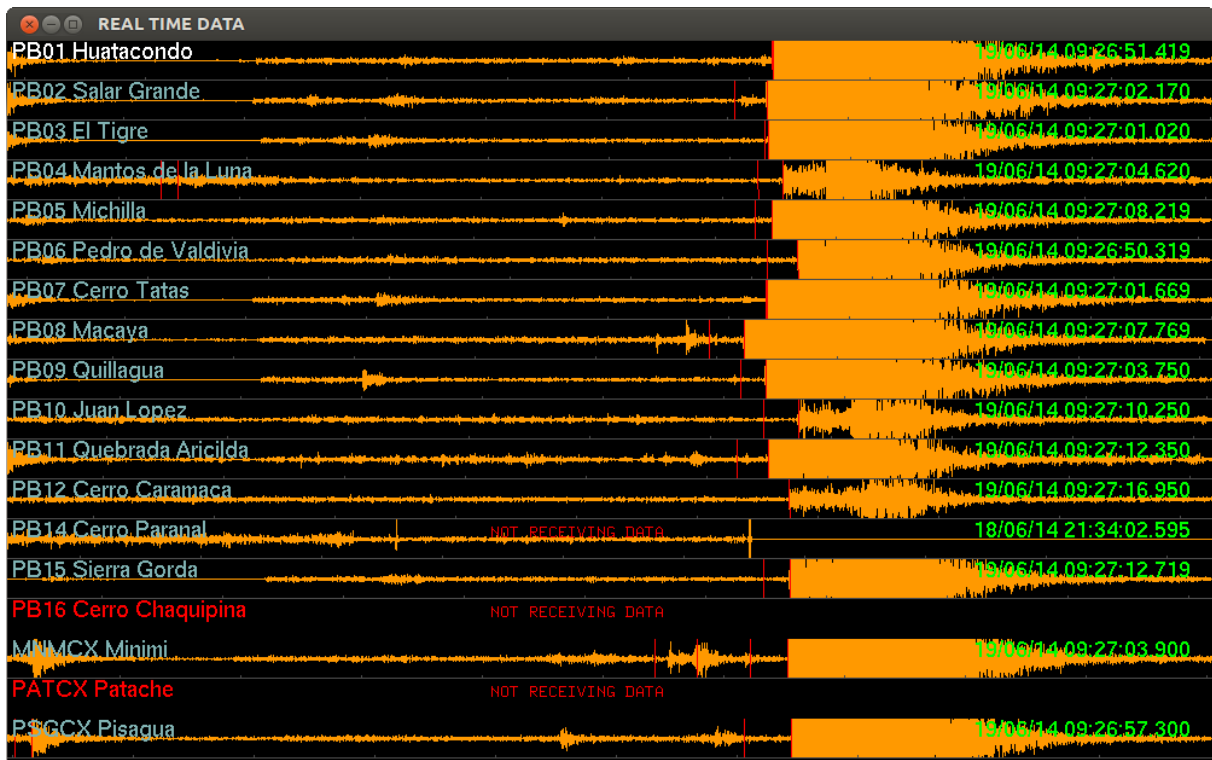


**Figure 4.1** RTNET shows the signal from selected channels in “near-real-time”. It also indicates when channels are not transmitting data as for station PB14, PB16 and PATCX in this case. The red vertical lines indicate possible triggers, and are inserted when the traces are filtered. These triggers are not the RTQUAKE triggers computed by the RTDET module. Several instances of the program can be executed to show different stations, to apply different band pass filters, different color schemes, different window sizes and different positioning on the screen.

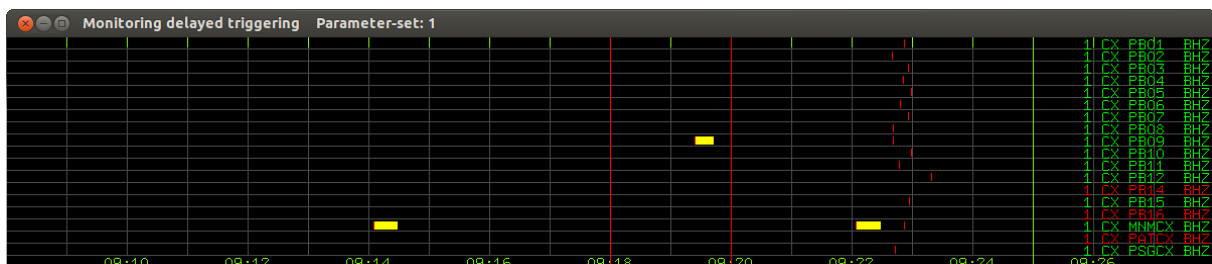

a)



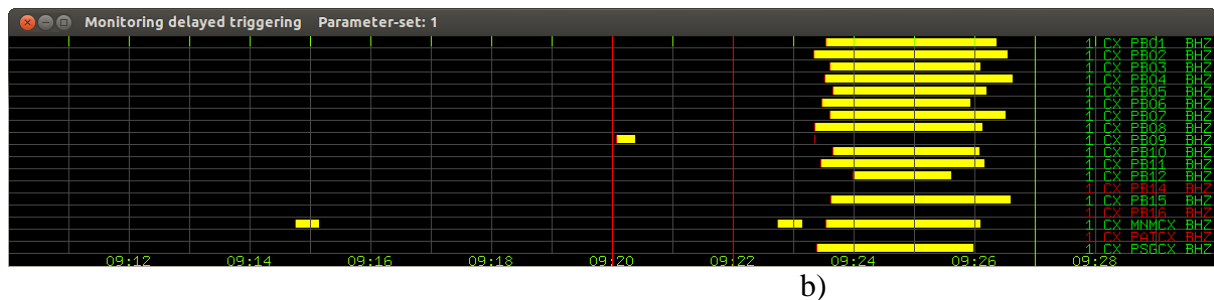

**Figure 4.2** RTDLY shows the onset and duration of triggers (yellow lines) for individual channels. When a trigger starts on a particular channel, this is indicated with small red vertical lines at the trigger time. When the trigger is turned off, the duration of the trigger is indicated with a yellow line. The green vertical line to the right indicates the current time. The two vertical red lines indicate the array-propagation-window (APW) within which the network detection is performed. Note that this check is delayed 10 min to make sure all station data has arrived. The delay is a parameter. The text on the right, for example 1 CX PB01 BHZ, displays the subnet number, network id, station name and component respectively. Figure 4.2 top shows the onsets of triggers at a) while the bottom figure shows the situation a minute later at b). Most triggers are now turned off and the duration of the triggers are marked in yellow. The triggers will finally reach the Array-Propagation-Window (between the two vertical red lines) and a network trigger will be declared if sufficient triggers are flagged. Station names marked with red color indicate that the stations are not receiving data.

#### 4.4 Optional web pages and graphics

If the default test run records some events and manage to do a location, several maps are generated automatically that can be shown in a standard browser. The different maps have different information, but at least the automatically calculated location of the event.

The graphics can be used on for example monitor screens to continuously show the current seismic activity.

The user can move the /home/mydir/rtq\_web catalogue structure to a web-server area so that users can monitor the activity remotely as from a normal webpage. It is important that the new path is changed as described in the installation STEP 4.


#### 4.5 Reverse Geocoding

In the parameter file there is an option to turn on what is called "Reverse Geocoding". The automatically calculated latitude and longitude for an event can be used in a request to a public server (Mapquest) to get the geographical name of the location returned to RTQUAKE. The name is returned in UTF-8 coding and will be in the local language for the location. The option is shown in some of the examples that follow. As the text format is in UTF-8, the location text cannot be used in the SEISAN s-file.


#### 4.6 Examples of optional graphics

/home/seismo/mydir/rtq\_web/map/LAST\_TRIG.html will show Figure 4.3 or Figure 4.4 on the screen with the stations and the suggested location marked. Clicking on the station markers will show the signal for that station if generated. This link will only show the last located event. A parameter file /home/seismo/mydir/rtq\_web/map/map.par control the zoom-

level, maptype id, number of previous event location to plot and if the red marker should be blinking or not.

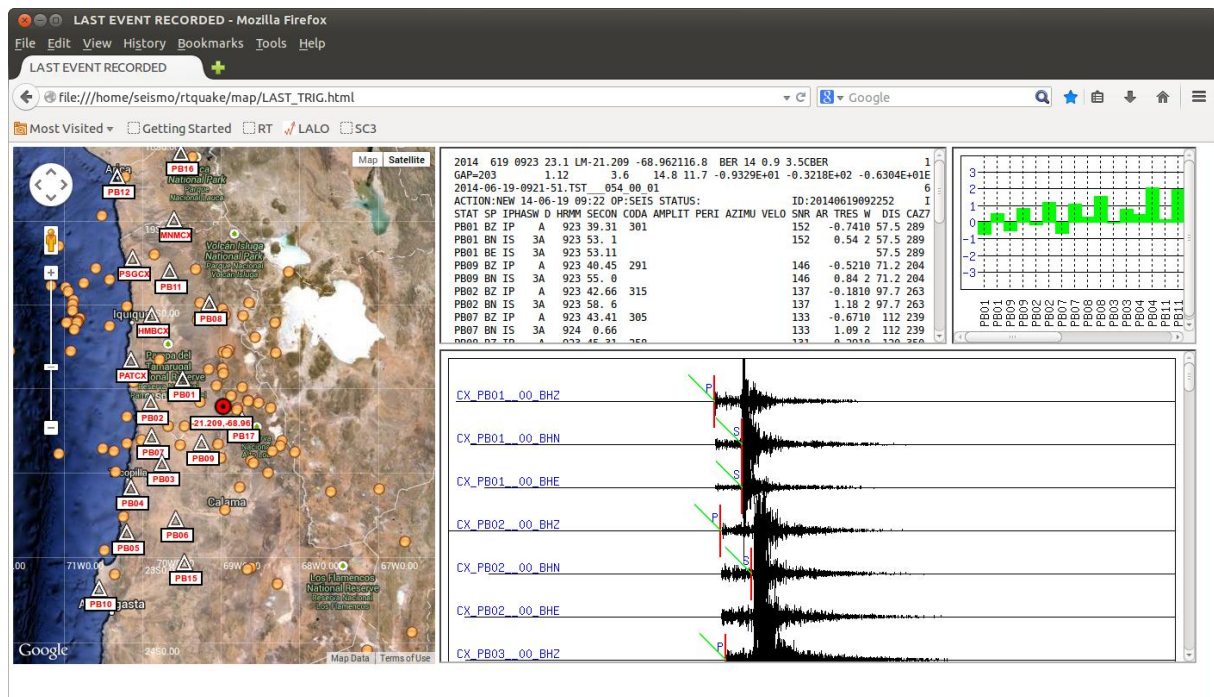

**Figure 4.3** Web page showing location of last located event. Maptype set to HYBRID.

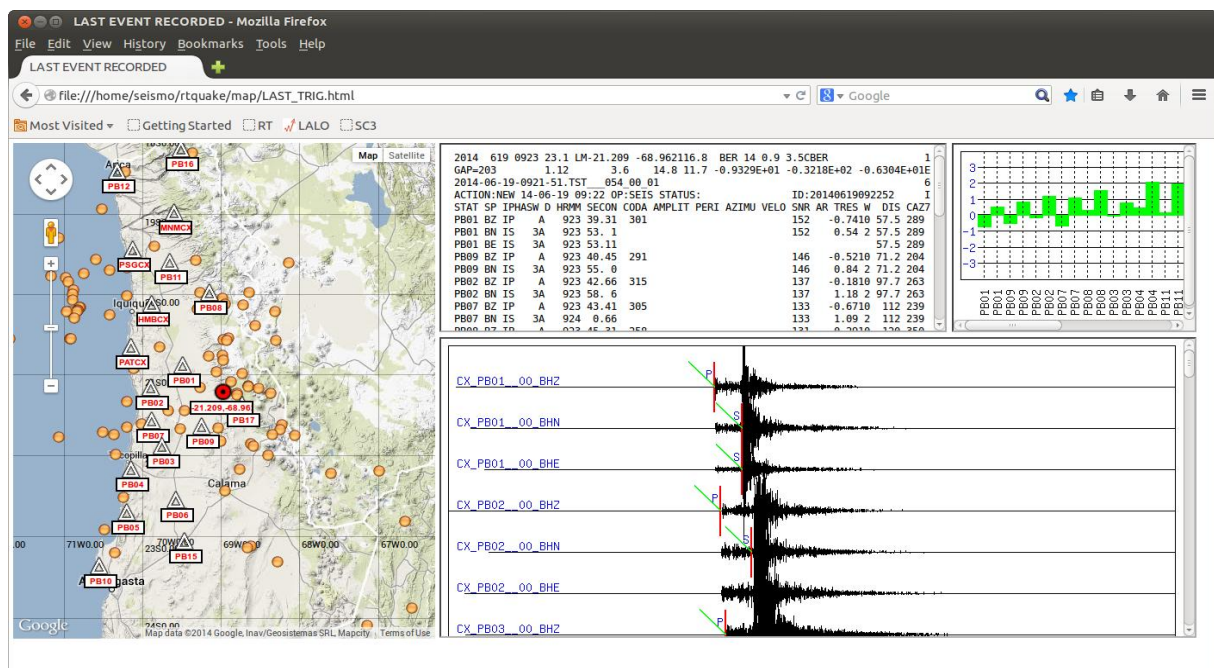

**Figure 4.4** Web page showing location of last located event. Maptype set to TERRAIN.

The left window in the browser shows the map with the stations shown as triangles and name. The calculated location is marked in the center of the map with the red circle and the coordinates below.




Initially the window right-below shows the recorded signals with phases marked. Clicking on one of the stations on the map will show the signals from that station only if existing, with the suggested phases.

The window center-top shows a listing of the s-file for this event.

The window right-top shows a plot with the residuals for each component with a phase reading.


`/home/seismo/mydir/rtq_web/map/AUTOLOC_MON.html` shows the webpage in Figure 4.5. The page shows the last automatically located event with an information label that gives a geographical name of the event location, the UTC time, location and the magnitudes Mw and MI if available.

The size of the dots represents the magnitude of the events. The red dots are the 20 most recent events.

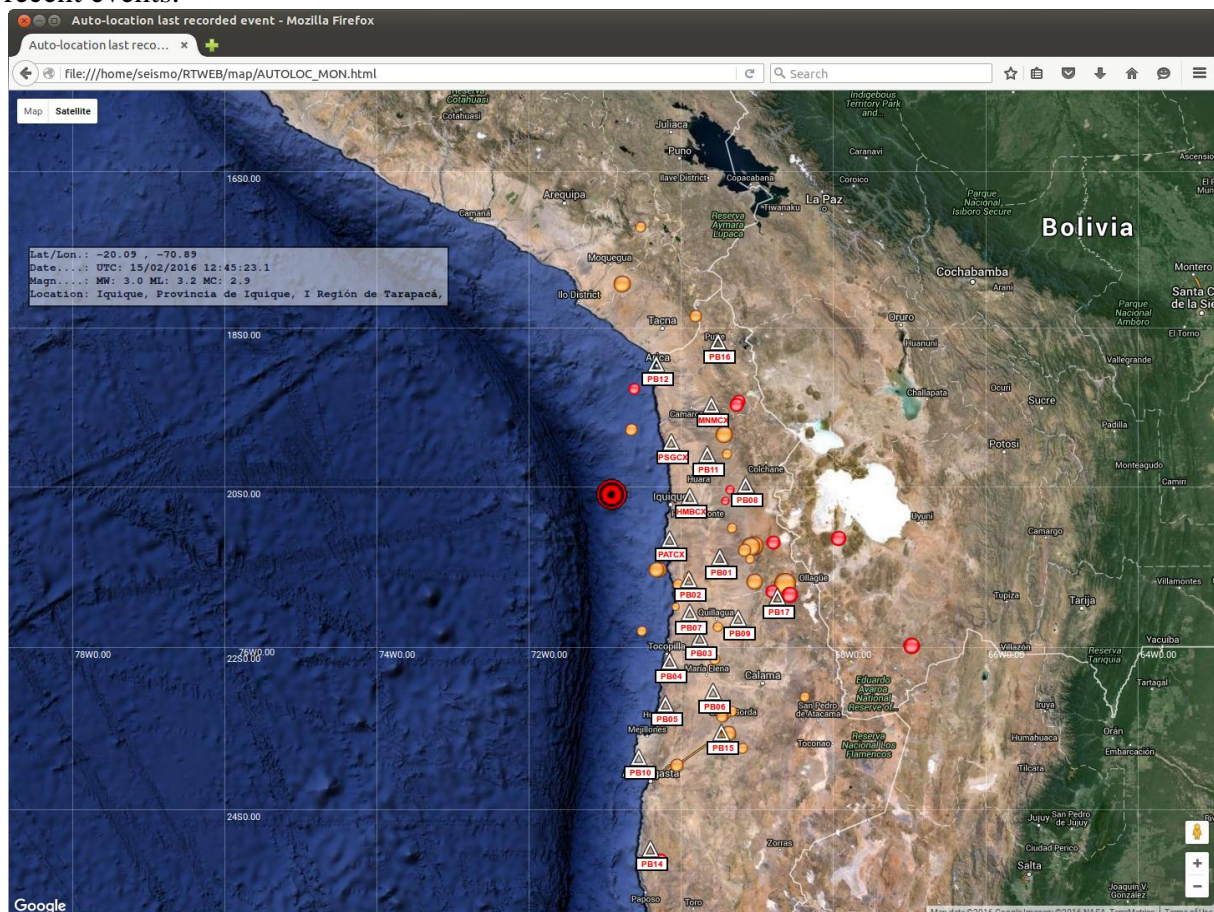


**Figure 4.5** Web page showing geographical name, UTC time, locations and Mw and MI.

`/home/seismo/mydir/rtq_web/map/AUTOLOC_RT.html` shows the page in Figure 4.6. This page is generated by the "close-to-real-time" location process and contains the current preliminary location, the geographical name (reverse geocoding), UTC time, location and Mw if available. On the right the last generated SEISAN s-file. The page is dynamically updated when new locations are available. The user can click on the menu to the left of the header and select a time to have a look at recent locations.

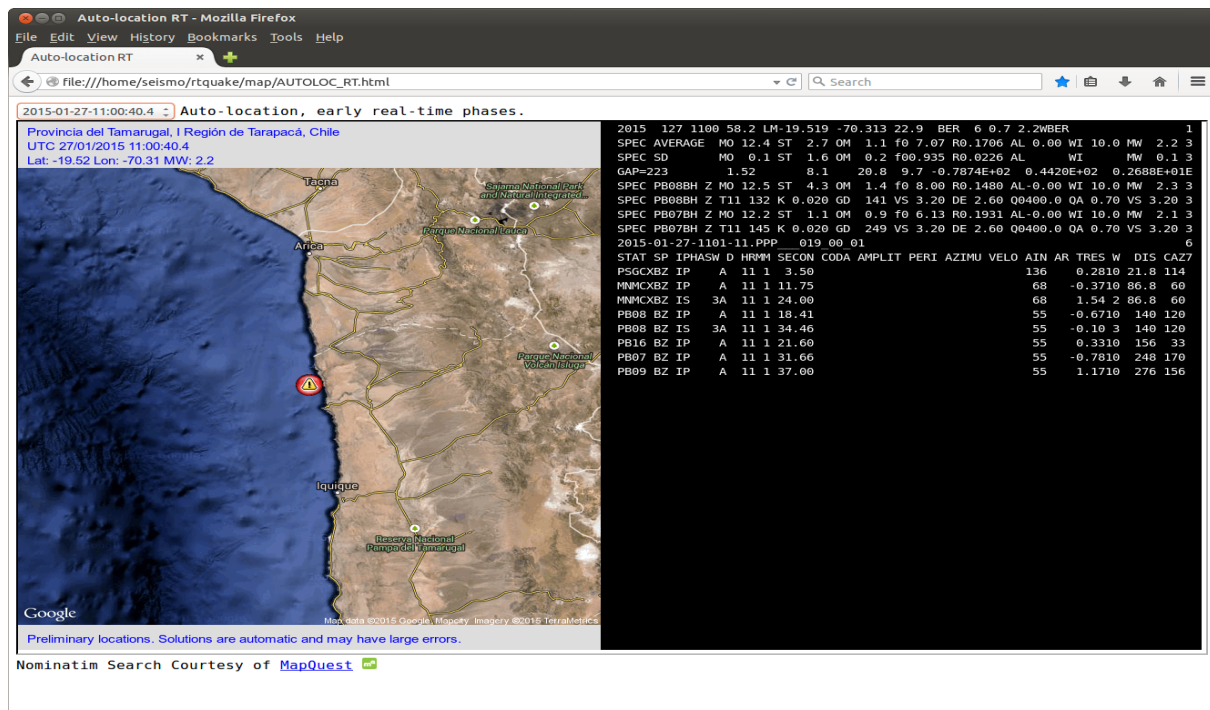


**Figure 4.6** Web page showing dynamically updated maps for "close-to-real-time" locations. /home/seismo/mydir/rtq\_web/map/AUTOLOC.html shows the page in Figure 4.7. The page shows the same information as for Figure 4.6, but it is generated after the complete waveform file for the event has been stored and processed by the auto location process.

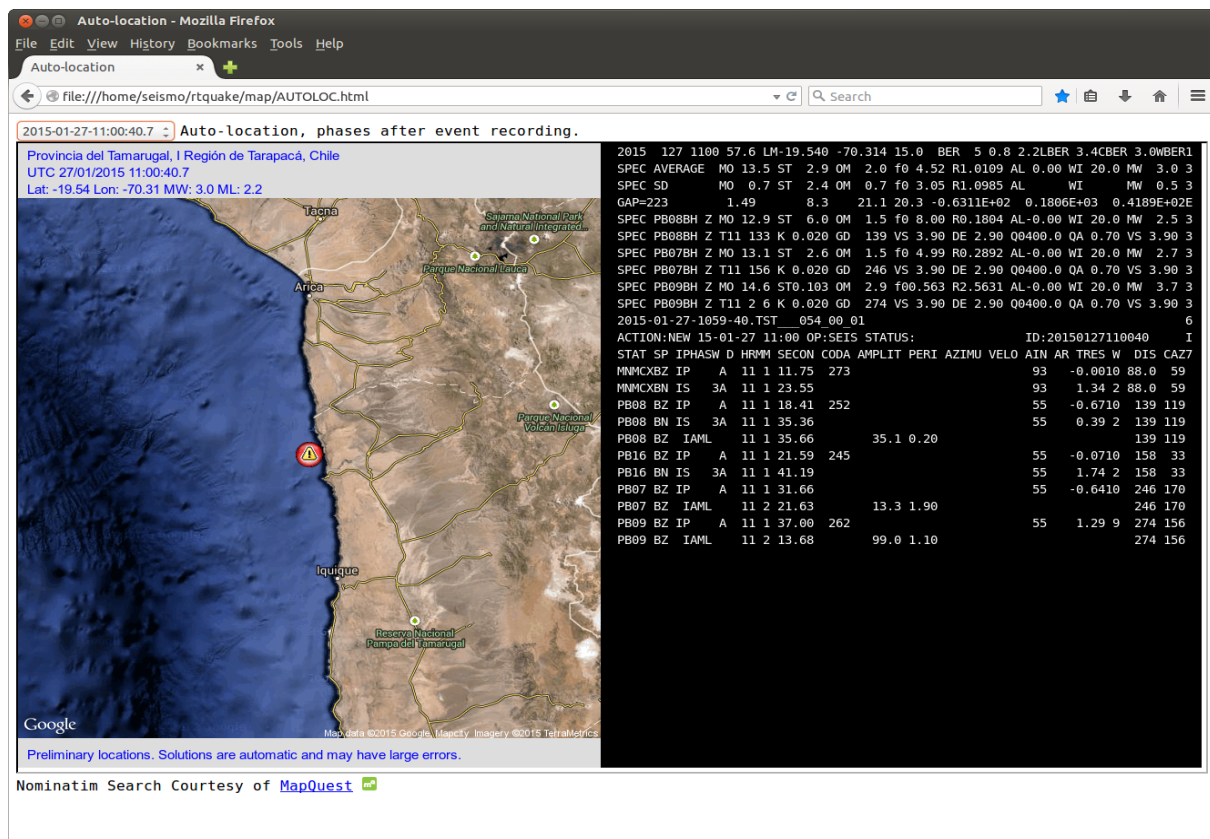

**Figure 4.7** Web page showing the auto location based on processing the complete waveform.




The python script **rtloc** shows a dynamically update of a map with last automatic location from "close-to-real-time" phase picks or from a complete recorded event. The header information is also updated dynamically. Just after an update, the header background color is set to red to indicate a recent new location. After a while the color turns back to gray.

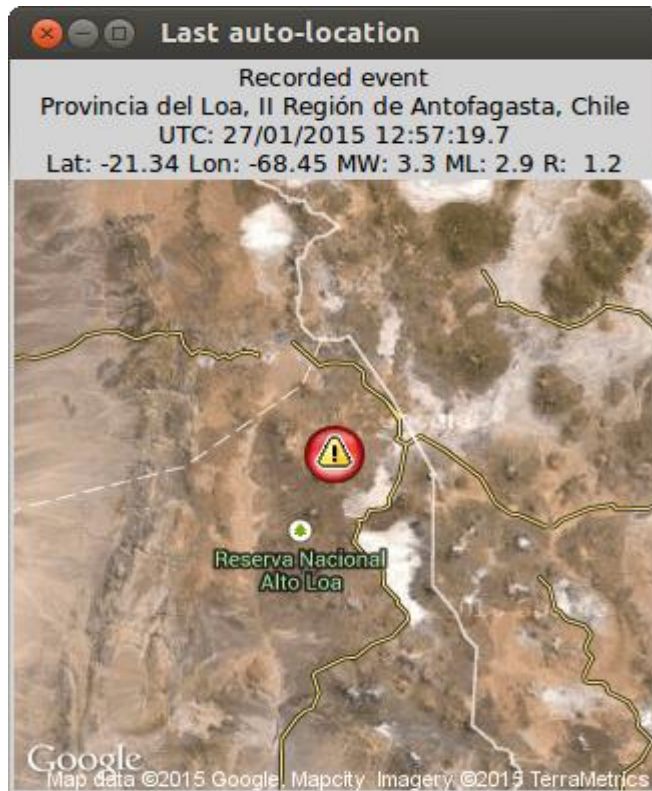


**Figure 4.8** Dynamic map created by the python script **rtloc**.  
The parameter file for the web pages is described in detail in 4.7.

In the catalog `/home/seismo/mydir/rtq_web/loc` you can find links to recent locations up to the current time. Entering a link in your browser will show a static map as in Figure 4.9 below with the suggested automatic location.

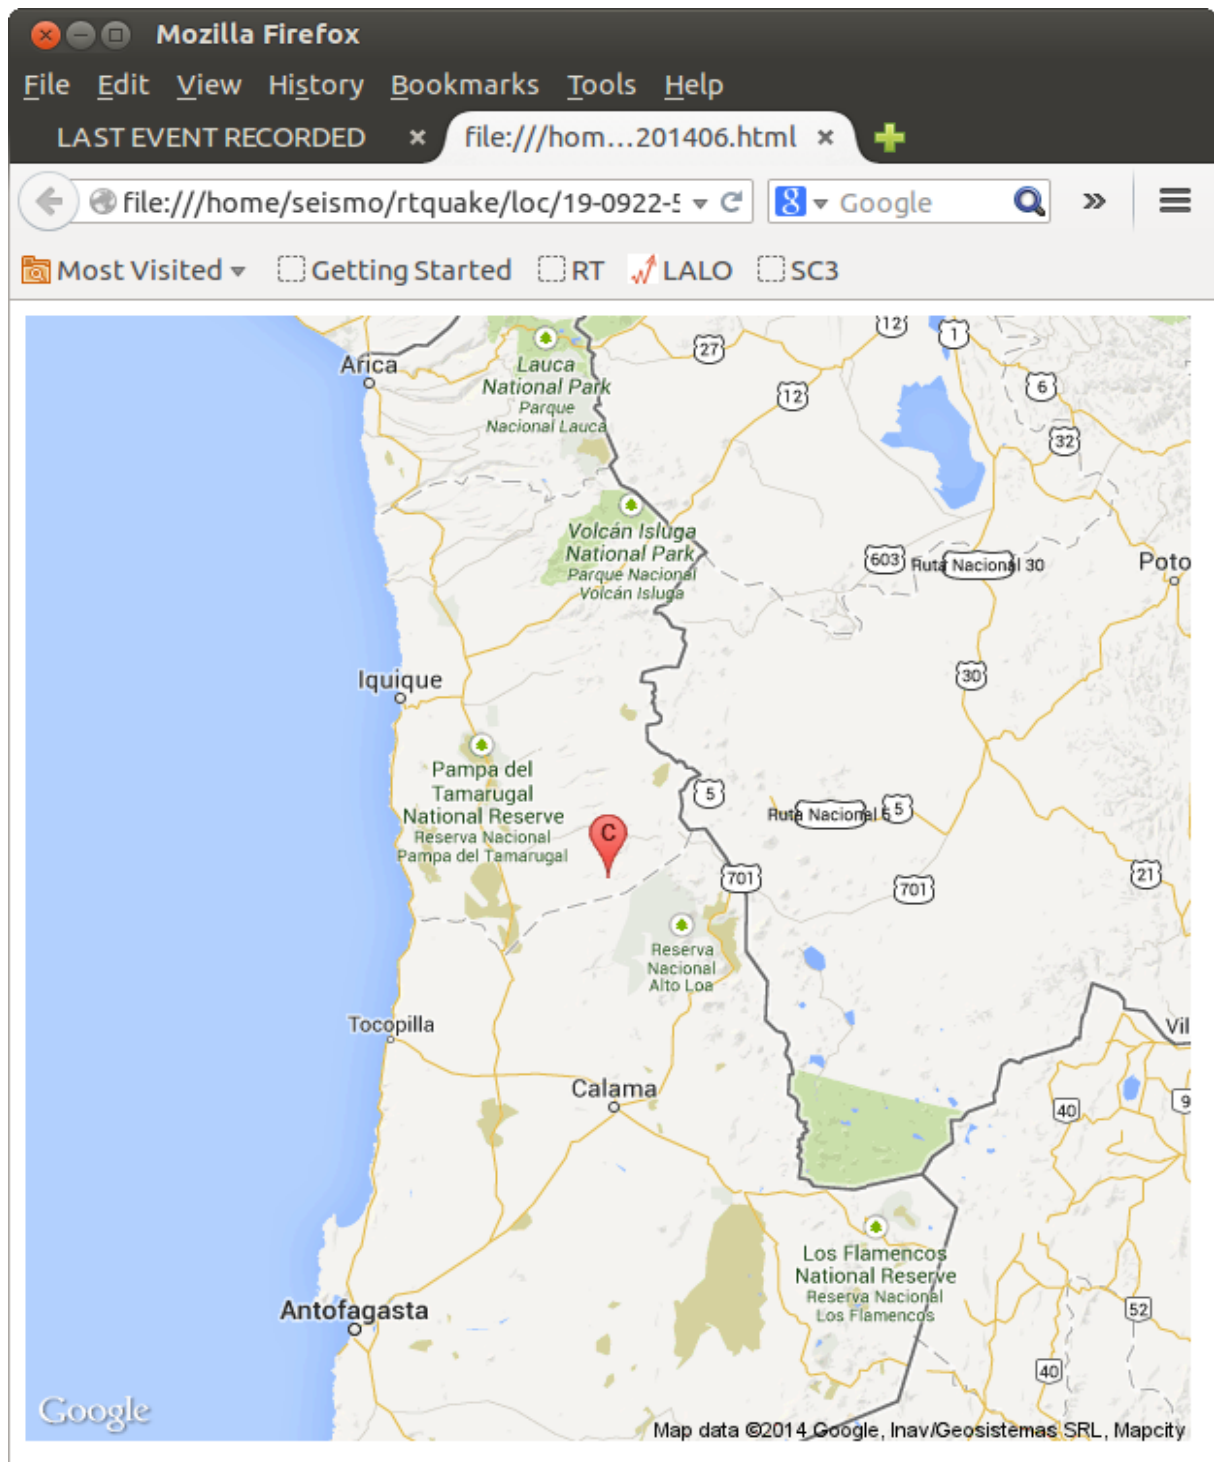

**Figure 4.9** Static Google map generated by RTQUAKE.

In the DEMO1 test run, the detected events are stored in the SEISAN data base TST. In order to check the events, use SEISAN command `eev 201406 TST` (for events in June 2014), find the event and write "po" to e.g. plot the event (Figure 4.10). For more details see SEISAN manual.

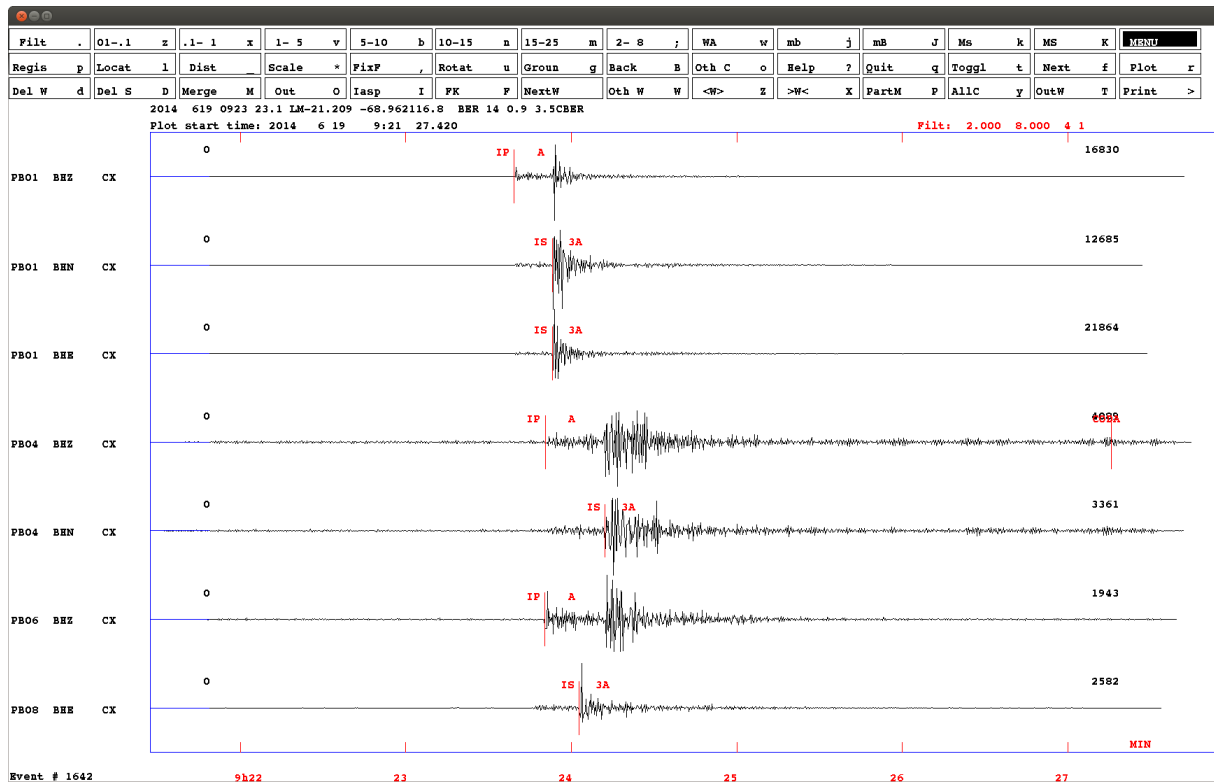

**Figure 4.10** Recorded event plotted by SEISAN. “A” means automatic.

The recorded event can now be plotted and processed by SEISAN. The test run is configured to pick phases and they are shown on the plot as in Figure 4.10.

In the test-run, the events waveform files are stored in the SEISAN WAV catalog structure (e.g. /home/seismo/WAV/TST\_/2014/06/xxx and the database is called TST\_ as set up in the test parameters (see Chapter 5).

For the test run, the IPOC.TST file in /home/seismo/mydir/dist must be included in the STATION0.HYP file to enable location of events. The IPOC.TST file contains the coordinates for the IPOC stations used in the test. If SEISAN10.1 or later is used, the stations are already installed.

To process an event, change to the WOR catalog (wo) (or any other catalog you want to work in) and run eev for the actual date, for example: eev 20130110 TST

The test setup can also generate helicorder plots (see the examples in Chapter 22) and send out mail (see Chapter 13).

## 5 PARAMETER FILES, SCRIPTS and ALIASES

### 5.1 Overview of configuration and parameter files, scripts and aliases

The following is a description of the different configuration and parameter files in RTQUAKE that the user has to adjust to the actual environment and network.

In /home/seismo/mydir/com:

#### **rtquake.par**

Configuration file where the user can adjust some RTQUAKE system parameters such as where to write event files, if the system should do auto-location or not, if the system should calculate Ml and Mw or not, if the system should send a mail when detections occur etc. The file is described in 5.2

In /home/seismo/mydir/par/user\_created\_subdirectory:

Parameters for one particular setup is in a directory called user\_created\_subdirectory (name decided by user, an example was TEST1)

**rt\_config:** This file defines the channels and SeedLink servers for one of several subnets using the same SeedLink servers, trigger parameters etc. See 5.3

**streams\_plot:** streams to input from SeedLink server for continuous plot (RTNET module). See 5.5

**stations\_plot:** selected components of streams, station description for continuous plot (RTNET module). See 5.5

**rtsl\_config:** selected components of streams and SeedLink servers for continuous plot (RTSLPL module). See 5.6

**streams\_heli:** streams to input from SeedLink server for heliplots. See 5.7

**stations\_heli:** stations to plot, factor to amplify signals, filters. See 5.7

Aliases defined in the /home/seismo/mydir/com/setup\_rt.bash and setup\_rt.csh:

**\$RTQUAKE\_TOP is set in /home/seismo/mydir/com/setup\_rt.bash or setup\_rt.csh.**

**alias rtstart='\$RTQUAKE\_TOP/com/rtquake\_start'**

Start the rtquake\_start script See 5.8

**alias rtstop='\$RTQUAKE\_TOP/com/rtquake\_stop'**

Start the rtquake\_stop script. See 5.8



**alias rtloc='\$RTQUAKE\_TOP/com/rtloc.py'**

Shows last autolocation on small map with geocoding. See Figure 4.8.

**alias rtheli1='\$RTQUAKE\_TOP/com/rtquake\_heli\_tst1'**

Start the rtquake\_heli\_tst1 script. See 5.9

**alias rtheli2='\$RTQUAKE\_TOP/com/rtquake\_heli\_tst2'**

Start the rtquake\_heli\_tst2 script. See 5.9

**alias rthom='cd \$RTQUAKE\_TOP'**

Change directory to /home/seismo/mydir

**alias rtcom='cd \$RTQUAKE\_TOP/com'**

Change directory to /home/seismo/mydir/com

**alias rtrtdet='cd \$RTQUAKE\_TOP/rtdet'**

Change directory to /home/seismo/mydir/rtdet

**alias rtpar='cd \$RTQUAKE\_TOP/par'**

Change directory to /home/seismo/mydir/par

**alias rtut='cd \$RTQUAKE\_TOP/utis'**

Change directory to /home/seismo/mydir/utis

**alias rtwrk='cd \$RTQUAKE\_TOP/wrk'**

Change directory to /home/seismo/mydir/wrk

## **5.2 RTQUAKE system parameters: rtquake.par**

In this file you specify if you want s-files created and how. You can also specify if you want auto-location, some parameters for the Filterpicker (phase picking routine) and how the delayed trigger should work.

An example file is included below where the parameters are explained in some more detail.

The FilterPicker routine process each component of recorded data trying to identify P and S phases and their onset time.

The parameters marked 'FilterPicker' are default parameters for the FilterPicker module and should not be altered. The parameters are described in Lomax et al. (2012).

For the automatic location option to work, the coordinates of the stations must be included in the SEISAN STATION0.HYP file. For the test configuration, the coordinates can be found in /home/seismo/mydir/par/IPOC.TST file. If SEISAN10.1 or later is used, the stations are already included.

For the automatic computation of local magnitude, the response files for the configured stations must be present in the SEISAN CAL catalogue. For the test configuration the response files are stored in the /home/seismo/mydir/cal catalogue and should be copied into SEISAN CAL directory.

For some parameters, see the respective programs.

Example of file:

The following is an overview of /home/seismo/mydir/com/rtquake.par:

This file is parameter file for rtquake.  
Only the lines with recognized keyword under KEYWORD will be read.  
The comments have no importance.  
Columns Par 1-Par 2 start in columns 41,51.

The two first parameters in this file (keep and location) are defined the following way:

keep	location	Action
-1	0/1	A new s-file is created with no phase-picks. No location. This option is used for RTQUAKE: detection + no picks + no location
0	0/1	A new s-file is created with the detection phase-picks only. No location.
1	0	A new s-file is created with all phase-picks from FilterPicker. No location. This option is used for RTQUAKE: detection + NO location
1	1	A new s-file is created with all phase-picks from FilterPicker. Automatic location. Phases causing high residuals will be removed automatically until MAX RESIDUAL (see below) and or MINSTALoc (see below) is reached. The s-file will contain the location and the phase-picks that are left. This option is used for RTQUAKE: detection + autoloc

All keywords in capital letters.

```

KEYWORD.....Comments.....Par 1.....Par 2
-----how to record s-files-----
KEEP          1:sfile,-1:no sfile 1
-----automatic location or not-----
LOCATION        1:Locate,0:No Locate 1
-----geographical name of location or not-----
GEOLOCATION     1:yes, 0:no          1
-----detail level of geographical name of location-----
GEODETAIL      6-10                 7
-----automatic local magnitude or not-----
AUTOMAG        1 compute Ml,Mw      0
-----name of SEISAN database-----
DBASENAME      For SEISAN           TST
-----SEISAN catalogue for waveforms-----
WAVEDIR        For SEISAN           WAV
-----store waveforms in database or not,1=yes, 0=no----
WAVE_DB_ACTIVE For SEISAN           1
-----max number of iterations discarding phases-----
ITERATION      Number of iterations 100.0
-----maximum acceptable avg. residual to do location---
MAX_RESIDUAL    Maximum residual     2.0
-----min. no of stations with phase reading to do location-
MINSTALOC       Min stat to locate   5
-----separate sub networks or all as one-----
ALLSUBNETS      0-sep.net >0 one net 0
-----p-phases and s-phases or p-phases only-----
PHASES          0-p, 1-p+s          1
-----minimum seconds time-difference s-p-----
MINDIFF_SP      For phase-picking    1.5
-----mail or not-----
MAIL1           0-no mail,1,2,3-mail 0   terjeu@hotmail.com
MAIL2           0-no mail,1,2,3-mail 0   abcd@online.no
MAIL3           0-no mail,1,2,3-mail 0   whatever@mail.com
MAIL4           0-no mail,1,2,3-mail 0   any@mail.com
MAIL5           0-no mail,1,2,3 mail 0   to_you@yahoo.com
-----total delay buffer trigger-----
DELAY_BUFFER    Minutes delaybuffer    20.0
-----where to set current time in delay buffer-----
MINUT_NOW       Minut current data     17.0

```

```

-----delay for trigger window-----
DET_DELAY      Detection delay      7.0
-----array-propagation-window-----
APW            Array prop. window  120.0
-----seconds to shuffle buffer don't change-----
SECONDS2SHUFLE Seconds to shift    4.0
-----pre-event in seconds-----
PRE_EVENT      Pre-event (seconds) 60.0
-----post-event in seconds-----
POST_EVENT     Post-event (seconds) 60.0
-----no of days to save heliplots-----
HELI_DAYS      No of days to save   5.0
-----filterpicker, don't change-----
FILTERWINDOW   FilterPicker         300.0
LTWINDOW       FilterPicker         500.0
THRESHOLD1     FilterPicker         10.0
THRESHOLD2     FilterPicker         10.0
TUPEVENT       FilterPicker         20.0
-----sound on or off when trigger-----
SOUND          1-sound, 0-nosound    1.0
-----printing or not-----
PRINTING       Debug printing        0
*****
* Parameters for preliminary autolocation based on "close-to-real-time" phase picks *
*****
-----auto location based on p-phase picking in real-time-----
REALTIME_PICK  0-no, 1-yes           1
-----max. residual to do loc. based on real-time phases-----
MAX_RES_PPH    Max residual rt       2.0
-----min. stations with phase reading for realtime loc.-----
MINSTALOCPPH  min. no. stations       6
-----accept p-phases in time-window: current time - seconds-----
TIMEWINDOW     seconds back in time  70
-----p-phases and s-phases or p-phases, only real-time-----
picks
RTPHASES       0-p, 1-p+s           1

```

## KEEP

How to record s-files.

-1: Record the s-file in the database, but with no phases.

1 : Record the s-file with phases

0 : Record the s-file with detection phases only

## LOCATION

Try to do automatic location.

1: do automatic location. If KEEP=-1, location will not be executed.

0: no location.

## GEOLOCATION

0: no geolocation

1: geolocation to indicate geographical name of location after an auto-location. Used in maps and web-pages.

## GEODETAIL

Level of detail in the geolocation.

## AUTOMAG

Calculate Ml and Mw

1: calculate Ml and Mw

0: no magnitude calculated

## DBASENAME

SEISAN database name (up to 5 letters)

## WAVEDIR

SEISAN waveform directory

## WAVE\_DB\_ACTIVE

SEISAN. Store waveform data in the specified directory in WAVEDIR or in a database structure under WAVEDIR.

## ITERATION

Number of times to run hyp, remove components with bad residuals and run hyp again.

## MAX RESIDUAL

Maximum residual to accept for running location

## MINSTALOC

Minimum number of stations with phase to accept for running

	location.
ALLSUBNETS	All subnets as one network or separate subnetworks. If set to zero the individual subnets specified in rtquake.par will trigger individually based on the minimum number of triggers n in the line NETWORK name, for example: NETWORK Chile 6, where 6 specify the minimum number of triggers to record an event for this subnet. If set to a positive number, all subnets will be treated as one network and the minimum number of triggers required to record an event will be the number specified here.
PHASES	0: record p-phases only 1: record p-phases and s-phases
MINDIFF_SP	Minimum number of seconds allowed between P and S phase. This parameter can be used to reduce false S-phase picks on secondary P phases.
MAILn	Send mail to address if n=1,2 or 3. If n=0, no mail is sent. <u>N=1:</u> Mail is sent containing auto-location, magnitudes if any, s-file and a link to map with epi center marked. <u>N=2:</u> As for N=1, plus mail with location based on very early P phases inside window defined in parameter TIMEWINDOW below. Any S phases found inside TIMEWINDOW will also be used if specified in parameter RTPHASES below. <u>N=3:</u> As for N=1 and N=2 but an additional mail including the filename of a recorded event. This mail is sent when recording has finished. <u>Be aware that the different mail options can cause a lot of emails to be sent. The options can be useful during testing of different parameter settings.</u>
DELAY_BUFFER	Maximum number of minutes in delay buffer.
MINUTE_NOW	Minute in delay buffer defined as current time.
DET_DELAY	Number of minutes delay before network detection.
APW	Array Propagation Window. Network detection takes place. inside this time window just after the DET_DELAY minutes.
SECONDS2SHUFLE	Number of seconds the delay buffer is shifted.
PRE_EVENT	Number of seconds to record before the trigger.
POST_EVENT	Number of seconds to record after the event has de-triggered.
HELI_DAYS	Number of days to keep helicorder plots to keep at all time.
FILTERWINDOW	FilterPicker, do not change
LTWINDOW	FilterPicker, do not change
THRESHOLD1	FilterPicker, do not change
THRESHOLD2	FilterPicker, do not change
TUPEVENT	FilterPicker, do not change
SOUND	Play sound when trigger
PRINTING	Print debug information.

The following parameters in the rtquake.par file decide if close-to-real-time location should be active. Location is based on very early p-phase readings. Waveforms containing the phases with corresponding s-files are stored in the SEISAN data base WAV/PPHAS and REA/PPHAS. If the AUTOMAG is set, a preliminary MI is calculated. Results can be seen in maps and web pages described below.

REALTIME_PICK	0: no automatic location based on p-phases not active 1: automatic location based on p-phases active (one net only)
MAX_RES_PPH	Maximum rms residual accepted to save location
MINSTALOCPPH	Minimum number of stations with phase reading to do location with real-time p-phases
TIMEWINDOW	Accept p-phases in a time-window: current time - n seconds
RTPHASES	0: use only p-phases 1: use p-phases and early s-phases that fall into the timewindow defined above.

### 5.3 RTQUAKE Station and Network configuration: rt\_config

Before starting RTQUAKE, a configuration file must be present in a sub directory of /home/seismo/mydir/par. The user must create this sub directory. The name of the sub directory can be any legal name, but it is recommended to use a name reflecting for example the name of your network, geographical area or purpose of the configuration: NNSN, GEO1, EXAMPLE etc. This name will later be used when starting RTQUAKE.

In this sub directory the user has to create a file called rt\_config (or modify an example file). The file must follow the following format described below. The lines marked with bold types are keyword lines and must be present.

rt\_config parameter file:

Below is shown part of an example configuration file and after that the explanation. The lines are numbered to help the explanation; the numbers are not part of the file.

```

1. SERVERS
2. S01 139.17.3.177 (no time window requests)
3. S02 rtserve.iris.washington.edu (no time window requests)
4. -----
5. ALLSUBNETS
6. -----
7. NETWORK IPOC 7
8. NW STAT LOC CMP FL FH STA LTA T-ON T-OFF SERVER
9. CX PB01 .. BHZ 2.0 8.0 2.0 100.0 3.5 1.5 S01
10. -----
11. RECORD IPOC
12. NW STAT LOC CMP SERVER
13. CX PB01 .. BHZ S01
14. # This is a comment
15. CX PB01 .. BHN S01
16. CX PB01 .. BHE S01
17. IU LVC 00 BHZ S02
18. -----

```

- Line 1. Keyword line: must contain the word **SERVERS** only
- Line 2. User line that contains 2 text strings:  
The first string is a fixed form word naming and numbering the servers. The first letter must be 'S' and the next 2 is the numbering 01,02.....99.  
The second string is the actual SeedLink address.
- Line 3. User line that contains 2 text strings:

- The first string is a fixed form word naming and numbering the servers. The first letter must be 'S' and the next 2 is the numbering 01,02.....99.  
The second string is the actual SeedLink address.
- Line 4. Keyline. Obligatory after the server definition.
- Line 5. Keyword. Must be present.
- Line 6. Keyline. Obligatory.
- Line 7. First word is a keyword. Must be present. The second string can be used to give the network or subnet a name (not used but something must be there)  
Third string is the minimum number of triggers to record an event based on the stations defined in this section (a subnet).
- Line 8. This line is a key line. Must be present. This is a header line to explain the input for the lines in this section.
- NW : network code  
STAT : station code  
LOC : location code (no location code must be marked with '..', two dots)  
CMP : component code  
FL : low-pass filter for detection, floating point number  
FH : high-pass filter for detection, floating point number  
STA : length of STA in seconds, floating point number  
LTA : length of LTA in seconds, floating point number  
T-ON : STA/LTA level to trigger  
T-OFF : STA/LTA level to de-trigger  
SERVER : name of server from where to get the data (S01, S02....)
- Line 9. Channel definitions for the network
- Line10. Keyline. Obligatory.
- Line11. First word is a keyword. Must be present. The second string is any name to identify network.
- Line12. This line is a key line. Must be present. This is a header line to explain the input for the lines in this section.
- NW : network code  
STAT : station name  
LOC : location code (no location must be marked with '..', two dots)  
CMP : component code  
SERVER : name of server from where to get the data (S01, S02....)
- Line13. Station definitions for components to be recorded.
- Line14. A '#' in column one means that this line is a comment. It can hold whatever information. One use can be to exclude a component from triggering or recording due to noisy data.
- Line15. Station definitions for components to be recorded.
- Line16. Station definitions for components to be recorded.
- Line17. Station definitions for components to be recorded.
- Line18. Keyline. Obligatory.

Below some examples of different configurations with some comments:

### **DEMO1/rt\_config**

The example below is the configuration file for the test run.

Here we define one SeedLink server from where we can read all data from all stations defined. As only one network (one subnet) is defined we will treat the defined network as one network.

The trigger algorithm will use the components defined under the key line

NETWORK IPOC 7 as input, and the specified filters, STAs etc. will be used. Data will be read from S01 as specified under SERVER.

When we have 7 or more single-channel triggers on the components specified, the components specified under the keyword RECORD be retrieved and stored.

```

SERVERS
S01 129.177.55.30
-----
ALLSUBNETS
-----
NETWORK IPOC 7
NW STAT  LOC  CMP  FL    FH    STA  LTA    T-ON  T-OFF  SERVER
CX PB01  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB02  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB03  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB04  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB05  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB06  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB07  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB08  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB09  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB10  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB11  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB12  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB14  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB15  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PB16  ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX MNMCX ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PATCX ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
CX PSGCX ..   BHZ  2.0   8.0   2.0  100.0   3.5   1.5   S01
-----
RECORD IPOC
NW STAT  LOC  CMP  SERVER
CX PB01  ..   BHZ  S01
CX PB01  ..   BHN  S01
CX PB01  ..   BHE  S01
CX PB02  ..   BHZ  S01
CX PB02  ..   BHN  S01
CX PB02  ..   BHE  S01
CX PB03  ..   BHZ  S01
CX PB03  ..   BHN  S01
CX PB03  ..   BHE  S01
CX PB04  ..   BHZ  S01
CX PB04  ..   BHN  S01
CX PB04  ..   BHE  S01
CX PB05  ..   BHZ  S01
CX PB05  ..   BHN  S01
CX PB05  ..   BHE  S01
CX PB06  ..   BHZ  S01
CX PB06  ..   BHN  S01
CX PB06  ..   BHE  S01
CX PB07  ..   BHZ  S01
CX PB07  ..   BHN  S01
CX PB07  ..   BHE  S01
CX PB08  ..   BHZ  S01
CX PB08  ..   BHN  S01
CX PB08  ..   BHE  S01
CX PB09  ..   BHZ  S01

```

```

CX PB09 .. BHN S01
CX PB09 .. BHE S01
CX PB10 .. BHZ S01
CX PB10 .. BHN S01
CX PB10 .. BHE S01
CX PB11 .. BHZ S01
CX PB11 .. BHN S01
CX PB11 .. BHE S01
CX PB12 .. BHZ S01
CX PB12 .. BHN S01
CX PB12 .. BHE S01
CX PB14 .. BHZ S01
CX PB14 .. BHN S01
CX PB14 .. BHE S01
CX PB15 .. BHZ S01
CX PB15 .. BHN S01
CX PB15 .. BHE S01
CX PB16 .. BHZ S01
CX PB16 .. BHN S01
CX PB16 .. BHE S01
CX MNMCX .. BHZ S01
CX MNMCX .. BHN S01
CX MNMCX .. BHE S01
CX PATCX .. BHZ S01
CX PATCX .. BHN S01
CX PATCX .. BHE S01
CX PSGCX .. BHZ S01
CX PSGCX .. BHN S01
CX PSGCX .. BHE S01

```

---

## DEMO2/rt\_config

In the example configuration below we define 2 different SeedLink servers from where we want to read data.

Recorded events will also include data from both SeedLink servers.

The use of comments is included.

For the LVC stations different filters and trigger criteria has been included to show the use of individual parameters for each component of data.

```

SERVERS
S01 139.17.3.177 (no time window requests)
S02 rtserve.iris.washington.edu (no time window requests)
-----
ALLSUBNETS
-----
NETWORK CHILE1 6
NW STAT  LOC CMP FL    FH    STA  LTA    T-ON  T-OFF SERVER
CX PB01  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB02  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB03  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB04  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB05  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB06  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB07  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
# Next component commented out to show use of comments in file
#CX PB08  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB09  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
CX PB10  .. BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S01
# The following 3 components have different filters and triggers
IU LVC   00 BHZ 2.1   8.1   2.0   100.0  2.5   1.5   S02
IU LVC   00 BH1 2.2   8.2   2.0   100.0  3.5   1.5   S02
IU LVC   00 BH2 2.3   8.3   2.0   100.0  4.5   1.5   S02
-----
RECORD CHILE1
NW STAT  LOC CMP SERVER

```



```

CX PB01 .. BHZ S01
CX PB01 .. BHN S01
CX PB01 .. BHE S01
CX PB02 .. BHZ S01
CX PB02 .. BHN S01
CX PB02 .. BHE S01
CX PB03 .. BHZ S01
CX PB03 .. BHN S01
CX PB03 .. BHE S01
CX PB04 .. BHZ S01
CX PB04 .. BHN S01
CX PB04 .. BHE S01
CX PB05 .. BHZ S01
CX PB05 .. BHN S01
CX PB05 .. BHE S01
CX PB06 .. BHZ S01
CX PB06 .. BHN S01
CX PB06 .. BHE S01
CX PB07 .. BHZ S01
CX PB07 .. BHN S01
CX PB07 .. BHE S01
CX PB08 .. BHZ S01
CX PB08 .. BHN S01
CX PB08 .. BHE S01
CX PB09 .. BHZ S01
CX PB09 .. BHN S01
CX PB09 .. BHE S01
CX PB10 .. BHZ S01
CX PB10 .. BHN S01
CX PB10 .. BHE S01
IU LVC 00 BHZ S02
IU LVC 00 BH1 S02
IU LVC 00 BH2 S02

```

---

### DEMO3/rt\_config

In the example configuration below we define 2 different SeedLink servers from where we want to read data.

We define 2 different networks that overlap and that will trigger and record individually.

To have the configuration to treat the two networks as one, the ALLSUBNETS 0 in rtquake.par should be changed to for example ALLSUBNETS 6 where 6 is the minimum number of triggers for the whole network. The minimum number of triggers defined for each network is overridden by this parameter.

```

SERVERS
S01 rtserve.iris.washington.edu (no time window requests)
S02 139.17.3.177:18000 (no time window requests)
-----
ALLSUBNETS
-----
NETWORK CHILE1 4
NW STAT  LOC CMP FL    FH    STA  LTA    T-ON  T-OFF SERVER
IU LVC   00  BHZ 2.0   8.0   2.0  100.0  3.5   1.5   S01
IU LVC   00  BH1 2.0   8.0   2.0  100.0  3.5   1.5   S01
IU LVC   00  BH2 2.0   8.0   2.0  100.0  3.5   1.5   S01
CX PB01  ..  BHZ 2.0   8.0   2.0  100.0  3.5   1.5   S02
CX PB02  ..  BHZ 2.0   8.0   2.0  100.0  3.5   1.5   S02
CX PB03  ..  BHZ 2.0   8.0   2.0  100.0  3.5   1.5   S02
-----
RECORD CHILE1
NW STAT  LOC CMP SERVER
IU LVC   00  BHZ S01
IU LVC   00  BH1 S01

```

```

IU LVC    00  BH2  S01
-----
NETWORK CHILE2 4
NW STAT  LOC CMP FL    FH    STA    LTA    T-ON  T-OFF  SERVER
CX PB01  ..  BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S02
CX PB02  ..  BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S02
CX PB03  ..  BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S02
CX PB04  ..  BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S02
CX PB05  ..  BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S02
CX PB06  ..  BHZ 2.0   8.0   2.0   100.0  3.5   1.5   S02
-----
RECORD CHILE2
NW STAT  LOC CMP  SERVER
CX PB01  ..  BHZ  S02
CX PB01  ..  BHN  S02
CX PB01  ..  BHE  S02
CX PB02  ..  BHZ  S02
CX PB02  ..  BHN  S02
CX PB02  ..  BHE  S02
CX PB03  ..  BHZ  S02
CX PB03  ..  BHN  S02
CX PB03  ..  BHE  S02
CX PB04  ..  BHZ  S02
CX PB04  ..  BHN  S02
CX PB04  ..  BHE  S02
CX PB05  ..  BHZ  S02
CX PB05  ..  BHN  S02
CX PB05  ..  BHE  S02
CX PB06  ..  BHZ  S02
CX PB06  ..  BHN  S02
CX PB06  ..  BHE  S02
IU LVC    00  BHZ  S01
IU LVC    00  BH1  S01
IU LVC    00  BH2  S01
-----

```

## 5.4 Extracting data from SeedLink servers

In the `rt_config` file the user can specify input from several SeedLink servers like in the example above. Before starting RTQUAKE, the user must ensure that the specified SeedLink servers allow both reading real-time data and also allow extracting data from the SeedLink archives. Some SeedLink servers are behind firewalls or the configuration is set to reading data "not allowed" and extraction of data is "not allowed". If the SeedLink server only allows reading real-time data, one solution to extract data is to install a local SeedLink server to read data from the external SeedLink servers and then configure your local SeedLink server to allow reading and extracting data. This is also more practical solution if you are reading from several SeedLink servers. The user does not have to install the complete Seiscomp3 system. The previous version, Seiscomp 2.5 includes a Seedlink server that is simpler to configure and that can do this job. This SeedLink server is identical or very similar to the one in Seiscomp3. If you have access to a Seiscomp3 with all the stations you want to use in a parallel RTQUAKE system, RTQUAKE can be configured to read and extract data from this system.

## 5.5 Configuration files for continuous plot

The RTNET module plots selected components from seismic stations in near-real time. RTNET needs 2 parameter files, one for defining the input streams of data and another to define the actual components to plot. The names for these files are `streams_plot` and `stations_plot` respectively and are stored in `/home/seismo/mydir/DEMO1`. The two files

include the same streams and stations that were configured in the /home/seismo/mydir/DEMO1/rt\_config file.

### **streams\_plot**

Each line is in standard SeedLink format, but each station component and location must be included.

First 13 characters must be formatted as follows:

**NN** Network name  
- Space  
**SSSSS** Station name 5 characters  
**LL** Location 2 characters  
**CCC** Component 3 characters

#### **NN-SSSSLLCCC**

CX PB01 BHZ  
CX PB02 BHZ  
CX PB03 BHZ  
CX PB04 BHZ  
CX PB05 BHZ  
CX PB06 BHZ  
CX PB07 BHZ  
CX PB08 BHZ  
CX PB09 BHZ  
CX PB10 BHZ  
CX PB11 BHZ  
CX PB12 BHZ  
CX PB14 BHZ  
CX PB15 BHZ  
CX PB16 BHZ  
CX MNMCX BHZ  
CX PATCX BHZ  
CX PSGCX BHZ

### **stations\_plot**

First 10 characters must be formatted as follows:

**SSSSS** Station name 5 characters  
**LL** Location 2 characters  
**CCC** Component 3 characters

#### **SSSSSLLCCC**

PB01 BHZ PB01 Huatacondo  
PB02 BHZ PB02 Salar Grande  
PB03 BHZ PB03 El Tigre  
PB04 BHZ PB04 Mantos de la Luna  
PB05 BHZ PB05 Michilla  
PB06 BHZ PB06 Pedro de Valdivia  
PB07 BHZ PB07 Cerro Tatas  
PB08 BHZ PB08 Macaya  
PB09 BHZ PB09 Quillagua  
PB10 BHZ PB10 Juan Lopez  
PB11 BHZ PB11 Quebrada Aricilda

```

PB12    BHZ PB12 Cerro Caramaca
PB14    BHZ PB14 Cerro Paranal
PB15    BHZ PB15 Sierra Gorda
PB16    BHZ PB16 Cerro Chaquipina
MNMCMX  BHZ MNMCMX Minimi
PATCX   BHZ PATCX Patache
PSGCX   BHZ PSGCX Pisagua

```

## 5.6 Configuration file for continuous plot from multiple SeedLink servers

The RTSLPL module plots selected components from seismic stations in near-real time. The module is basically the same as the RTNET, but have much less options. The main advantage is that it can read input data from multiple SeedLink servers. See parameter file example below:

```

SERVERS
S01 139.17.3.177
S02 rtserve.iris.washington.edu
-----
NW STAT LOC CMP SERVER
CX PB01 .. BHZ S01
CX PB02 .. BHZ S01
CX PB03 .. BHZ S01
CX PB04 .. BHZ S01
CX PB05 .. BHZ S01
CX PB06 .. BHZ S01
CX PB10 .. BHZ S01
IU LVC 00 BHZ S02
IU LVC 00 BH1 S02
IU LVC 00 BH2 S02
-----

```

The parameter file must follow the format shown above. The keyword SERVERS must be present and also the two dashed lines. The line NW STAT LOC CMP SERVER must also be present. It is used as a format indicator for:

NW	Network name
STAT	Station name
LOC	Location
CMP	Component name
SERVER	Server id (S01, S02 etc.)

In the example above stations from 2 SeedLink servers are plotted.

## 5.7 Configuration files for helicorder plots

The three modules RT24, RTDR24 and RTDRUM are used to create helicorder plots of unfiltered and filtered data from streams from a SeedLink server. Two parameter files are used as input, one to define the different streams to read and another to select the actual components to plot. See Chapter 20.

<b>streams_heli</b>	This file is in standard SeedLink format and lists the stations and components that will be read from the SeedLink server for plotting. Stored in /mydir/par/DEMO1.
---------------------	---

```

CX PB01 BHZ
CX PB02 BHZ
CX PB03 BHZ
CX PB04 BHZ
CX PB05 BHZ
CX PB06 BHZ
CX PB07 BHZ
CX PB08 BHZ
CX PB09 BHZ
CX PB10 BHZ
CX PB11 BHZ
CX PB12 BHZ

```

## stations\_heli

This file specifies the components that will be generated as helicorder plots. The content is station, location, component, amplification factor for unfiltered data, amplification factor for filtered data, low-pass frequency, high-pass frequency and the name to appear on the helicorder plot.

The amplification factors can be modified dynamically when the system is running. This way the helicorder plot can be checked for reasonable amplitudes on the plot.

First 10 characters must be formatted as follows:

```

SSSSS Station name 5 characters
LL      Location 2 characters
CCC     Component 3 characters
AMP1      Amplification factor raw data
AMP2      Amplification factor filtered data
FL        Low pass filter
FH        High pass filter

```

<b>SSSSSLLCCC</b>		<b>AMP1</b>	<b>AMP2</b>	<b>FL</b>	<b>FH</b>	<b>NAME</b>
PB01	BHZ	0.0100	0.0300	2.0	8.0	Huatacondo
PB02	BHZ	0.0100	0.0300	2.0	8.0	Salar Grande
PB03	BHZ	0.0100	0.0300	2.0	8.0	El Tigre
PB04	BHZ	0.0100	0.0300	2.0	8.0	Mantos de la Luna
PB05	BHZ	0.0100	0.0300	2.0	8.0	Michilla
PB06	BHZ	0.0100	0.0300	2.0	8.0	Pedro de Valdivia
PB07	BHZ	0.0100	0.0300	2.0	8.0	Cerro Tatas
PB08	BHZ	0.0100	0.0300	2.0	8.0	Macaya
PB09	BHZ	0.0100	0.0300	2.0	8.0	Quillagua
PB10	BHZ	0.0100	0.0300	2.0	8.0	Juan Lopez
PB11	BHZ	0.0100	0.0300	2.0	8.0	Quebrada Aricilda
PB12	BHZ	0.0100	0.0300	2.0	8.0	Cerro-Caramaca

## 5.8 Parameterfile web-pages

Two web pages are available to monitor the events recorded and located by RTQUAKE. Both html files, LAST\_TRIG.html and AUTLOLOC\_MON.html, are stored in /home/seismo/mydir/rtq\_web/map and use the same parameter file that are also located in /home/seismo/mydir/rtq\_web/map. The parameter file is called: map.par

```

NUMBER OF EVENTS          # Number of events back in time to plot
100
ZOOM FACTOR               # Google maps zoom factor
7
LATITUDE-LONGITUDE-GRID  # Add latitude/longitude grid (1) or not (0)
0
MAPTYPE 0-SAT,1-TER       # Maptype id Google maps: 0-SATELITE, 1-TERRAIN
0
BLINK                     # Blinking red marker, 0-blinking, 1-no blinking
0

```

## 5.9 Aliases and Scripts

**alias rtstart='\$RTQUAKE\_TOP/com/rtquake\_start'**

The command `rtstart` starts the script `rtquake_start`. This is the start script to start RTQUAKE and the file actually installed is set up for the test run and can be used as a recipe for the user to set up the actual network. As you see in the example below, the DEMO1 subdirectory is used.

```

killall rtdet
killall rtdly
killall rtnet
$RTQUAKE_TOP/bin/rtdet -par 0 -cfg DEMO1 &
sleep 2
$RTQUAKE_TOP/bin/rtdly &
sleep 2
$RTQUAKE_TOP/bin/rtnet -x 650 -y 750 -xo 150 -yo 150 -d -m 10 -n 20 -fl 2.0
-fh 8.0 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000 &

```

First any active RTQUAKE modules are stopped, then the `rtdet` module is started with the configuration given in DEMO1, then the `rtdly` module is started and finally the `rtnet` module is started. See module descriptions for more details on the parameters for each module.

**Important:** The ip number in the start command for the `rtnet` module must be changed to fit your configuration. Other `rtnet` arguments may also be modified to fit number of channels, filters etc.

**alias rtstop='\$RTQUAKE\_TOP/com/rtquake\_stop'**

Activate the `rtquake_stop` script.

The command `rtstop` stops all running RTQUAKE modules.

```

killall rtdet
killall rtsnr
killall rtmon
killall rtnet
killall rtdly
killall rt24
killall rtdrum
killall rtdr24

```

**alias rtheli1='\$RTQUAKE\_TOP/com/rtquake\_heli\_tst1'**

The command `rtheli1` starts the generation of the helicorder plots, one plot per day.

```
rt24 -heli 1 -logol logo_left_def.gif -logor logo_right_def.jpg -col 5 -to_wi 1200 -fr_hg 600 -mt 15 -l  
DEMO1/streams_heli -f DEMO1/stations_heli 139.17.3.177
```

See module descriptions for more details on the parameters for each module.

```
alias rtheli2='$RTQUAKE_TOP/com/rtquake_heli_tst2'
```

The command rtheli2 starts the generation of helicorder plots always showing the last 24 hours.

```
rt24 -heli 0 -logol logo_left_def.gif -logor logo_right_def.jpg -col 0 -to_wi 1200 -fr_hg 600 -mt 15 -l  
DEMO1/streams_heli -f DEMO1/stations_heli 139.17.3.177
```

See module descriptions for more details on the parameters for each module.

## 6 START SCRIPT TEST RUN

When starting the main modules in RTQUAKE with the start script, several parameters are given in the script. Below is the example script `rtquake_start` with explanation of the parameters used.

```
killall rtdet
killall rtdly
killall rtnet
echo Start profile: $1
$RTQUAKE_TOP/bin/rtdet -cfg $1 &
sleep 5
$RTQUAKE_TOP/bin/rtnet -x 650 -y 700 -xo 50 -yo 300 -d -m 10 -n 20 -fl 2.0 -fh 8.0 -l
$1/streams_plot -f $1/stations_plot 139.17.3.177:18000 &
sleep 5
$RTQUAKE_TOP/bin/rtdly &
```

Explanation of the parameters used in the `rtquake_start`:

`rtdet` is the acquisition and detection module. The different parameters have the following meaning:

`-cfg` argument                      Name of profile catalog under: `/home/mydir/rtquake/par` that contains the configuration files (DEMO1).

`rtdly` is graphically monitoring the components that are defined in the configuration file for triggers and the durations of the triggers.

`rtnet` plots continuous data of specified components. The module takes the following parameters:

<code>-x 650</code>	x size of plot frame in pixels
<code>-y 700</code>	y size of plot frame in pixels
<code>-xo 50</code>	x position of upper left corner of plot frame.
<code>-yo 300</code>	y position of upper left corner of plot frame.
<code>-d</code>	Plot geographical name instead of station name as specified in the <code>stations_plot</code> file, see 4.5.
<code>-m 10</code>	Number of minutes on screen
<code>-fl 2.0</code>	Specifies lower frequency in band pass filter
<code>-fh 8.0</code>	Specifies higher frequency in band pass filter
<code>-l DEMO1/streams_plot</code>	Streams or components to read from SeedLink server
<code>-f DEMO1/stations_plot</code>	Stations to plot
<code>-n 20</code>	Number of stations to plot
<code>139.17.3.177:18000</code>	IP address and port number for the SeedLink server.

**Be aware that the IP number in the example is ONLY valid for the example configuration.**



## 7 CONFIGURATION OF A NEW NETWORK

To configure your own network, first create a new sub-catalogue under the /mydir/par catalogue that identifies your network. You can use the parameter files used in the test example as a recipe. Make a copy the files rt\_config, streams\_plot and stations\_plot in the par/DEMO1. Edit the files to fit your stations, components etc. Check the rtquake.par file. As a start most default values can be used. Remember to include your station coordinates (if auto locations are to be made) in the SEISAN STATION0.HYP file if not already there in your SEISAN installation. Remember to include the response files in the SEISAN CAL catalogue if local magnitude is to be calculated. The start script should also be modified to fit your configuration.

### Automatic start of RTQUAKE with a cron job

RTQUAKE can be set up to start automatically when the computer starts up. Modules may also stop due to different reasons and should then be restarted. A cron job can do this by checking that a specific module is active at regular time intervals.

```
cron_restart.csh

#!/bin/csh
#
set PROCESS='rtdet'

set val = `ps -e | grep rtdet | sed -e "s/.*\(rtdet[^\ ]*\).*/\1/"`

if($val != "") then
    echo "RTDET running, EXIT"
    exit
else
    echo "$PROCESS is not running"
    echo "start the process"
    echo "Start $PROCESS !"
    #echo "put in the start command here"
    /home/seismo/mydir/com/start_rtdet.csh > /dev/null &
    echo "$PROCESS started"
endif
```

A crontab job to restart the rtdet module can be created by starting the script above for example every 5 minutes:

```
* /5 * * * * /home/seismo/rtquake/com/cron_restart.csh
```

Both scripts cron\_restart.csh and start\_rtdet must be changed to “executable” to function. A typical start\_rtdet.csh would look like:

```
#!/bin/csh
source /home/seismo/rtquake/com/setup_rt.csh
source /home/seismo/COM/.SEISAN
cd /home/seismo/rtquake/wrk
/home/seismo/rtquake/bin/rtdet -cfg DEMO1&
```

**NOTE:** Be aware that the name of the cron script can NOT contain the name of the module you want to restart. cron\_restart.csh is ok, restart\_rtdet.csh is NOT ok if you want to restart the module rtdet.

For the bash shell the cron script will look like this:

```
cron_restart.bash
```

```
#!/bin/bash
#
PROCESS='rtdet'
if ps ax | grep -v grep | grep $PROCESS > /dev/null
then
exit
else
#echo "$PROCESS is not running"
#start the process
#echo "Start $PROCESS !"
#echo "put in the start command here"
#/home/seismo/rtquake/par/STARTUP-SCRIPT-FOR-RTDET > /dev/null &
/home/seismo/mydir/par/start_rtdet > /dev/null &
fi
```

```
*/5 * * * * /home/seismo/mydir/com/cron_restart.bash
```

```
#!/bin/bash
source /home/seismo/mydir/com/setup_rt.bash
source /home/seismo/seismo/COM/SEISAN.bash
/home/seismo/mydir/bin/rtdet -par 0 -cfg DEMO1&
```

## 8 DIRECTORY STRUCTURE

If we assume a top directory: /home/seismo, the following directory structure will be created:

/home/seismo/mydir	Main directory containing all subdirectories, include files, makefile
/home/seismo/mydir/bin	Executables
/home/seismo/mydir/com	Environment scripts and test scripts
/home/seismo/mydir/doc	All documentation in word or pdf format.
/home/seismo/mydir/rtq_web/heli	Example configuration, scripts etc for helicorder plots
/home/seismo/mydir/inc	Include files for RTQUAKE
/home/seismo/mydir/libslink	Libraries and include files for SeedLink library.
/home/seismo/mydir/rtq_web/loc	Static Google map links for plotting automatic locations
/home/seismo/mydir/rtq_web/map	Temporary hypocenter files for generating maps, station files
/home/seismo/mydir/par	Parameter files for the different modules
/home/seismo/mydir/par/DEMO1	Test configuration (Test run example)
/home/seismo/mydir/par/DEMO2	Demo configuration (Example)
/home/seismo/mydir/par/DEMO3	Demo configuration (Example)
/home/seismo/mydir/picker	Source files Filter-picker, include files and make file
/home/seismo/mydir/req	Request files. One file for each triggered event. The files are executable and can be run to extract the event file if it for some reason was not recorded at trigger time, for example: delayed data. Depending on the size of the segment buffer in the SeedLink server, this can be done several days after the time of the trigger.
/home/seismo/mydir/rtq_web/cod	Catalog for automatically generated png and html files used by web page: /home/seismo/mydir/map/AUTOLOC.html.
/home/seismo/mydir/rt/latency	Catalog for for data delays of arriving SeedLink data used in RTTIME module.
/home/seismo/mydir/rtq_web/png	Catalog for unfiltered helicorder plots
/home/seismo/mydir/rtq_web/png_filt	Catalog for filtered helicorder plots
/home/seismo/mydir/rtq_web/pph	Catalog for automatically generated png and html files used by web page: /home/seismo/mydir/map/AUTOLOC_RT.html
/home/seismo/mydir/rtq_web/tmp	Catalog for unfiltered datafiles to make helicorder plots
/home/seismo/mydir/rtq_web/tmp_filt	Catalog for filtered datafiles to make helicorder plots
/home/seismo/mydir/rt/tmp0-10	Catalogs for execution of 10 parallell rtpick programs for 10 different subnets.
/home/seismo/mydir/rtdet	Source files and make file for main module
/home/seismo/mydir/seedlink	Distribution and user manual SeedLink
/home/seismo/mydir/tmp	Temporary files. Removed after x days specified in the /home/seismo/mydir/com/rtquake.par file.
/home/seismo/mydir/utlis	Source files main monitoring utilities, makefile,
/home/seismo/mydir/wrk	Work catalogue for testing of software

## 9 GENERAL DESCRIPTION AND MODULE OVERVIEW

In general the modules are dependent on data recorded by a SeedLink server. The server can be located locally or remotely as long as you as the user have access to the server through internet. Some modules are written as clients to the SeedLink server to extract data in near real time while others are used to monitor this activity. Another group of modules monitor the activity on the SeedLink server.

The modules can be categorized into 3 different groups

### ● **Detection, Recording and Monitoring**

**RTDET** Detection and recording of events. Reads data from local or remote SeedLink server.

**AUTOPHASE** Automatic phase-picking and auto-location. Both work close to realtime and after a complete events has been recorded.

**RTDLY** Monitor onsets of triggers and duration of triggers for the individual components specified in the detection parameter file.

### ● **Monitoring of SeedLink**

**RTNET** Plots selected components in “near-real-time”. Reads data from a local or remote SeedLink server. Independent of RTQUAKE.

**RTTIME** Graphic monitoring of latency of stations transmitting to a SeedLink server. Independent of RTQUAKE. Connect to specified SeedLink server.

### ● **Helicorder plots** (independant of RTQUAKE, connects to SeedLink server)

**RT24** Generates temporary data files of specified station components. Files are input for RTDR24 that generates helicorder plots. Data are read from local or remote SeedLink server.

**RTDRUM** Creates helicorder plots of specified station components. One-day.

**RTDR24** Creates helicorder plots of specified station components. Last 24 hour.

**RTHPLT** Creates a menu to plot individual helicorder plots. Two individual html files are generated for raw and filtered data respectively. The routine also removes files older than x days where x is given as a parameter for the routine.

## 10 DETECTION AND RECORDING OF EVENTS

### **RTDET – Detection based on input data from a SeedLink server.**

RTDET is written as a SeedLink client, and executes under Linux. The program can be run on the same machine as the SeedLink server or remotely.

A SeedLink server will normally hold data from a network covering a larger geographical area. By using different parameter sets, it is possible to divide the network into several sub-nets for detection of more local events.

Each parameter set can have different parameters such as:

- different and/or overlapping stations with other parameter sets
- different filters
- different trigger-ratio
- different de-trigger-ratio
- different sta & lta length
- different parameter sets can record different components.

All parameters for the rtdet module are defined in the mydir/com/rtquake.par file and in the parameter file where stations and networks are defined, mydir/par/yournetwork/rt\_config.

### **Description of the trigger algorithm.**

Data buffers from stations specified in the parameter files are read from the SeedLink server. Data from each component are stored in a two-dimensional array, (component, and sample). New data are stored in the bottom of the array, while old data are shifted out from the top. Each component is continuously checked for triggers with a standard STA/LTA computation. A 3-dimensional array (parameter set, channel-number, length in seconds) can hold trigger-times for up to one hour. Trigger times for individual components are stored in this array in the correct place with reference to current UTC time. The array is shifted at regular intervals so that the array always keeps new data at the current UTC time. Network detection is then computed at a later time, controlled by parameters in the rtquake.par file, see 5.2. Figure 4.2 illustrates this in more detail.

Triggers will exist as valid until they are shifted out of the array-propagation-window, also explained in Figure 4.2.

When subnets are defined, each subnet will have its own trigger-thread independent of the others.

The trigger algorithm allows triggers to be detected with a delay in time. This means that for example data from one or more stations arrive with a variable delay due to for example communication problems, can be used to correctly trigger an event.


# 11 AUTOMATIC LOCATION

## 11.1 Automatic location on complete recorded events.

To activate the automatic location in RTQUAKE, several parameters have to be set to correct values in the rtquake.par file, see 5.2. The parameters KEEP and LOCATION must both be set to 1 as explained in 5.2. This will ensure that an s-file will be created with phase-picks from the rtpick module. LOCATION=1 means that location of the event will be initiated. ITERATION, MAX\_RESIDUAL and MINSTALOC are used in the iteration process to reduce the number of phases in the s-file that have high residuals. ITERATION=200 means that the program will try with up to 200 iterations to reduce the average residual to MAX\_RESIDUAL=2.5. MINSTALOC=5 means that the program will need minimum 5 stations left to do location when the MAX\_RESIDUAL=2.5 has been reached. See 5.2 rtquake.par.

**For SEISAN the parameter “RMS residual low limit for bisquare weighting for local events” (RESET TEST(36) ) should be set to e.g. 6 s in the STATION0.HYP file.** This means that when the RMS of travel time residuals is less than 6 s, residual weighting will start to be used and large outliers will have little or no influence in the location.

The automatic location procedure in RTQUAKE is outlined in the flowchart below:

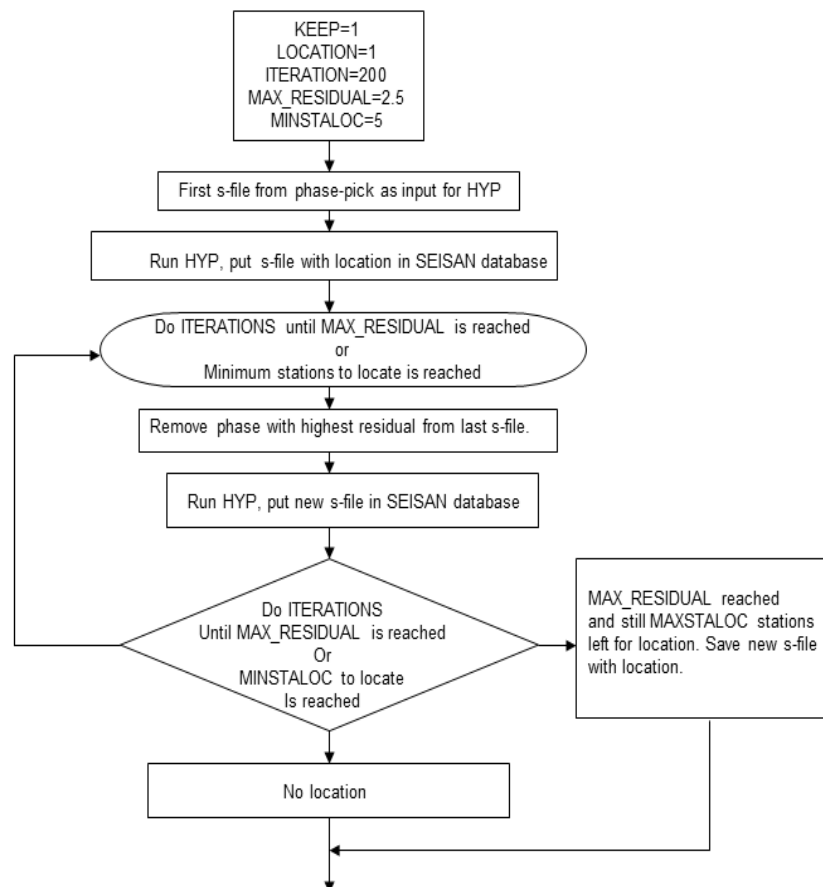

**Figure 11.1** Automatic location process

Below is an example output from the iteration process. In the example the MAX\_RESIDUAL is set to 2.5 and the MAXSTALOC to 5 stations. In bold one can see that the average residual is decreasing for each iteration until the 2.5 limit has been reached and there are still 25 stations left for location.

MAX\_RESIDUAL 2.5

```

RTPICK: Path+s-filename.....: /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405
RTPICK: S_REC: fullpath.....: /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405
RTPICK: S_REC.....: Write new s-file header to s-file.
RTPICK: S_REC: Create s-file.....: /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405
S_REC: Write new phases to s-file.
PB01 BZ IP A 8 5 57.36 270
PB02 BZ IP A 8 5 57.31 277
PB04 BZ IP A 8 6 8.36 223
PB05 BZ IP A 8 6 14.86 263
PB06 BZ IP A 8 6 15.86 240
PB07 BZ IP A 8 6 2.46 274
PB08 BZ IP A 8 5 53.86 275
PB09 BZ IP A 8 6 8.50 269
PB10 BZ IP A 8 6 22.54 233
PB11 BZ IP A 8 5 44.85 309
PB12 BZ IP A 8 5 38.55 254
PB15 BZ IP A 8 6 22.86 129
PB16 BZ IP A 8 5 50.94 293
MNM CXBZ IP A 8 5 45.20 318
PATCXBZ IP A 8 5 49.60 211
PSGCXBZ IP A 8 5 37.20 322
PB01 BN IS 3A 8 6 24.31
PB08 BN IS 3A 8 6 21.46
PB08 BE IS 3A 8 5 54.81
PB09 BN IS 3A 8 6 9.30
PB11 BN IS 3A 8 6 3. 0
PB11 BE IS 3A 8 6 3. 5
PB12 BN IS 3A 8 5 50.89
PB12 BE IS 3A 8 5 51. 9
PB16 BN IS 3A 8 6 13. 9
PB16 BE IS 3A 8 6 13.79
MNM CXBN IS 3A 8 6 5.25
MNM CXBE IS 3A 8 6 4. 0
PATCXBN IS 3A 8 5 50.30
PSGCXBN IS 3A 8 5 51. 0
PSGCXBE IS 3A 8 5 50.80
AUTOPHASE: Create_sfile...: Locate + new s-file.
AUTOPHASE: comm0.....: rm hyptemp.txt
AUTOPHASE: com10.....: cp /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405 s_org.out
AUTOPHASE: comm1.....: hyp /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405 >>
hyptemp.txt
AUTOPHASE: comm2.....: cp hyp.out /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405
AUTOPHASE: comm8.....: cp hyp.out hyp_all.out
AUTOPHASE: Found.....: hyp.out
AUTOPHASE: readings left...: 31 Avg.res: 34.00 phases left: 30 Avg.residual in HYP_NEW:
27.53
AUTOPHASE: readings left...: 30 Avg.res: 27.40 phases left: 29 Avg.residual in HYP_NEW:
21.34
AUTOPHASE: readings left...: 29 Avg.res: 21.34 phases left: 28 Avg.residual in
AUTOPHASEHYP_NEW: 16.28
AUTOPHASE: readings left...: 28 Avg.res: 16.28 phases left: 27 Avg.residual in HYP_NEW:
10.85
AUTOPHASE: readings left...: 27 Avg.res: 10.85 phases left: 26 Avg.residual in HYP_NEW:
6.85
AUTOPHASE: readings left...: 26 Avg.res: 6.85 phases left: 25 Avg.residual in HYP_NEW:
2.68
AUTOPHASE: readings left...: 25 Avg.res: 2.68 phases left: 24 Avg.residual in HYP_NEW:
1.41
AUTOPHASE: STOP iterations. Residual below...: 2.50
AUTOPHASE: Average residual.....: 2.679000
AUTOPHASE: No more iterations.....: Number of stations: 25 Avg: res.: 2.679
AUTOPHASE: comm6.....: cp hyp.out hyp.tmp
AUTOPHASE: com11.....: cp hyp.out /home/seismo/rtquake/map
AUTOPHASE: comm2.....: cp hyp.out /home/seismo/snew/REA/TST_/2014/05/05-0805-
20L.S201405

```

```

AUTOPHASE: SEISAN_TOP.....: /home/seismo/snew
AUTOPHASE: RTQUAKE_TOP.....: /home/seismo/rtquake
AUTOPHASE: RSS.....: 2679
RAUTOPHAS:.....: Update map
AUTOPHASE: MAG.....: 3.4
AUTOPHASE: mail1.....: 0
rtn>

```

Below is the final s-file after the iteration and location process:

```

rtn>eev 201405050805
  2014  5 5 Reading events from base TST__ 732
# 731  5 May 2014 08:05 19 LM-19.318 -71.135  0.3  N 0.6 3.4CBER  16  ? t

  File name: /home/seismo/snew/REA/TST_/2014/05/05-0805-20L.S201405
2014  5 5 0805 19.7 LM-19.318 -71.135  0.3  BER 16 0.6 3.4CBER 1
GAP=235 1.10 5.4 9.2 8.6 -0.2931E+02 0.1503E+02 0.1272E+02E
2014-05-05-0804-20.TST__054_00 6
ACTION:NEW 14-05-05 08:05 OP:SEIS STATUS: ID:20140505080519 I
STAT SP IPHASW D HRMM SECON CODA AMPLIT PERI AZIMU VELO SNR AR TRES W DIS CAZ7
PSGCXBZ IP A 8 5 37.20 322 91 -0.3210 111 106
PSGCXBE IS 3A 8 5 50.80 91 0.08 2 111 106
PB12 BZ IP A 8 5 38.55 254 91 0.2810 115 48
PB12 BN IS 3A 8 5 50.89 91 -1.15 2 115 48
MNM CXBE IS 3A 8 6 4. 0 50 -0.78 2 163 83
PB11 BZ IP A 8 5 44.85 309 50 -0.5910 163 108
PB11 BN IS 3A 8 6 3. 0 50 -1.51 2 163 108
MNM CXBZ IP A 8 5 45.20 318 50 -0.3910 163 83
PATCXBZ IP A 8 5 49.60 211 50 0.1410 195 148
PATC XBN IS 3A 8 5 50.30 50 -21.2 0 195 148
PB16 BZ IP A 8 5 50.94 293 50 0.1610 203 58
PB16 BE IS 3A 8 6 13.79 50 -0.01 3 203 58
PB08 BZ IP A 8 5 53.86 275 50 0.2910 227 114
PB08 BN IS 3A 8 6 21.46 50 2.80 2 227 114
PB02 BZ IP A 8 5 57.31 277 50 0.2510 257 150


  Return to continue, q to return to EEV

PB01 BZ IP A 8 5 57.36 270 50 0.2410 257 138
PB01 BN IS 3A 8 6 24.31 50 -0.52 2 257 138
PB07 BZ IP A 8 6 2.46 274 50 0.3510 297 154
PB09 BZ IP A 8 6 8.50 269 50 1.27 9 338 145
PB09 BN IS 3A 8 6 9.30 50 -33.1 0 338 145
PB04 BZ IP A 8 6 8.36 223 50 -0.2710 349 163
PB05 BZ IP A 8 6 14.86 263 50 -0.4310 403 166
PB06 BZ IP A 8 6 15.86 240 50 -0.1510 409 157
PB15 BZ IP A 8 6 22.86 129 49 0.0410 464 158
PB10 BZ IP A 8 6 22.54 233 49 -0.6410 468 173

```

The web page below (see Chapter 4) shows the map with the location, the s-file, a plot of the residuals each component and a plot of the waveform of the event.



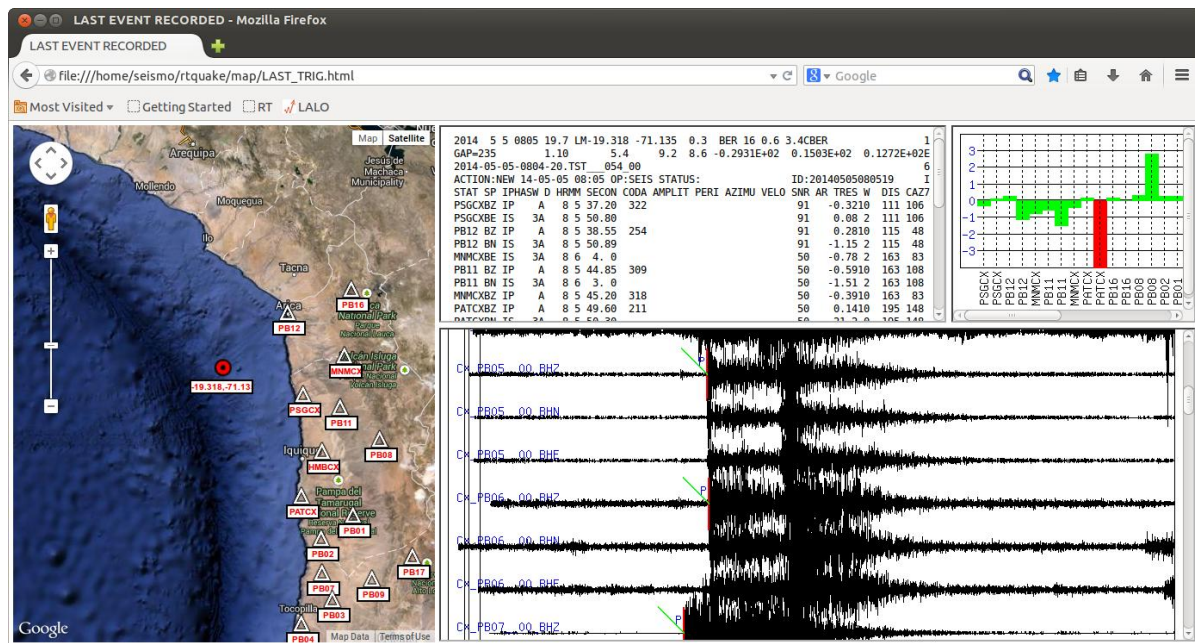

**Figure 11.2** Web page showing location of last located event.


## 11.2 Automatic location in "close-to-real-time".

Close to real time location can be performed by the RTDET program if the parameter `REALTIME_PICK` is set to 1 in the `rtquake.par` parameter file. With this option active the system will try to do an automatic location based on phase-picks done in a small time window close to real time. This time-window works as an array-propagation window, but the time window is situated in time immediately after the time that the data enter the system from the SeedLink server. When a sufficient minimum number of phases are available, the system will try to do a location. The location may be rejected due to high rms residual or due to few phases. As more data enters the time-window, the location may succeed, and can also be improved as more data enter with new phases.

Short waveforms with corresponding s-files are stored in the SEISAN data base under `/WAV/PPHAS` and `/REA/PPHAS`.

The  $M_L$  and  $M_w$  can also be computed if the response files for the actual stations are installed in SEISAN.

Locations and magnitudes can be monitored on the web-page `mydir/rtq_web/map/AUTOLOC_MON.html`, `mydir/map/AUTOLOC_RT.html` and the program `rtloc` as described in Figures 4.6, 4.7 and 4.9.

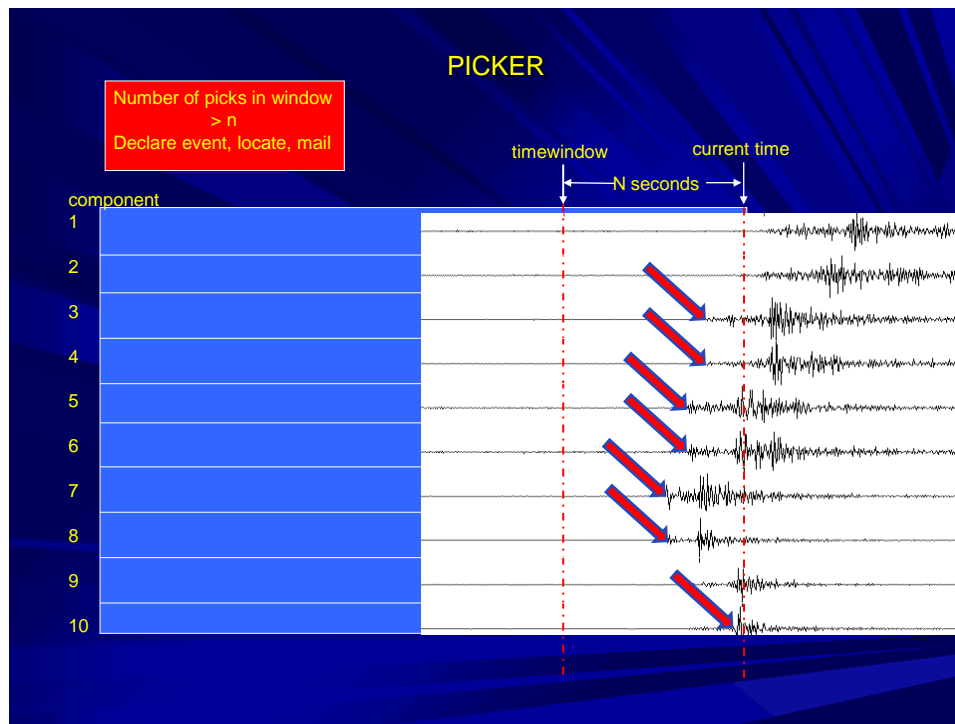

**Figure 11.3** Automatic location based on "close-to-real-time" phases.

## 12 PROCESSING DETECTIONS WITH SEISAN

SEISAN is intended to be used as the main data-inspection and processing system since the triggered events are written directly out in a SEISAN data base and, if SEISAN is mounted on the same computer as the SeisComp system, SEISAN can also read the SeisComp ring buffer system.

### SEISAN trigger files

For each trigger, an S-file is created in the SEISAN data base with P and S-arrival times, signal duration as well as a reference to the trigger waveform file, see example below. The S-files can be used for SEISAN processing like earthquake location and plotting.

#### Checking triggered events

Events that have triggered the system can be found by using the command `eev`. E.g. the command `'eev 200905'` is used to inspect data for May 2009. This command can be given from any directory. Alternatively, SeisanExplorer can be used.

#### Plotting triggered events

From `eev`, give command `po` and the MULPLT program is started with the current event. The user can now do housekeeping by inspecting events, delete false triggers, and do final registration of the event into the SEISAN-database.

### Plotting data with a SeisComp ringbuffer database (the archive)

In SEISAN, `'mulplt'` is able to plot from the SeisComp ringbufferes (archive), so that any time-window, from any number of channels, can be seen at the same time. The ringbuffer consists of a flat file system with one channel files one day long (see SeisComp manual).

The channels to be plotted and the location of the archive must have been defined in the SEISAN.DEF file in DAT (see SEISAN manual). The procedure is then:

Start `'mulplt'`.

Give option `'arc'`

Select start time and interval, the plot will then come up in the usual way with all selected channels. It is now possible to move forwards and backwards in the ring buffer.

It is possible to plot and extract out data from the ringbuffer a couple of minutes after real time.

### Extracting data from the archive using `'mulplt'`:

Use `'Out'` function to extract data selected on the screen or use `'Regis'` function to extract a waveform file to the WAV directory and create a corresponding new event (S-file) in the data base. This option can be used to recover data if RTDET did not trigger or trigger interval was not correct

## The S-file

An example of a name is:

12-1145-22L.199911

The name consists of ‘day of month’ and time. The L indicates that the event is a local event by default (see SEISAN). On the left hand side is year and month. The S-files are written in ASCII and the format follows the SEISAN-definition. An example for an S-file is shown below:

```
1999  623  7 5 30.0 L                                BER                                1
1999-06-23-0705-30S.BERG__003                                6
ACTION:NEW 99-06-23 07:05 OP:SEIS STATUS:                                ID:19990623070530  I
STAT SP IPHASW D HRMM SECON CODA AMPLIT PERI AZIMU VELO SNR AR TRES W  DIS CAZ7
BER  SZ IP      A  0705 30.10  10
ASK  SZ IP      A  0705 30.10  10
EGD  SZ IP      0705 30.10  10
```

A full description of the format is found in the SEISAN-manual, so only the important points will be given here. The first line is a header line giving start-time of the recording. The L stands for local event (by default). BER is the station-identifier-code. Line 2 gives the name of the corresponding waveform-file, which normally is located in the directory for event waveform-files. Line 3 is a help line for lines following, which gives the trigger-time for each channel participating in the detection. The duration of the trigger for each channel is given under ‘CODA’. These times can be used by SEISAN for locating the event if more than 3 stations are present, and the magnitude is calculated from the coda.

## 13 MAIL

### 13.1 Optional : Mail

RTQUAKE has the ability to send mail when an event has been recorded and a preliminary automatic location has been calculated or in close to real time if the proper parameter has been set. A third option that can be used is to issue an email whenever an event has been recorded. Be aware that also false detections will cause this mail to be sent. This means that automatic location option must be activated (see 5.2 rtquake.par) and that the location is written in the S-file. Some events may not be located due to unreliable readings and no mail is sent. This option can be activated in the rtquake.par file (see 5.2 rtquake.par). Be aware that this can cause a lot of mails to be sent if the threshold for triggering is low or if noisy signals result in false triggers. A network in a very seismic area will also cause lot of mails. For RTQUAKE to support this option the user has to install the following packages: **ssmtp** and **mutt** (text-based mail client).

SSMTP is a program to deliver an email from a local computer to a configured mailhost (mailhub). It is not a mail server and does not receive mail, expand aliases or manage a queue. One of its primary uses is for forwarding automated email (like system alerts) from your machine and to an external email address.

For the setup below the user must have access to a gmail account for this purpose. It is recommended to create a separate account for these mails. We assume an account: myaccount@gmail.com with a password: mypassword for the example configuration below.

**Never use this account and password in the example above for security reasons!!!!!!**

As root, the user must edit the two ssmtp configuration files to contain the same information as shown below. In the rtquake.par file the user specify the real email address that will receive the mail. The gmail account will just forward the mail.

Edit /etc/ssmtp/ssmtp.conf:

```
#
# Config file for sSMTP sendmail
#
# The person who gets all mail for userids < 1000
# Make this empty to disable rewriting.
root=myaccount@gmail.com

# The place where the mail goes. The actual machine name is required no
# MX records are consulted. Commonly mailhosts are named mail.domain.com
mailhub=smtp.gmail.com:587

# Where will the mail seem to come from?
#rewriteDomain=

# The full hostname
hostname=smtp.gmail.com:587
UseSTARTTLS=YES
UseTLS=YES
AuthUser=myaccount
AuthPass=mypassword
AuthMethod=LOGIN
```

```
# Are users allowed to set their own From: address?
# YES - Allow the user to specify their own From: address
# NO - Use the system generated From: address
FromLineOverride=NO
```

Edit **/etc/ssmtp/revaliases:**

```
# sSMTP aliases
#
# Format:      local_account:outgoing_address:mailhub
#
# Example: root:your_login@your.domain:mailhub.your.domain[:port]
# where [:port] is an optional port number that defaults to 25.
root:myaccount@gmail.com:smtp.gmail.com:587
mainuser:myaccount@gmail.com:smtp.gmail.com:587
rtquake:myaccount@gmail.com:smtp.gmail.com:587
```

If mail has been configured and is activated in rtquake.par the email will look like this and contain the following information:

**subject:** 1COD UTC: 28/05/2015 09:55:10.1 Lat: -20.13 Lon: -70.21 MC: 3.9 Provincia de Iquique,  
I Región de Tarapacá, Chile


To: the-address specified in rtquake.par  
2 attachments:  
ALL.png  
hyp.txt

<http://maps.googleapis.com/maps/api/staticmap?center=-20.128000,-70.207001&zoom=7&size=900x1000&mapttype=hybrid&markers=icon:http://maps.google.com/mapfiles/kml/pa13/icon33.png%7C-20.128000,-70.207001&sensor=false>


In the subject: 1COD, the ‘1’ is indicating which subnet that triggered the recording, and COD indicate that the auto location was based on the complete recording of the event. This indicator can also be PPH which means that the auto location was based on close to real-time P phase readings

Clicking on the link will produce a static google map as shown in Figure 13.1. The text “center=-20.128000,-70.207001” is the computed location for the event. The attachment ALL.png contains the plot shown in Figure 13.2 and hyp.txt (s-file) in Figure 13.3



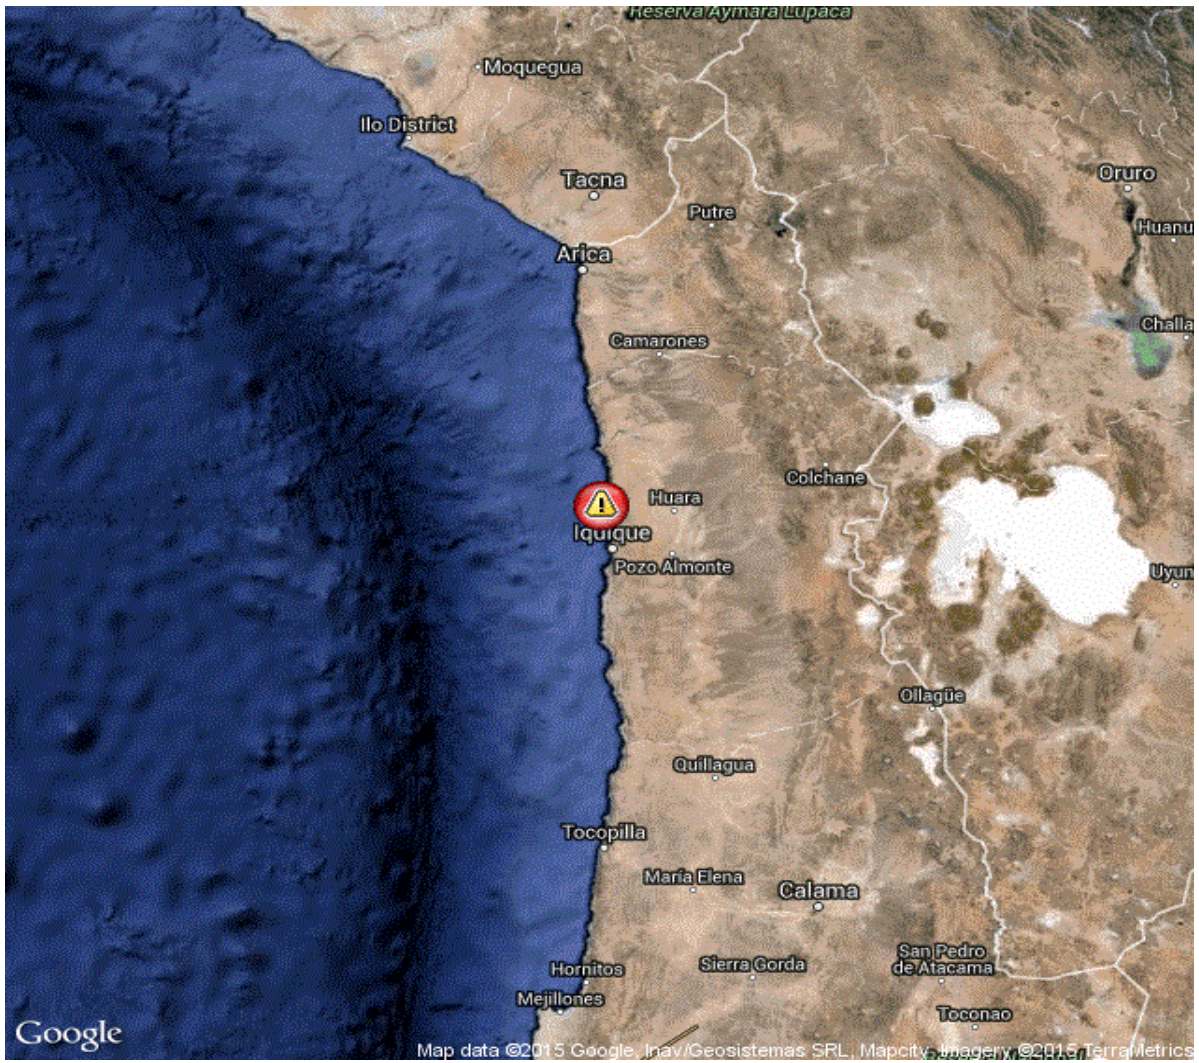

**Figure 13.1** Static google map with suggested location marked with the red symbol.

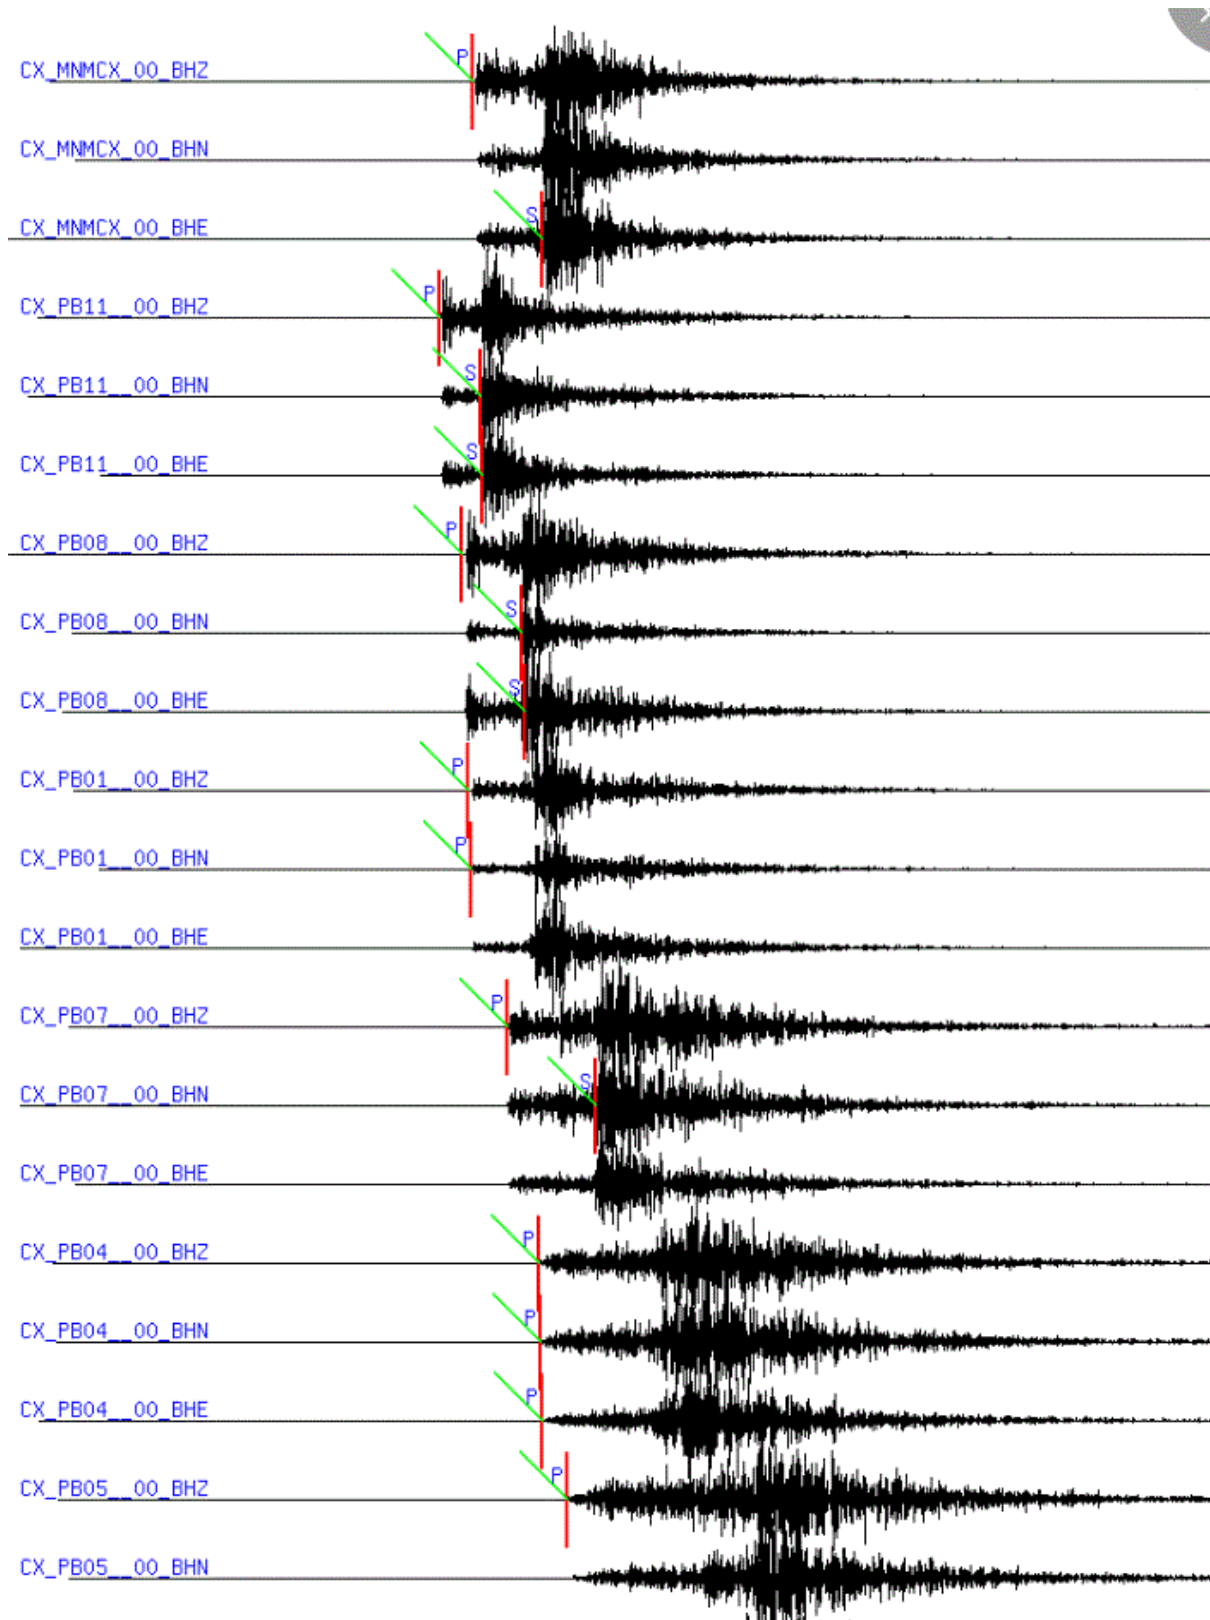

**Figure 13.2** ALL.png attachment showing a plot of recorded stations with phases marked.



```

2015 528 0955 13.1 LM-20.128 -70.207 15.0 BER 8 0.7 3.9CBER 1
GAP=205 1.36 6.8 16.9 19.1 -0.5680E+02 0.2369E+03 -0.6277E+01E
2015-05-28-0954-10.TST_054_00_01 6
ACTION:NEW 15-05-28 09:55 OP:SEIS STATUS: ID:20150528095510 I
STAT SP IPHASW D HRMM SECON CODA AMPLIT PERI AZIMU VELO AIN AR TRES W DIS CAZ7
PB11 BZ IP A 955 25.20 342 95 0.6910 70.5 55
PB11 BN IS 3A 955 34.50 95 1.52 2 70.5 55
PB11 BE IS 3A 955 34.80 70.5 55
PB08 BZ IP A 955 30.31 384 92 -0.2810 110 91
PB08 BN IS 3A 955 43.86 92 0.29 2 110 91
PB08 BE IS 3A 955 44.41 110 91
PB01 BZ IP A 955 31.76 388 55 -1.0010 126 144
PB01 BN IP A 955 32.41 405 126 144
MNM CXBZ IP A 955 32.60 409 55 -0.4910 128 30
MNM CXBE IS 3A 955 48.39 55 0.47 2 128 30
PB07 BZ IP A 955 40.56 409 55 1.0210 180 169
PB07 BN IS 3A 956 0.56 55 1.42 2 180 169
PB04 BZ IP A 955 47.71 338 55 0.2010 244 179
PB04 BN IP A 955 47.86 340 244 179
PB04 BE IP A 955 48.21 346 244 179
PB05 BZ IP A 955 54. 6 365 55 -0.0110 302 180
PB10 BN IP A 956 3.20 330 377 185
PB10 BZ IP A 956 3. 5 308 55 -0.3210 377 185
PB10 BE IP A 956 3.50 318 377 185

```

**Figure 13.3** The hyp.txt attachment. S-file for the recorded event.

## 14 AUTOPHASE

AUTOPHASE is started by RTDET if the parameter `-aut` is set to 1 as described in the test run chapter. AUTOPHASE will try to find p and s phases when possible and will update the s-file for the corresponding event in the SEISAN database. The phase picking algorithm is based on the FilterPicker algorithm (FilterPicker, Lomax et.al.,2011). AUTOPHASE then uses the s-file as input for the hypocenter program in an iterative process to reduce the residuals to a minimum as explained Chapter 11. Typical automatic readings are shown in Figure 14.1 and Figure 14.2 below.

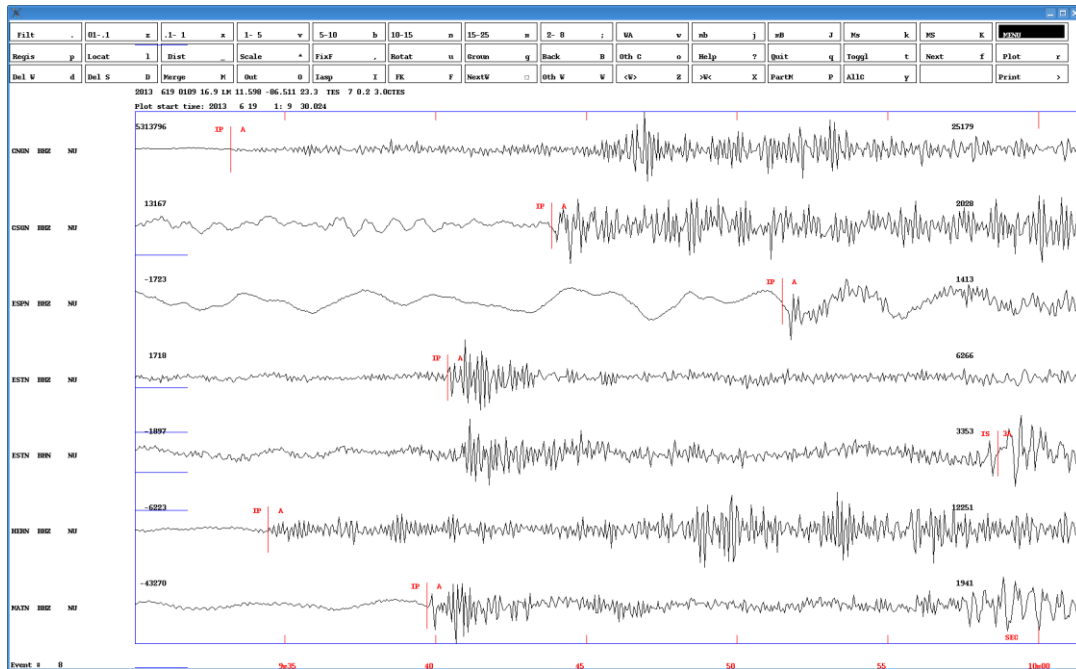


Figure 14.1 Automatic readings by AUTOPHASE.

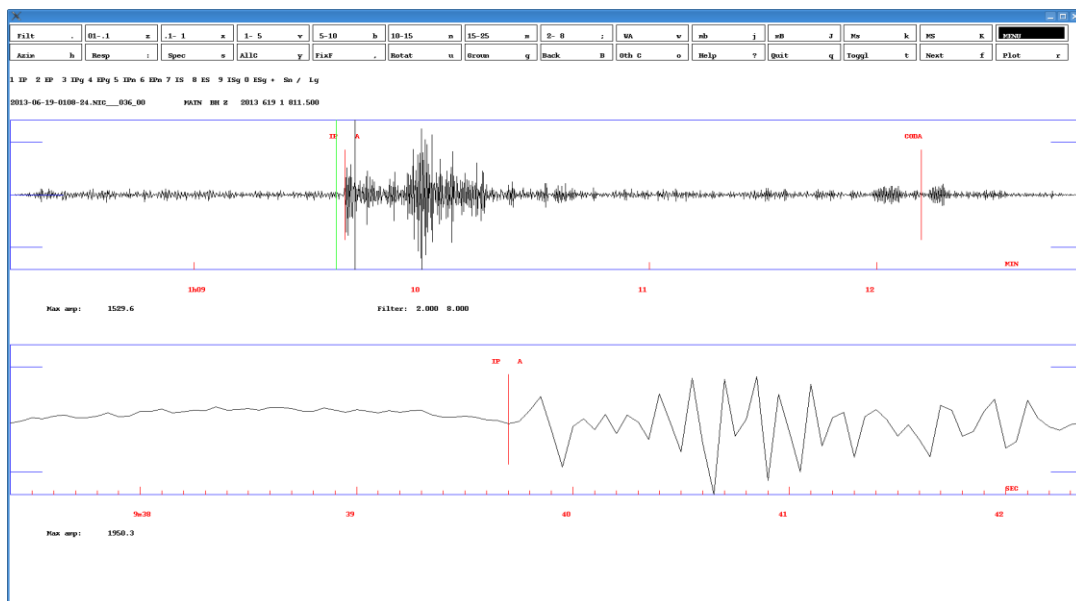


Figure 14.2 Automatic readings by AUTOPHASE.

If AUTOPHASE can produce a location for the event, two different html files are generated that will show the location on maps as shown in Figure 14.3 and Figure 14.4. A coda magnitude is computed based on the coda found by AUTOPHASE. The coda is computed as the length of the event from the first pick until the signal produces a long-term-average below the de-trigger level. The coda length is thus often smaller than the coda length that would have been picked manually.

The map in Figure 14.3 can be shown as a normal web page by entering the following link in the browser: `/home/seismo/mydir/rtq_web/map/LAST_TRIG.html`, where `/home/seismo/mydir` is where RTQUAKE is installed. The page is refreshed every 5 minutes (can be changed) so new auto located events will appear when detected by AUTOPHASE. A file called STATIONS must be located in the directory `mydir/rtq_web/map`. The STATIONS file must have the following format with “|” (space, vertical, space) between items:

Station-name, latitude, longitude, height, area-name text1 text2

for example:

```
PB01 | -21.04 | -69.48 | 900 | Huatacondo | abc | def
PB02 | -21.31 | -69.89 | 1015 | SalarGrande | aaa | bbb
```

Stations are marked on the map as triangles. Move the mouse over a triangle and press, and a plot of the signal with readings will appear in the window low-right if the signals are available.

In the window on top to the right of the map the S-file for the event is shown.

Be aware that the auto location is far from perfect and may give completely wrong locations when the phases are picked wrong!!!! This will of course depend a lot on the quality of the data.


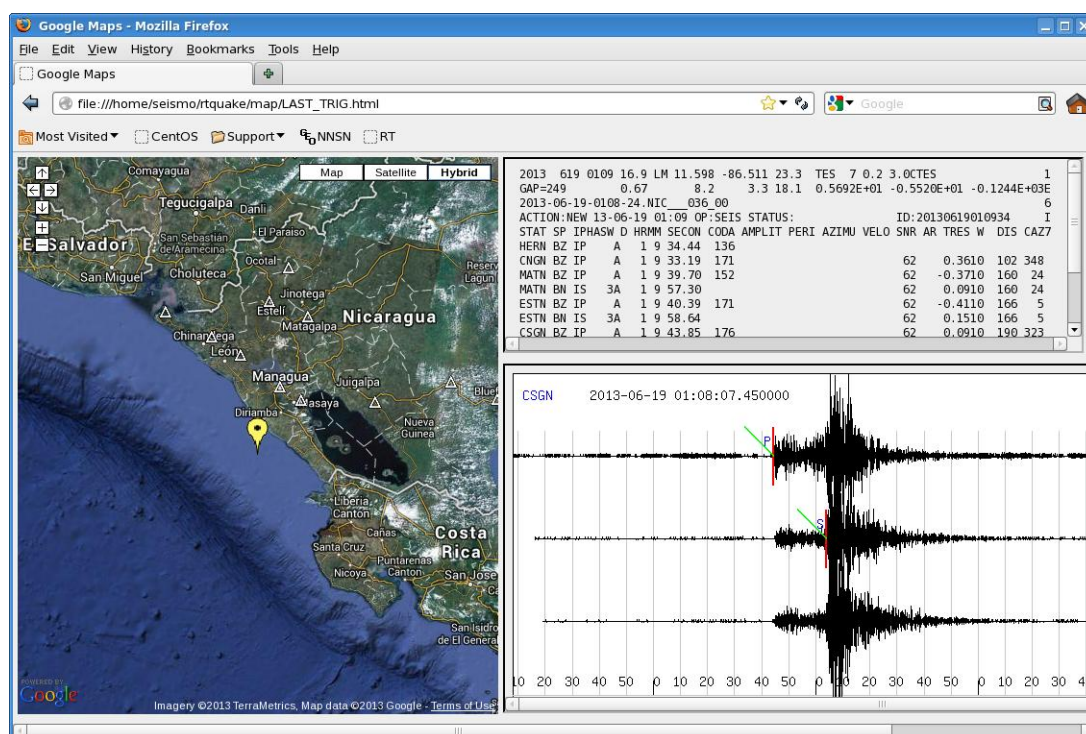


Figure 14.3 Web page generated by the AUTOPHASE routine.

RTQUAKE will also generate the html code for generating a static map as in Figure 14.4. The html files for all automatically located events will be stored under the /home/seismo/mydir/rtq\_web/loc catalog. The file names will have the format as for an S-file, plus the extension of html: 01-0854-34L.S201308.html

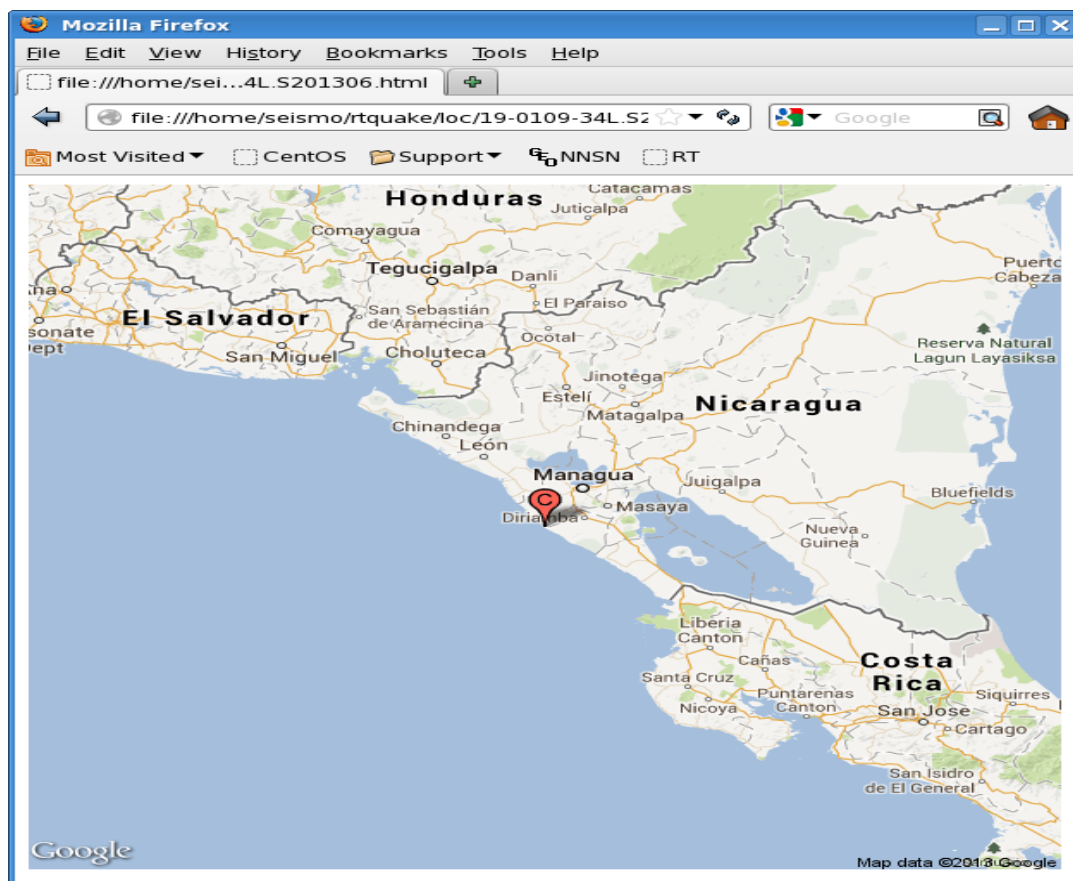

**Figure 14.4** Web page generated by the AUTOPHASE routine.

## 15 RTSNR

RTSNR monitors graphically how the current STA/LTA ratio is behaving for individual channels. Each instance of RTSNR can monitor one parameter set used by the RTDET module. Figure 15.1 below shows a typical output. The output shows how the ratio suddenly increase when an event occur. The different colours is just to distinguish between different channels. After a while, when the event finish, the ratio will drop back to the normal level as before the event. Before the event some sporadic noise that raises the ratio to above the trigger level, but as it occurs on one station only it is not considered a seismic event. The program can be useful to discover single channels or stations with sporadic or regular noise that causes unwanted triggers.

```
$ rtsnr -h
```

Command: rtsnr [options]

Options:

-h                show this usage message

Options:

-par    n        instance parameter set. (default: 0)  
-xo    pixels    position of window x-direction (default: 0)  
-yo    pixels    position of window y-direction (default: 0)

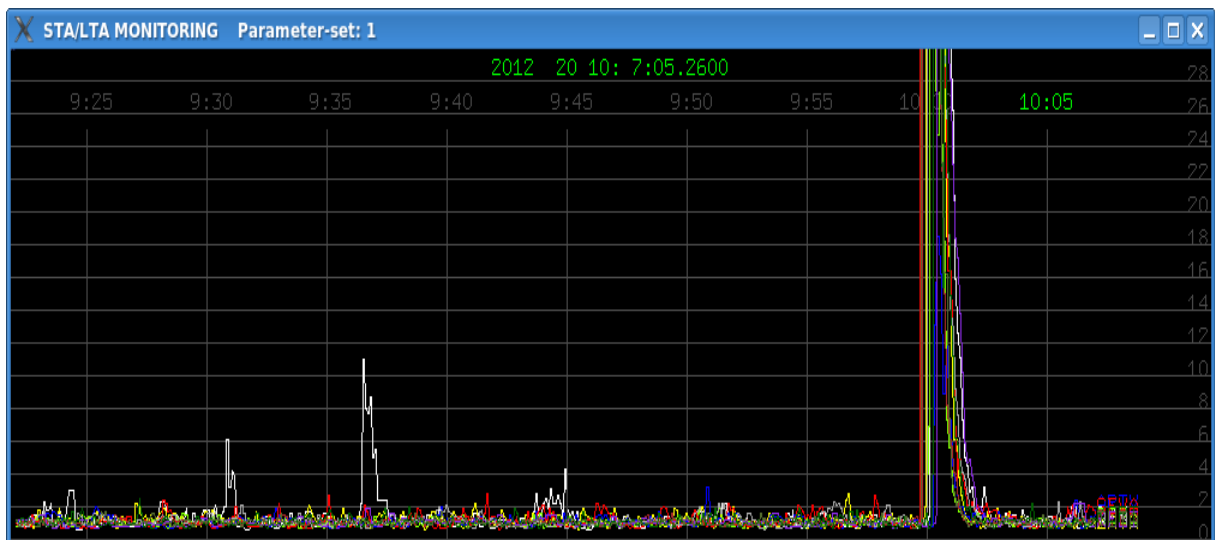


Figure 15.1 RTSNR

## 16 RTDLY

\$ rtdly -h

Command: rtdly [options]


Options:

-h show this usage message

-par n instance parameter set. (default: 0)

-xo pixels position of window x-direction (default: 0)

-yo pixels position of window y-direction (default: 0)

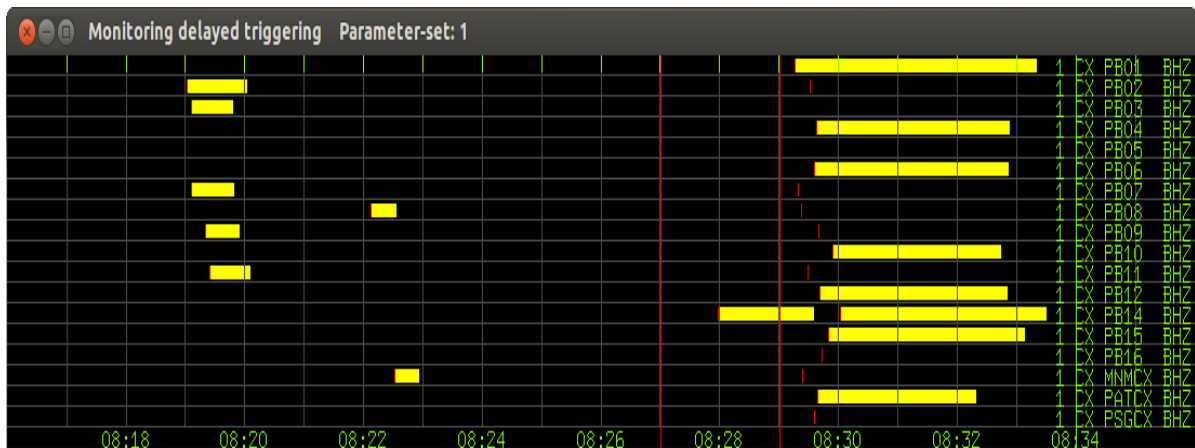

**Figure 16.1** RTDLY shows the onset and duration of triggers (yellow lines) for individual channels and the duration of the trigger. The green vertical line to the right indicates the current time. The two vertical red lines indicate the array-propagation-window within which the detection of the event is performed. RTQUAKE can be set up to wait up to 30 minutes before checking for triggers in order to also include delayed channels. Delayed triggers will show up at correct time in the display, and the network trigger will take place within the array propagation window, in this case two minutes wide and seven minutes delayed (left red line). The red and the yellow markers seen closer to the current time-line are individual triggers for a new event. The display can be useful to optimize the delay and array propagation window parameters.

The graphics is dynamic in the sense that the user will see the onsets and duration of the triggers slowly moving to the left towards the array-propagation-window where network triggering takes place. The timelines for the array propagation window and current time are positioned statically while the time scale at the bottom changes according to current UTC time.

Normally the trigger onsets are marked close to real time near the green line marking the current time. In cases where for example data transmission is slow, signals may be received with a significant latency. The triggers will however be marked on the plot at the correct time of occurrence when data is available. In Figure 16.1 we allowed for a latency of 7 minutes which is the total time from the current time to the end of the APW to the left. The APW has been set to 2 minutes. As the trigger onsets move towards and into the APW, the network trigger algorithm will decide if there are sufficient triggers to define a network trigger

This approach secures that trigger onsets arriving up to 7 minutes delayed still are contributing for the network trigger inside the APW. The allowed latency and APW are set by parameters. The display can be useful to optimize the delay and array propagation window parameters. Components that cause frequent false onsets can easily be observed on the display.

## 17 RTNET

The module plots selected components from seismic stations in near-real time. The module can read data from one SeedLink server only, but several instances of the module can run at the same time reading from different SeedLink servers.

```
$ rtnet -h
```

Command: `rtnet [options] [host][:port]`

Options:

```
-V          report program version
-h          show this usage message
-top text   top directory (default: /home/seismo)
-c          print stations.conf file
-p          print details of data packets
-d          print full station name on each seismogram
-sc         auto-scaling each new data buffer
```

## Graphics options ##

```
-x pixels   width window in pixels (default: 1000)
-y pixels   height window in pixels (default: 600)
-buf n      0-double 1-single buffering (default: 0)
-xo pixels  position of window x-direction (default: 0)
-yo pixels  position of window y-direction (default: 0)
-m          minutes over screen: 1,2,3,4,5,10,15,30,60 (default: 15)
```

## Filter options ##

```
-fl low     lowpass frequency
-fh high    highpass frequency
```

## Data stream selection and station file##

```
-l str      The routine will look for the filename you specify under the
            /home/seismo/mydir/par/user_created_subdirectory
            catalog. To specify a file stored in the user subdirectory, you specify the subdirectory
            name and the filename.
```

Example:

A stream file stored in /home/seismo/mydir/par/DEMO1 -l DEMO1/streams\_plot

```
-f stat     The routine will look for the filename you specify under the
            /home/seismo/mydir/par/user_created_subdirectory
            catalog. To specify a file stored in the user subdirectory you specify the subdirectory
            name and the filename.
```

Example:

A station file stored in /home/seismo/mydir/par/DEMO1: -f DEMO1/stations\_plot

```
-n no       number of stations to plot
-a no       which station to plot (0,1,2,3.....)
```

[host][:port] Address of the SeedLink server in host:port format  
f.ex.: 129.177.xx.yy:18000  
f.ex.: localhost:18000



The different seismograms are scrolled to the left on the screen when plotting reaches the right end of the defined window for the plot. Each seismogram is plotted individually in its own window. This means that each seismogram have its individual timing.

RTNET needs 2 parameter files, one for defining the input streams of data and another to define the actual components to plot. The names for these files are `streams_plot` and `stations_plot` respectively and are stored in `/home/seismo/mydir/par/DEMO1`. The two files are initially set equal to the plot files for the test run and the example plots below can be run from the command line after the installation.

The module has several input parameters. Some can also be modified interactively during execution of the program.

An option to filter the incoming data can be activated while running. This option will also start a simple detection algorithm and mark probable events on the plot.

The program will mark stations that have not received data for the last 60 seconds. Another indicator can be a red square in the upper right corner of each seismogram window that indicates that GPS timing is out of synchronization.

The different options can be controlled partly during the start command and partly while running via keyboard or menu.

All options will be described in more detail below. Some examples on how to use it will be given at the end of this documentation.

Two parameter files define the data that are available for the RTNET client:

`streams_plot` and `stations_plot`.

**`streams_plot`** contains information of which data the SeedLink server should send to the RTNET client. The format follows the standard in SeedLink for defining data streams:

```
CX PB01 BHZ      network: CX      station: PB01  component: BHZ
CX PB02 BHZ
CX PB03 BHZ
CX PB04 BHZ
CX PB05 BHZ
CX PB06 BHZ
CX PB07 BHZ
CX PB08 BHZ
CX PB09 BHZ
CX PB10 BHZ
CX PB11 BHZ
CX PB12 BHZ
```

**`stations_plot`** contains information of which data the RTNET client may use. For example a setup to only plot vertical components. The location parameter must be included. The full name of the station is used when the `-d` (as in the test configuration) is selected. This option is included to make the text more informative for the public.

```
PB01 BHZ PB01 Huatacondo      station: PB01 component: BHZ title: PB01 Huatacondo
PB02 BHZ PB02 Salar Grande
PB03 BHZ PB03 El Tigre
PB04 BHZ PB04 Mantos de la Luna
PB05 BHZ PB05 Michilla
PB06 BHZ PB06 Pedro de Valdivia
PB07 BHZ PB07 Cerro Tatas
PB08 BHZ PB08 Macaya
PB09 BHZ PB09 Quillagua
PB10 BHZ PB10 Juan Lopez
PB11 BHZ PB11 Quebrada Aricilda
PB12 BHZ PB12 Cerro Caramaca
```

When you have generated the two parameter files `streams_plot` and `stations_plot` you can start RTNET first time like below to get all the options available:

## `rtnet -h`

```
Usage: rtnet [options] [host][:port]

## General program options ##
-V          report program version
-h          show this usage message
-c          print stations.conf file
-p          print details of data packets
-d          print full station name on each seismogram
-sc         auto-scaling each new data buffer

## Graphics options ##
-x pixels   width window in pixels (default: 1000)
-y pixels   height window in pixels (default: 600)
-m minutes  minutes over screen:1,2,3,4,5,10,15,30,60 (default: 15)

## Filter options ##
-fl lowpass  lowpass frequency
-fh highpass highpass frequency

## Data stream selection and station file##
-l listfile  read a stream list from this file
-f stationfile read a station list from this file
-n no_to_plot number of stations to plot
-a station no which station to plot (0,1,2,3.....)

[host][:port] Address of the SeedLink server in host:port format
```

The different options are self explanatory, but a few may need some more explanation.

### General program options:

- `-d` This option can be used when the monitor is installed to give a clearer view of the station names, for example: Kongsberg instead of KONO 10BHZ, and the timing is shown as complete dates rather than day of year. Both text strings are also in bigger fonts.
- The text, full station name can be added in the `stations.conf` file after the standard name as for example: KONO 10BHZ Kongsberg

### The graphics options:

The upper left corner of the active drawing window is always placed in the upper left corner of the screen.

- `-x pixels` This parameter sets the width of the active drawing window and must never be bigger than the total width of the screen. Default is 1000 pixels.
- `-y pixels` This parameter sets the height of the active drawing window and must never be bigger than the total height of the screen. Default is 600 pixels.
- `-m minutes` This parameter sets the total number of minutes across the active drawing area selected above. Options are: 1,2,3,4,5,10,15,30 and 60 minutes. Default is 15 minutes.

### Filter options:

When starting the program without `-fl` and `-fh` set to any values, the data plotted on the screen are unfiltered. However, via the keyboard or the menu, a pre-set filter (2.0-8.0 Hz) can be activated. This filter can be turned on and off while running. Turning on the filter will also activate a simple detection algorithm that will mark probable events in the seismograms.

The options `-fl` and `-fh` are to be used from the command line when starting the program and can be set to the values you decide.

Data stream selection and station file options:

- `-l listfile`      read stream list from this file
- `-f stationfile`    read station list from this file
- `-n no_to_plot`    number of components to plot. This parameter can be any number up to the number of components specified in the `stations_plot` file.
- `-a station`      which station to plot. (0,1,2.....number of stations in the `station.conf` file). This option can be used to check one particular component. The default time window is 2 minutes, so that more details are visible in the seismogram.

The sequence of lines (stations and components) in both files are free. However, the sequence of the lines in the `stations.conf` file will decide the sequence of stations plotted. This can give a more logical sequence of stations for example from north-south, east-west etc.

The SeedLink server `host:port` should always be included on the command line when starting the program.

Options that can be used interactively while program is running.

They can be activated from keyboard or from a menu (right-click on mouse). To see the different options, press 'h' on the keyboard or right-click on the mouse. The different options are:


List of key-press functions:

```
-----
h  : list this on screen
esc: exit
u  : increase amplitude on all channels
d  : decrease amplitude on all channels
S  : freeze graphics
s  : resume graphics
n  : next channel
+  : increase amplitude on current channel
-  : decrease amplitude on current channel
F  : turn on pre-set filter
f  : turn off filtering
1  : Set color scheme to default
2  : Color scheme 2
3  : Color scheme 3
4  : Color scheme 4
```

Note the 'S' and 's' options: The plotting can be halted with the 'S' when something interesting happens. You may take a screenshot and then resume plotting with 's'.


When the program is running, a plot of a selected channel can be plotted in a separate window to see more details in the signal. Point on the channel with the mouse (around zero-level) and left-click on the mouse.

Examples of running RTNET.

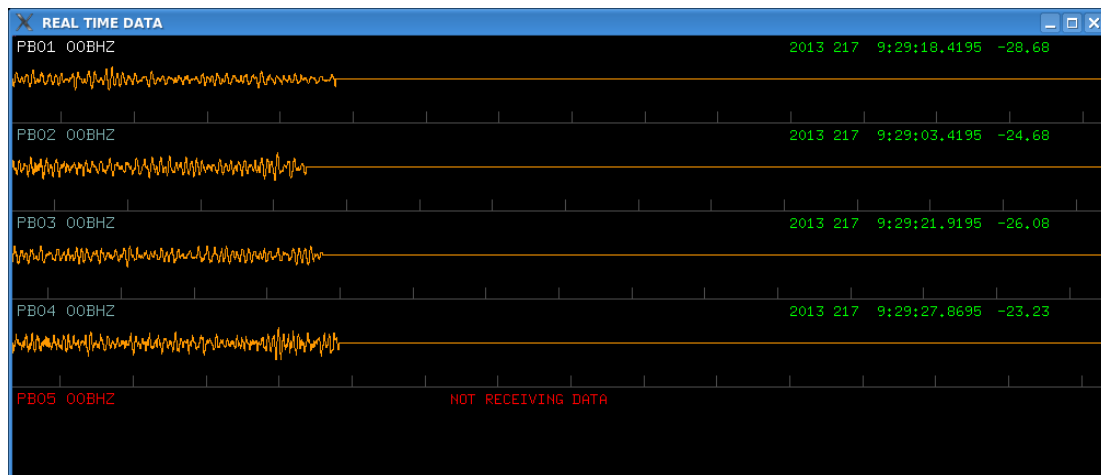


**Figure 17.1 From command line:** `rtnet -n 5 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`

Plot the 5 first channels in the `stations_plot` file. For station PB05 we see the message ‘NOT RECEIVING DATA’. This means that the RTNET program has not received data from this station for at least the last 60 seconds. It may be a reason for further checking of this station.

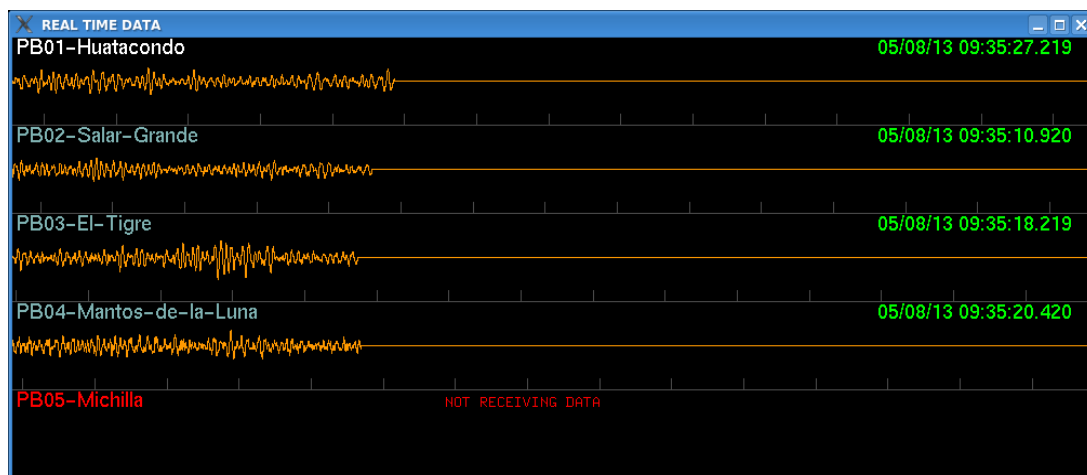


**Figure 17.2 From command line:** `rtnet -n 5 -d -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`

Plot the 5 first channels in `stations_plot` file with the option `-d`. This will plot the text field in the `stations_plot` file, normally a geographical name.

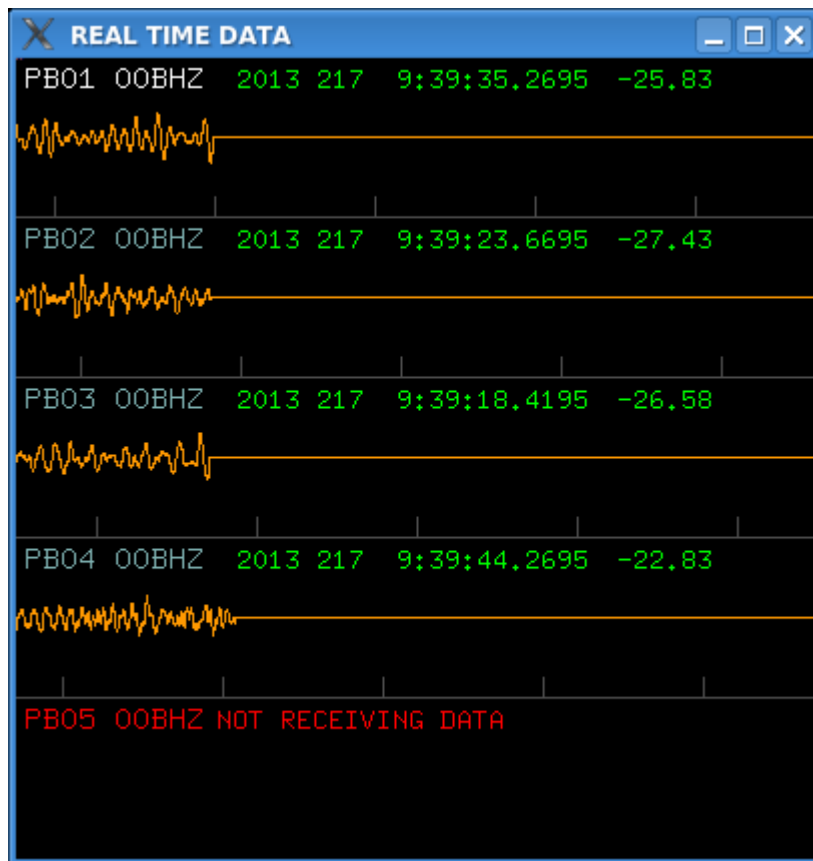


**Figure 17.3 From command line:** `rtnet -n 5 -d -m 5 -x 400 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`

Plot the first 5 channels in stations\_plot file, textfield, 5 minutes x-axis and x-axis 400 pixels long.

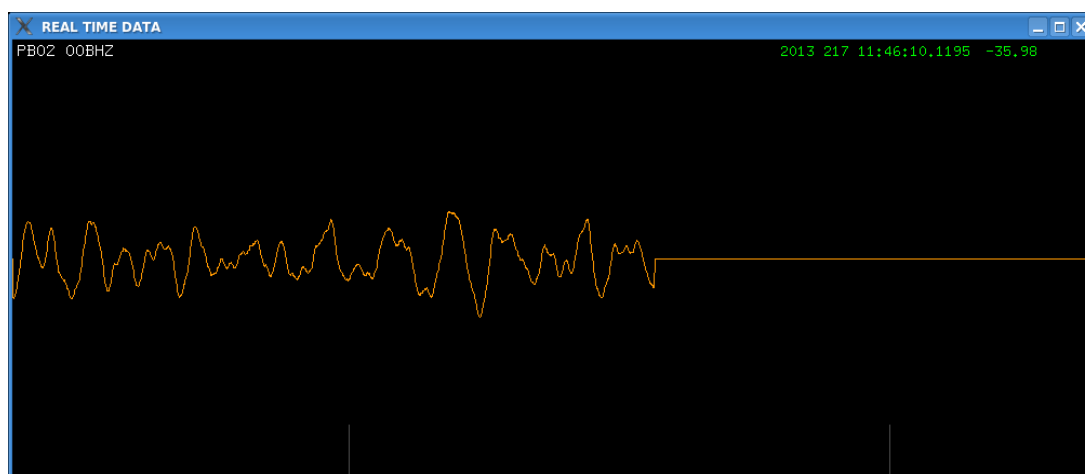

**Figure 17.4 From command line:** `rtnet -a 1 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`

Plot the second (1) channel in stations\_plot file with default values.

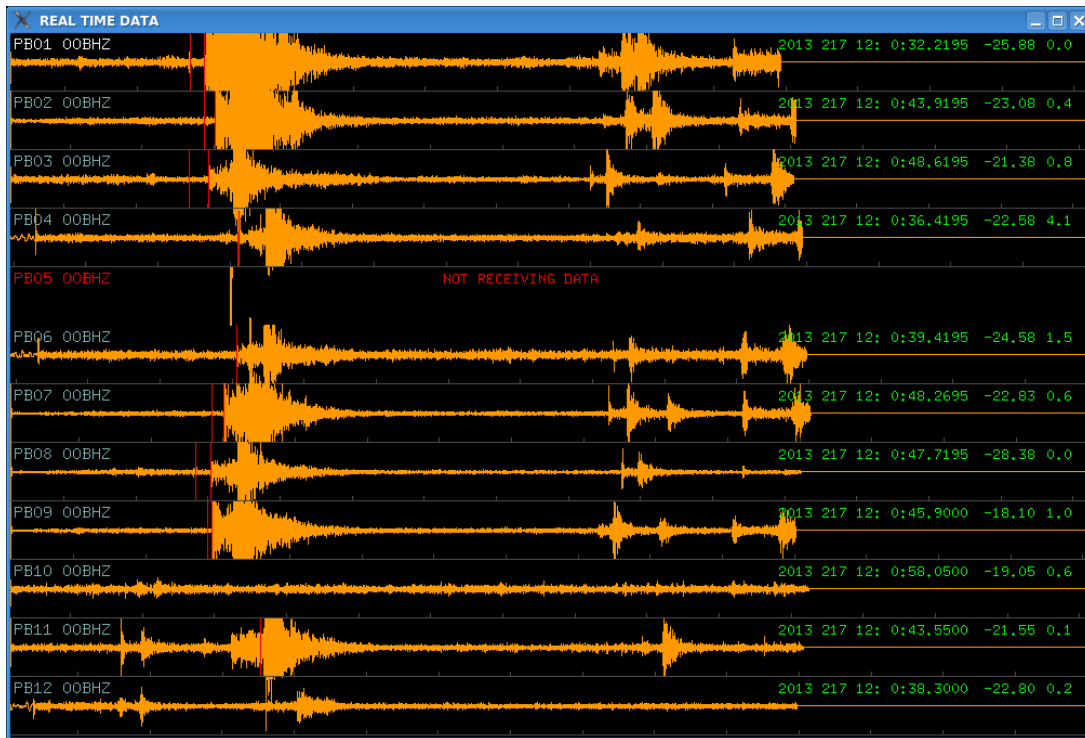


**Figure 17.5** From command line: `rtnet -n 12 -y 650 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`


Plot the first 12 channels in the `stations_plot` file; make the drawing window 650 pixels high. Filter was turned on from keyboard 'F', and there is a detection indicated on several channels.

Several instances of RTNET can be executed at the same time reading data from the same or different SeedLink servers. Execution can also be started from script-files. This way RTNET can be started automatically at reboot of the PC.

The user can make different script-files that start RTNET with different options. In this way it is possible to for example monitor both unfiltered and filtered signals in two different windows, see Figure 17.6 and Figure 17.7.

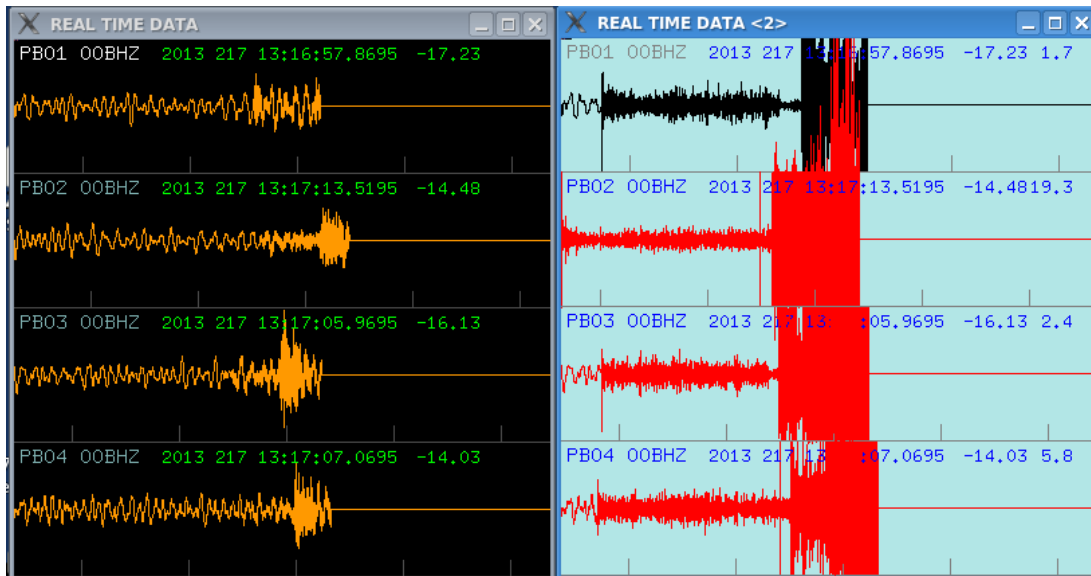

**Figure 17.6** From command line: `rtnet -n 4 -m 5 -x 400 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`

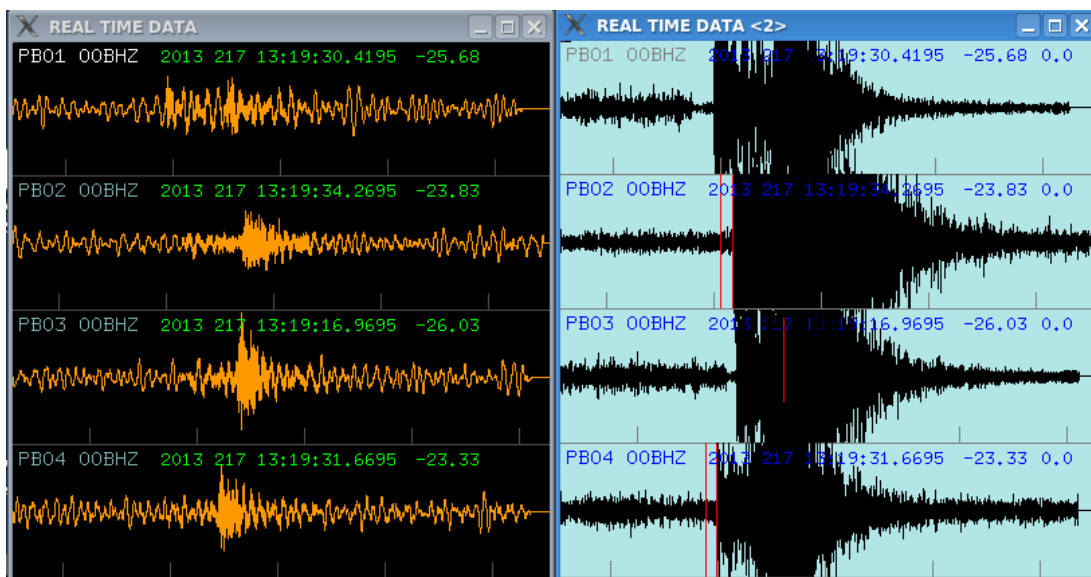

**Figure 17.7** From command line: `rtnet -n 4 -m 5 -x 400 -l DEMO1/streams_plot -f DEMO1/stations_plot 139.17.3.177:18000`

In the example above, two instances of RTNET is running side by side with the same initial command line. The colour scheme on the window on the right has been changed interactively via the right-click menu. The window on the right show filtered data (2-8 Hz). The filter was activated with the right-click menu. We also see that the detection algorithm has detected and marked a probable event. The seismogram is plotted in red as long as the detection algorithm is in trigger-mode.

## 18 RTSLPL

This module is very similar to the RTNET in the previous chapter. It has less options, but the main advantage is that it can read data from several SeedLink servers in one session. The module has a simple parameter file (mydir/par/DEMO1/rtsl\_config) as described in chapter 5.6.

### rtsl\_config

```
SERVERS
S01 139.17.3.177
S02 rtserve.iris.washington.edu
-----
NW STAT  LOC CMP SERVER
CX PB01  ..  BHZ S01
CX PB02  ..  BHZ S01
CX PB03  ..  BHZ S01
CX PB04  ..  BHZ S01
CX PB05  ..  BHZ S01
CX PB06  ..  BHZ S01
CX PB10  ..  BHZ S01
IU LVC   00  BHZ S02
IU LVC   00  BH1 S02
IU LVC   00  BH2 S02
-----
```

In the example above stations from 2 SeedLink servers are plotted.

```
rtslpl -h
RTSLPL: RTQUAKE_TOP:           /home/seismo/rtquake
Valid program options:
-h                show this usage message
-d                print full station name on each seismogram

-x  pixels        width window in pixels (default: 1000)
-y  pixels        height window in pixels (default: 600)
-buf n            0-double 1-single buffering (default: 0)
-xo pixels        position of window x-direction (default: 0)
-yo pixels        position of window y-direction (default: 0)
-m  minutes       minutes over screen: 1,2,3,4,5,10,15,30,60 (default: 15)
-col n            color option: 0 (default),1,2,3,4


-fl  lowpass      lowpass frequency
-fh  highpass     highpass frequency

-cfg parameter    Specify catalog under /par where parameter file is stored
```

Figure 18.1 is produced with the command below using the parameter file above, and shows data from stations in Chile, from two different SeedLink servers, in close to real-time.

**rtslpl -fl 2.0 -fh 8.0 -cfg DEMO1**



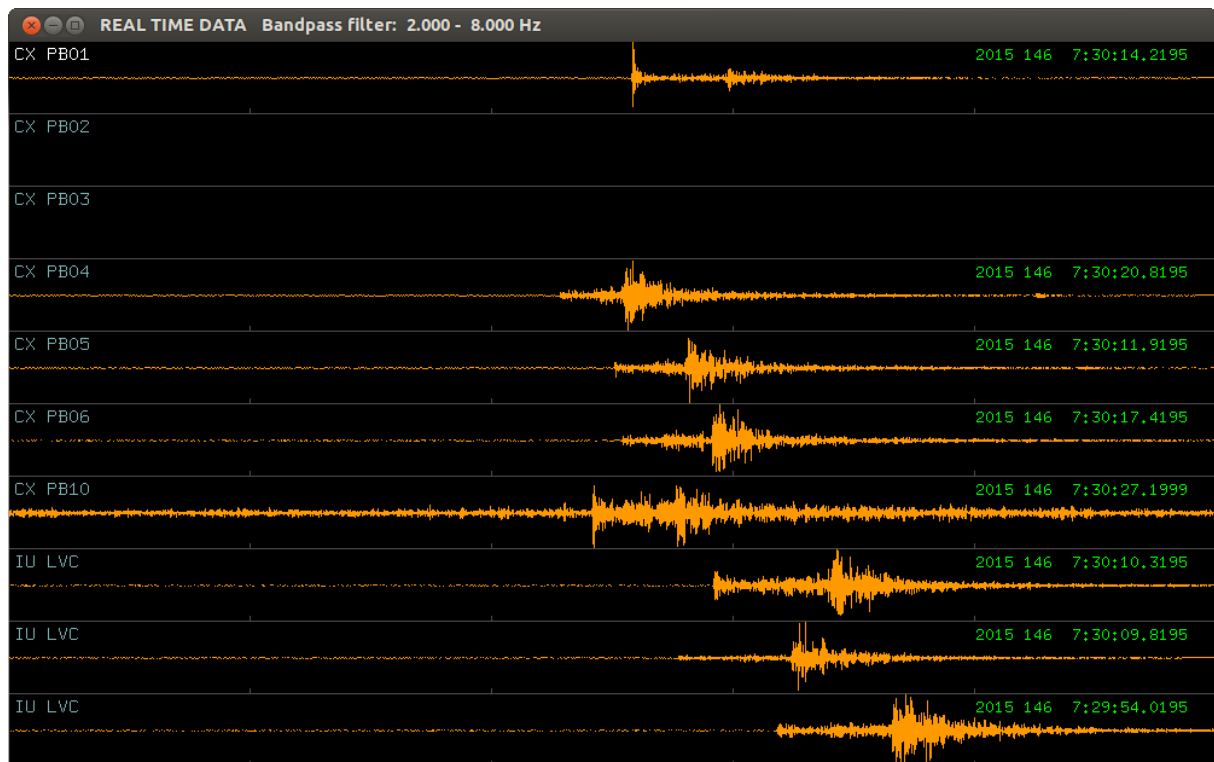

**Figure 18.1** Plot showing real-time data from two different SeedLink servers.

The data from the CX network are read from the [geofon.gfz-potsdam.de](http://geofon.gfz-potsdam.de) (139.17.3.177) server and the data from the IU network are read from the IRIS server ([rtserve.iris.washington.edu](http://rtserve.iris.washington.edu)).

You exit the program by pressing 'ESC', 'Q' or 'q' in the active window.

## 19 RTCHK

This module is based on the RTSLPL module in the previous chapter. It can be used to check data from a specific station by connecting to a SeedLink server that holds data from the actual station. Normally three components will be shown, but in the case of signals with different sampling-rates or different sensors, all components will be shown.

Two plots are shown: one with the original data and one with filtered data (default: 2.0-8.0 Hz).

Type **rtchk -h** on the command line to see the different options:

```
rtchk -h
RTCHK: RTQUAKE_TOP:      /home/seismo/rtquake
Valid program options:
-h          show this help info
-sl text    Seedlink address
-st text    Station name to check, f.ex. BER
-cm text    Component(s), f.ex. BH or HH or HHZ
-fl real    Lowpass filter (default: 2.0)
-fh real    Highpass filter (default: 8.0)
-m minutes  Minutes to plot, 1,2,3,4,5,10,15,30,60 (default: 5)
-x pixels   Width of window in pixels (default: 1200)
-y pixels   Height of window in pixels (default: 300)
```

-sl Here you must specify the seedlink server from where you want to read the data.

-st Here you must specify the name of the station you want plot.

The other parameters have default values.

Some SeedLink servers record many components from the same station. The user normally wants to look at a 3-component selection like the HHZ,HHN,HHE or BHZ,BHN,BHE. The parameter -cm can be used to sort out the components the user wants.

As the KONO station has a lot of components recorded on the IRIS SeedLink server, the command:

**rtchk -sl rtserve.iris.washington.edu -st KONO**

will try to create a plot with the following components found on the SeedLink server. The program rtchk has a limit of 6 components, so the program will exit.

```
IU KONO 00 BH1
IU KONO 00 BH2
IU KONO 00 BHZ
IU KONO 00 LH1
IU KONO 00 LH2
IU KONO 00 LHZ
IU KONO 00 VH1
IU KONO 00 VH2
IU KONO 00 VHZ
IU KONO 00 VM1
IU KONO 00 VM2
IU KONO 00 VMZ
IU KONO 10 BH1
IU KONO 10 BH2
IU KONO 10 BHZ
IU KONO 10 LH1
IU KONO 10 LH2
```

```

IU KONO 10 LHZ
IU KONO 10 VH1
IU KONO 10 VH2
IU KONO 10 VHZ
IU KONO 10 VM1
IU KONO 10 VM2
IU KONO 10 VMZ
IU KONO 20 LN1
IU KONO 20 LN2
IU KONO 20 LNZ
More than 6 available components, use -cm to specify

```

Below two examples that show how the `-cm` argument can be used to specify the components the user wants to plot.

**`rtchk -sl rtserve.iris.washington.edu -st KONO -cm B`**

```

IU KONO 00 BH1
IU KONO 00 BH2
IU KONO 00 BHZ
IU KONO 10 BH1
IU KONO 10 BH2
IU KONO 10 BHZ


```

The command **`rtchk -sl rtserve.iris.washington.edu -st KONO -cm "00 B"`** show the plot below in Figure 19.1.

```


IU KONO 00 BH1
IU KONO 00 BH2
IU KONO 00 BHZ

```

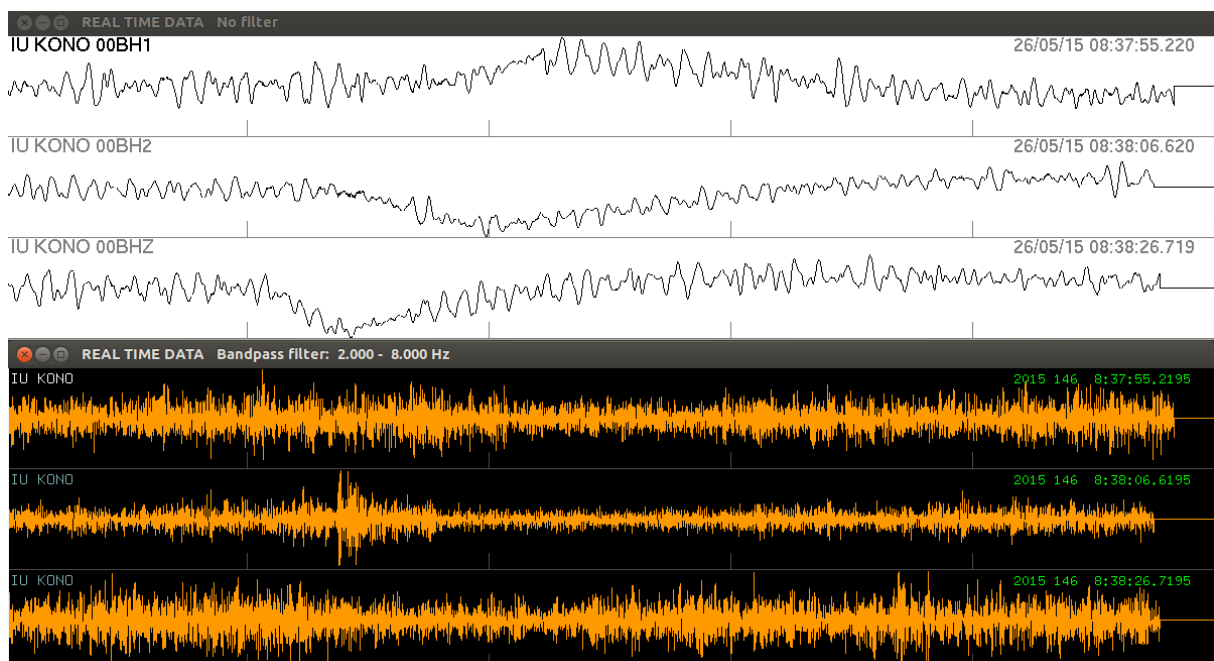

**Figure 19.1** Original and filtered data from station KONO

The command **rtchk -sl 139.17.3.177 -st PB01 -cm BH** show the plot below in Figure 19.2

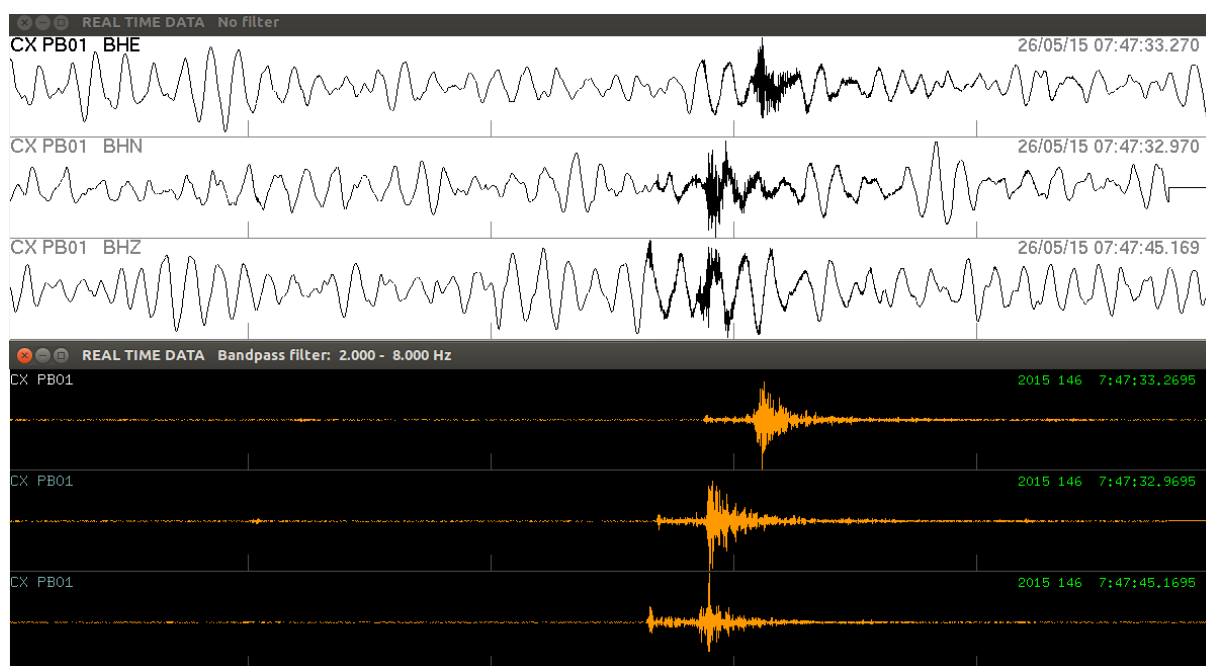

**Figure 19.2** Original and filtered data from station PB01

You exit the program by pressing 'ESC', 'Q' or 'q' in the active window.

## 20 RTTIME

This module can be used to monitor the status of the stations configured in a SeedLink server, see Figure 20.1. It can be used for monitoring a number of stations that can actually fit your display. By pressing the mouse over a station that is marked green, the RTNET program will be started to give a more detailed plot of the signal from that particular station. See Figure 20.2.

The module can read data from one SeedLink server only, but several instances of the module can run at the same time reading from different SeedLink servers.

\$ rtime -h


Command: rtgraph [options] [host][:port]

Options:

-h show this usage message  
 -top top directory (default: /home/seismo)  
 -sizx pixels length of window in pixels (default:1200)  
 -sizy pixels height of window in pixels (default: 500)  
 -buf n 0-double 1-single buffering (default: 0)  
 -xo pixels position of window x-direction (default: 0)  
 -yo pixels position of window y-direction (default: 0)  
 [host][:port] address of the SeedLink server in host:port format  
 f.ex.: 129.177.xx.xx:18000  
 f.ex.: localhost:18000



Figure 20.1 RTTIME window.

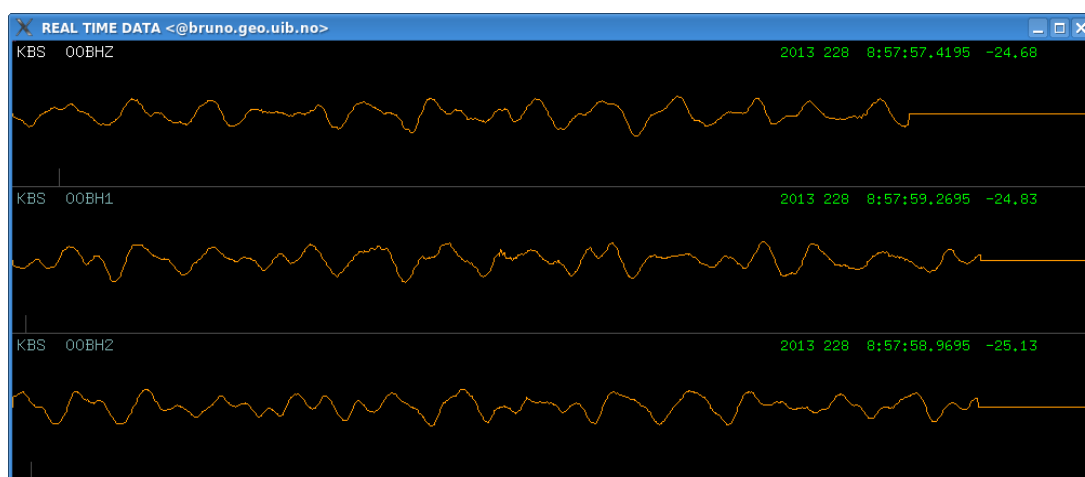

**Figure 20.2** RTNET started from the RTTIME window.

## 21 RTGMT

This routine produces different bash scripts dynamically depending on the command line input arguments. These scripts are automatically started by the `rtgmt` and will produce different maps according to the input arguments.

The routine uses the GMT - The Generic Mapping Tools, Version 5.2.1 64-bit.

**The user must install the GMT software and download the `newbathy.grd` from `ftp://ftp.geo.uib.no/pub/seismo/SOFTWARE/GMTEXAMPLES/DATA` and store it in `/RTQUAKE_TOP/rtqgmt/DATA`**

**The `gv` Postscript and PDF viewer for X that must be installed on the system and also the `gawk` utility.**

RTQUAKE produces two different files that are used by default by the `rtgmt` routine (both stored in the `/HTML_TOP/map` catalog and with the same format:

`GMT_EPI0.txt` contains all recent automatic locations done by RTQUAKE with data, longitude, latitude, number of stations used, magnitude, depth and a text-string with the geographical name (UTF-8). In the example below the last 7 events are listed. The geographical description is in UTF-8 and will be converted in the program.

```
2017 4 15 16 10 18 -69.88 -22.586 12 2.0 0.0 Provincia de Tocopilla, II Región de Antofagasta, Chile
2017 4 15 16 15 13 -68.36 -22.080 15 2.2 115.1 Provincia de El Loa, II Región de Antofagasta, Chile
2017 4 15 16 33 37 -68.95 -20.559 16 2.3 82.2 Provincia del Tamarugal, I Región de Tarapacá, Chile
2017 4 15 16 58 45 -70.34 -19.612 16 2.3 1.4 Provincia del Tamarugal, I Región de Tarapacá, Chile
2017 4 15 17 2 22 -68.49 -21.505 12 1.7 121.8 Provincia de El Loa, II Región de Antofagasta, Chile
2017 4 15 17 34 59 -69.28 -20.829 12 1.7 1.3 Provincia del Tamarugal, I Región de Tarapacá, Chile
2017 4 16 11 36 3 -69.59 -23.242 19 3.9 62.3 Provincia de Antofagasta, II Región de Antofagasta, Chile
```

`GMT_LAST_LOC.txt` contains a copy of the last line in the `GMT_EPI0.txt` file

```
2017 4 16 11 36 3 -69.59 -23.242 19 3.9 -1.0 Provincia de Antofagasta, II Región de Antofagasta, Chile
```

The location string contains UTF-8 characters and the `rtgmt` routine will convert this to standard ASCII so it can be used directly in GMT.

Be aware that the user will have to clean these files when installing a new system.

**stations**          user must add new stations here when needed in same format

```
-69.48740 -21.04323 t cyan 4 PB01
-69.89603 -21.31973 t cyan 4 PB02
-69.75310 -22.04847 t cyan 4 PB03
-70.14918 -22.33369 t cyan 4 PB04
-70.20235 -22.85283 t cyan 4 PB05
-69.57188 -22.70580 t cyan 4 PB06
-69.88618 -21.72667 t cyan 4 PB07
-69.15340 -20.14112 t cyan 4 PB08
-69.24192 -21.79638 t cyan 4 PB09
-70.55408 -23.51343 t cyan 4 PB10
-69.65582 -19.76096 t cyan 4 PB11
-70.32808 -18.61401 t cyan 4 PB12
```

## **quakes.cpt** color model for depth

# color palette for seismicity

#z0	red	green	blue	z1	red	green	blue
0	255	0	0	100	255	0	0
100	0	255	0	300	0	255	0
300	0	0	255	100000	0	0	255

In /RTQUAKE\_TOP/rtqgmt/DATA the bathymetry file is stored.

Maps produced will be stored in your current directory in the form of jpg, ps and eps files.

How to use the rtgmt:

### **rtgmt -h**

-h	show this message
-tt text	Top title. Format: "This is my new map". Default: location name in GMT_LAST_LOC.txt
-fn text	Map filename (jpg,ps and eps is added). Default: Plot_stn
-co text	Coordinates: xmin (longitude), xmax(longitude), ymin (latitude), ymax (latitude)
-stat	Do not include stations. Default: include stations from file stations if inside map frame.
-epi	Do not include locations. Default: include locations from file GMT_EPI0.txt
-gv	No preview with gv
-st	no subtitle below map

Running any argument combination (or no arguments) will automatically create a bash script called rtqgmt.sh in the /RTQUAKE\_TOP/rtqgmt catalog. The user can use this script as an example and do modifications to adjust the output to what is needed. However, when rtgmt is run again, the rtqgmt.sh will be overwritten.

In the catalog /RTQUAKE\_TOP/rtqgmt some working examples are included. Some of them are shown and explained below.

### **rtgmt**

- This example uses default values for the rtgmt:
- Title of plot is extracted from the GMT\_LAST\_LOC.txt file and converted from UTF-8 to ASCII:  
Provincia de Tocopilla, II Region de Antofagasta, Chile
- Stations are plotted based on the stations file
- Locations are plotted based on the GMT\_EPI0.txt file. Magnitude is indicated by the radius of each circle and the color indicates depth of the event based on the color code file quakes.cpt.



- The last event is marked with a black star inside the circle and is placed in the center of the map.
- A subtitle is appended below the map with text extracted from the last line in the file /HTML\_TOP/ALL\_LOC.txt

The script generated by the default `rtgmt` command is shown below with the corresponding map. The script can be used as an example for the user to do modifications that fits individual needs.

## rtgmt.sh


```
#!/bin/bash
file=Plot_stn.ps
rm -f *.grd
grdfile=/home/seismo/rtnew/rtgmt/DATA/newbathy.grd
xmin=-72
xmax=-66
ymax=-20
ymin=-25
midlon=`gmt gmtmath -Q $xmin $xmax ADD 2 DIV =`
midlat=`gmt gmtmath -Q $ymin $ymax ADD 2 DIV =`
R="-R$xmin/$xmax/$ymin/$ymax"
J="-JM$midlon/$midlat/16c"
gmt grdcut $grdfile $R -Gtmpf.grd
gmt grdinfo tmpf.grd
gmt makecpt -Cglobe -T-8500/8500/50 -Z > cptfile2.cpt
top2=`echo echo "Provincia de Antofagasta, II Región de Antofagasta, Chile" | iconv -f utf-8 -t
ascii//TRANSLIT`
gmt psbasemap -B1g1 -B+t"Provincia de Antofagasta, II Region de Antofagasta, Chile
" $J $R -K -P > $file
gmt grdgradient tmpf.grd -Nt1 -A225 -Gtmpgrd.grd
gmt grdimage $J $R tmpf.grd -ltmpgrd.grd -O -K -Ccptfile2.cpt >> $file
gmt pscoast $J -B $R -Dh -N1/1.00p,- -K -O -W >> $file
sizecoef=.2
adjust=-0.2
while read line
do
lon=`echo $line | gawk '{print $1}'`
lat=`echo $line | gawk '{print $2}'`
sym=`echo $line | gawk '{print $3}'`
col=`echo $line | gawk '{print $4}'`
cof=`echo $line | gawk -v var=$sizecoef '{print $5*var}'`
stn=`echo $line | gawk '{print $6}'`
echo $lon $lat $sym$cof | gmt psxy $J $R -O -K -S -W -G$col >> $file
lon2=$(echo "$lon + $adjust"|bc)
echo $lon2 $lat $stn | gmt pstext $J $R -O -F+f12p,Helvetica-Bold+jRB -K >> $file
done < "/home/seismo/rtnew/rtgmt/stations"
gmt pstext -R -J -N -K -O -V -F+f15,1,blue+j << EOF >> $file
-69.00 -25.50 BC UTC: 16/04/2017 11:36:03.3 Lat: -23.24 Lon: -69.59 Mw: 3.9 MI: 3.9
EOF
gmt psxy $R $J $B -O /home/seismo/RTWEB/map/GMT_EPI0.txt -Wfaint -i6,7,10,9s0.2 -h0 -Sc -
C/home/seismo/rtnew/rtgmt/quakes.cpt -K >> $file
gmt psxy $R $J $B -O /home/seismo/RTWEB/map/GMT_LAST_LOC.txt -Wfaint -i6,7,10,9s0.2 -h0 -Sac -
C/home/seismo/rtnew/rtgmt/quakes.cpt >> $file
```

```

outeps=`echo $file | sed 's/ps/eps/g'`
eps2eps $file $outeps
gmt psconvert $outeps -Tj -P
gv $file

```

## Provincia de Antofagasta, II Region de Antofagasta, Chile

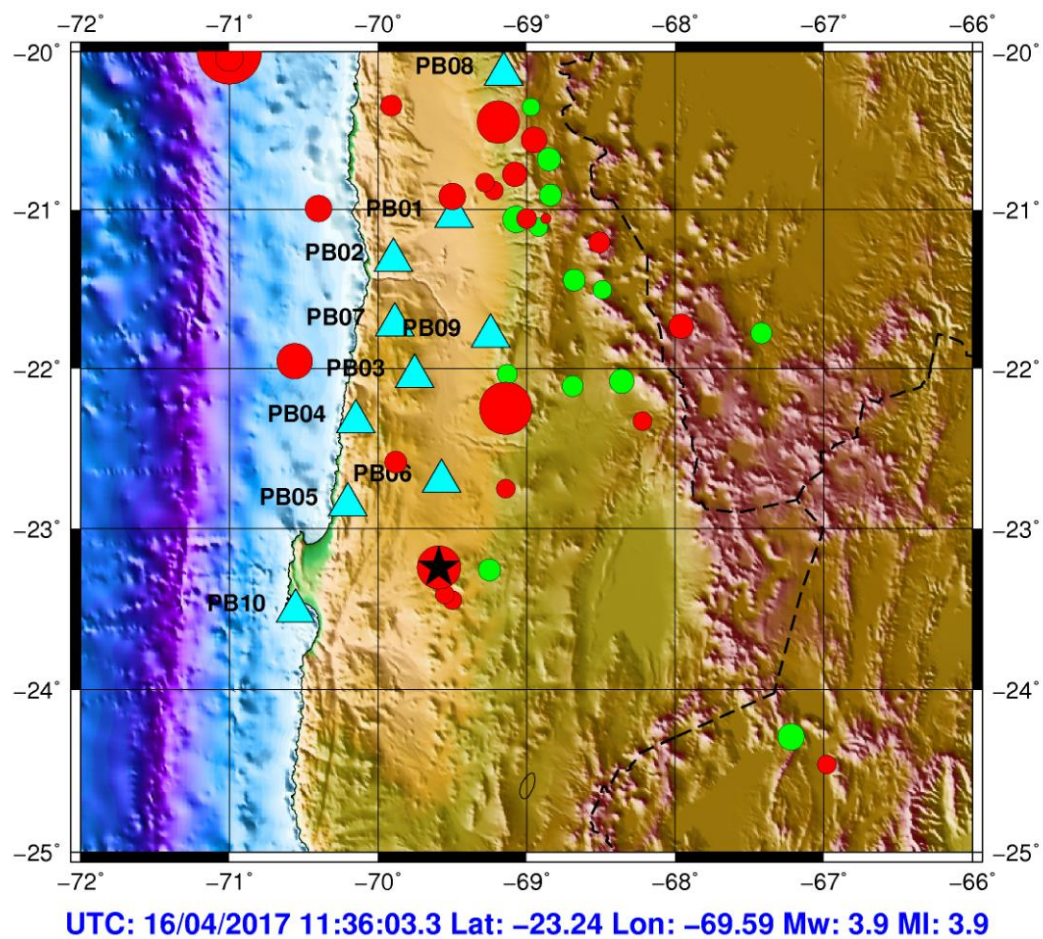




**rtgmt -tt "Chile No locations" -epi**

Here there are stations in the station file and locations in the GMT\_EPI0.txt file, but the `-epi` indicates that we want a map with no locations.

## Chile No locations

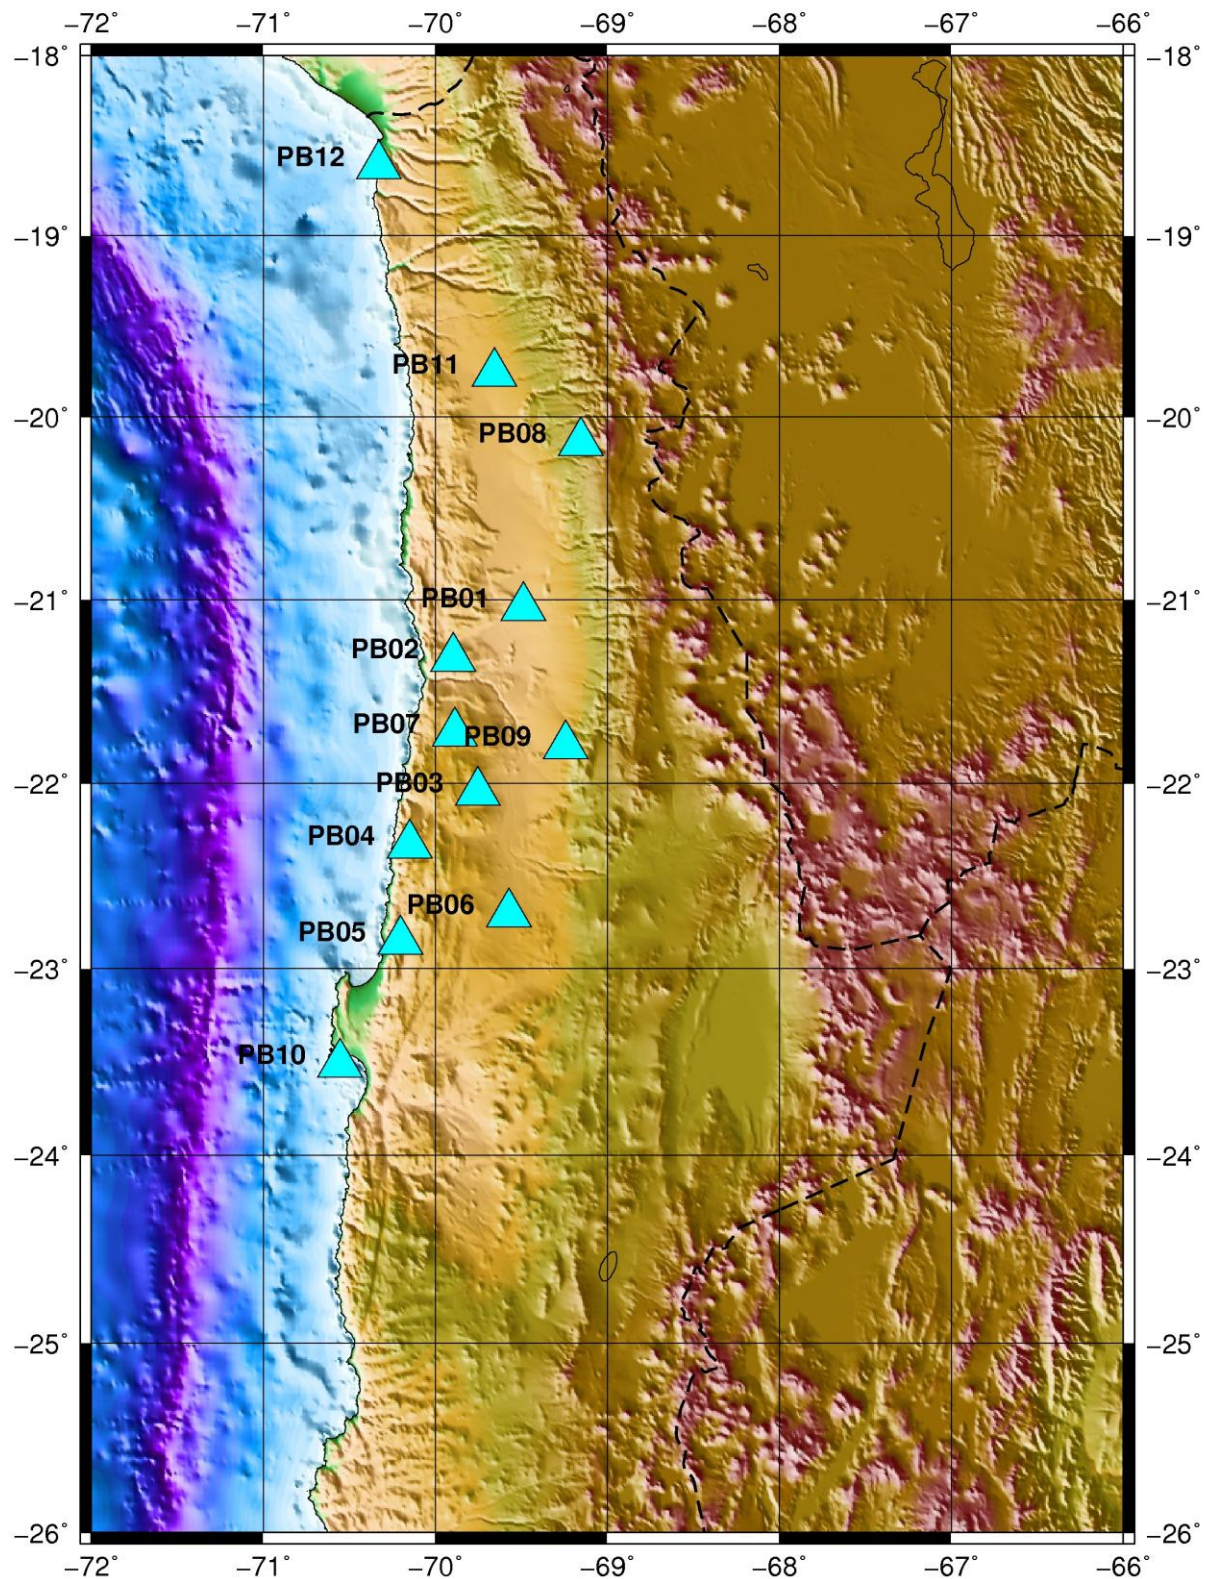




**rtgmt -tt "Chile No locations No Stations" -epi -stat**

Here there are stations in the station file and locations in the GMT\_EPI0.txt file, but the `-epi` and `-stat` indicates that we want a map with no locations and no stations.

## Chile No locations No stations

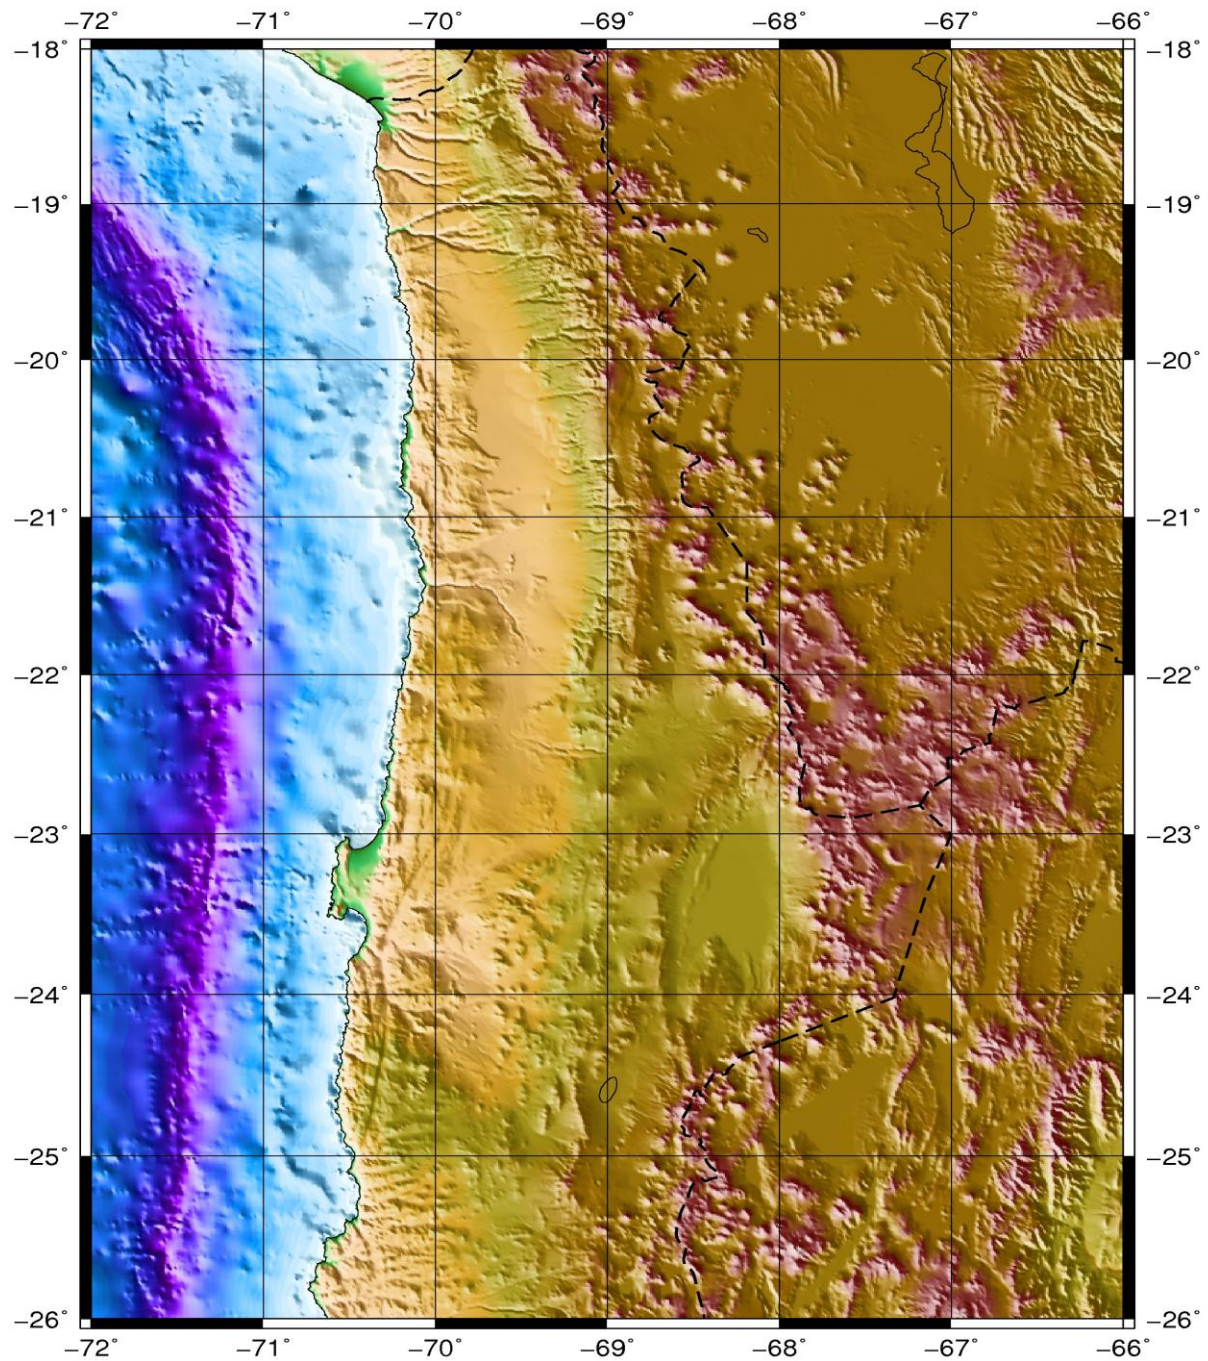




**rtgmt -tt "Dominican Republic" -co "-76 -67 17 22"**

Here some of the stations are found in the current station file and plotted on the map, but no locations in the current GMT\_EPI0.txt file.


## Dominican Republic

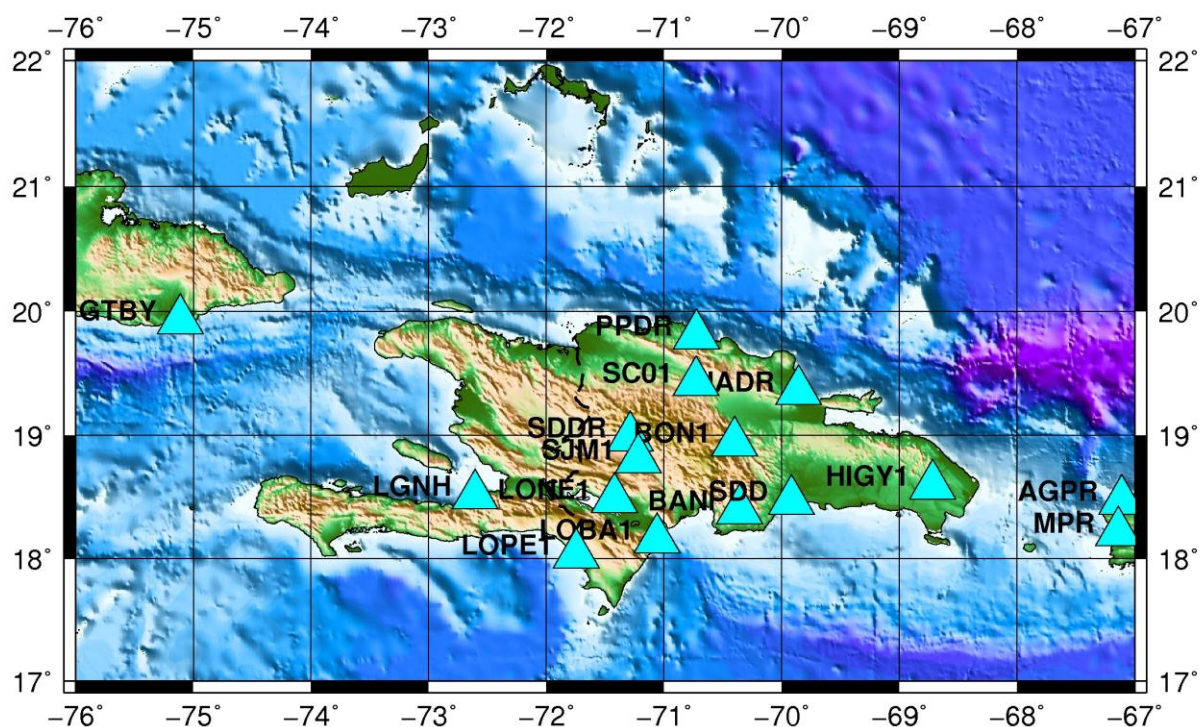

**rtgmt -tt "Panama" -co "-84 -75 7 11"**

Here no stations found in the station file and no locations in the GMT\_EPI0.txt file.

## Panama

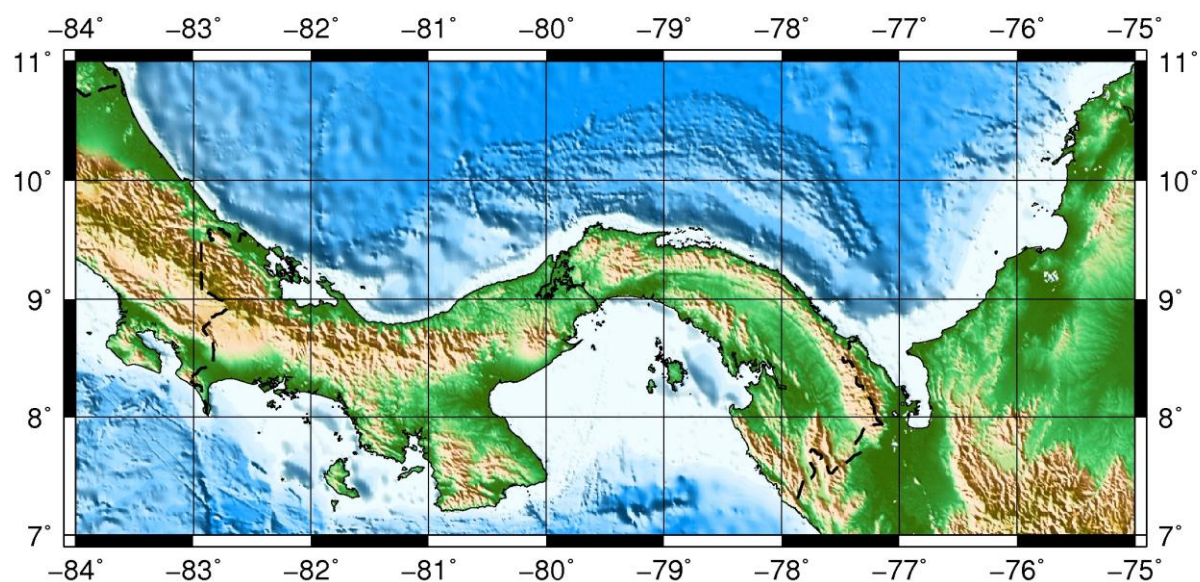

## 22 Helicorder plots

Four program modules are available for the user to create helicorder plots for different use: rt24, rtdr24, rtdrum and rthplt.

The four modules are used to create helicorder plots of unfiltered and filtered waveform data from a SeedLink server. The modules can be used independently of the RTQUAKE real-time detection system running or not, but a complete installation and configuration of RTQUAKE must be done to have the correct environment setup.

As part of the installation a directory structure is created under the RTQUAKE top directory:

/home/seismo/mydir/rtq_web/tmp	unfiltered data
/home/seismo/mydir/rtq_web/tmp_filt	filtered data
/home/seismo/mydir/rtq_web/png	plot unfiltered data
/home/seismo/mydir/rtq_web/png_filt	plot filtered data

Two parameter files are used as input, and they must be stored in /home/seismo/mydir/par catalogue under the catalogue for your setup. For the demo example under the catalogue ../par/DEMO1.

### streams\_heli

The streams\_heli file is standard SeedLink input format where CX is the network name, PB0n is the station name and BHZ the component.

```
CX PB01 BHZ
CX PB02 BHZ
CX PB03 BHZ
CX PB04 BHZ
CX PB05 BHZ
CX PB06 BHZ
CX PB07 BHZ
CX PB08 BHZ
CX PB09 BHZ
CX PB10 BHZ
CX PB11 BHZ
CX PB12 BHZ
```

### stations\_heli

The format of this file:

PB01	station name
00	location
0.0100	gain for the unfiltered data, can be modified dynamically
0.0300	gain for the filtered data, can be modified dynamically
2.0	low-pass frequency
8.0	high-pass frequency
Huatacondo	name of station, geographical name

```
PB01_00BHZ 0.0100 0.0300 2.0 8.0 Huatacondo
```

```

PB02_00BHZ 0.0100 0.0300 2.0 8.0 Salar Grande
PB03_00BHZ 0.0100 0.0300 2.0 8.0 El Tigre
PB04_00BHZ 0.0100 0.0300 2.0 8.0 Mantos de la Luna
PB05_00BHZ 0.0100 0.0300 2.0 8.0 Michilla
PB06_00BHZ 0.0100 0.0300 2.0 8.0 Pedro de Valdivia
PB07_00BHZ 0.0100 0.0300 2.0 8.0 Cerro Tatas
PB08_00BHZ 0.0100 0.0300 2.0 8.0 Macaya
PB09_00BHZ 0.0100 0.0300 2.0 8.0 Quillagua
PB10_00BHZ 0.0100 0.0300 2.0 8.0 Juan Lopez
PB11_00BHZ 0.0100 0.0300 2.0 8.0 Quebrada Aricilda
PB12_00BHZ 0.0100 0.0300 2.0 8.0 Cerro Caramaca

```

RT24 is the main module that will call the other three modules according to the arguments in the call.

```
$ rt24 -h
```

Usage: rt24 [options] [host][:port]

```

-h                show this usage message
-to_wi  pixels    total width in pixels
-fr_hg  pixels    total frame height in pixels
-logol           name of left side logo (gif file)
-logor           name of right side logo (jpg file)
-heli    n        0-One helicorder plot showing last 24 hours.
                  1-One helicorder plot per day.
                  (default 1). See manual for how to use.
-mt    n          minutes across frame
-col    n          color scheme (0,1,2,3,4,5)
-top    text       top directory (default: /home/seismo)

```

## Data stream selection and station file##

```

-l listfile  read a stream list from this file (streams_heli)
-f stationfile read a station list from this file (stations_heli)

```

```

[host][:port]  Address of the SeedLink server in host:port format
               f.ex.: 129.177.xx.yy:18000
               f.ex.: localhost:18000

```

Two aliases are set up in the distribution to be used for the example parameters in `./par/DEMO1`. Two of the arguments to `rt24` differ, the `-heli` and the `-col`, explained below.

**alias rtheli1='\$SRTQUAKE\_TOP/com/rtquake\_heli\_tst1**

where `rtquake_heli_tst1` is set up as shown below (can be modified by user):

```

rt24 -heli 1 -logol logo_left_def.gif -logor logo_right_def.jpg -col 5 -to_wi 1200 -fr_hg 600 -mt 15 -l
DEMO1/streams_heli -f DEMO1/stations_heli 139.17.3.177

```

The argument **-heli 1** will produce 24 hour helicorder plots of each specified component for the last x number of days specified in the `./com/rtquake.par` parameter file. The `index.html` and `indexflt.html` are created in the `./rtq_web/png` and `./rtq_web/pngflt` catalogue respectively and will create the menu page shown in Figure 22.1. The argument **-col 5** will give the colour scheme as shown in Figure 22.2.

**alias rtheli2='\$SRTQUAKE\_TOP/com/rtquake\_heli\_tst2**

where `rtquake_heli_tst2` is set up as shown below (can be modified by user):

```
rt24 -heli 0 -logol logo_left_def.gif -logor logo_right_def.jpg -col 0 -to_wi 1200 -fr_hg 600 -mt 15 -l DEMO1/streams_heli -f DEMO1/stations_heli 139.17.3.177
```

The argument `-heli 0` will produce one helicorder plot of each specified component, but only one per station for the last 24 hours. The argument `-col 0` will give the colour scheme as shown in Figure 22.3. The plots can be shown as a “slide-show”, switching station automatically every 10-15 seconds. Enter the following address in your browser: `/mydir/rtq_web/heli/slide_tst.html`.

`rt24` calls `rt24r` at regular intervals to make the helicorder plots based on the continuous files generated by `rt24`.

`rthplt` is called by `rt24` at regular intervals to generate an `index.html` file in the `mydir/rtq_web/png` and `mydir/rtq_web/png_fit` catalogues. Loading the `index.html` files from a browser will give you the menu shown in Figure 22.1. The `index.html` menu file that is generated is practically the same as you find in the Earthworm system, while the helicorder plots are slightly different.

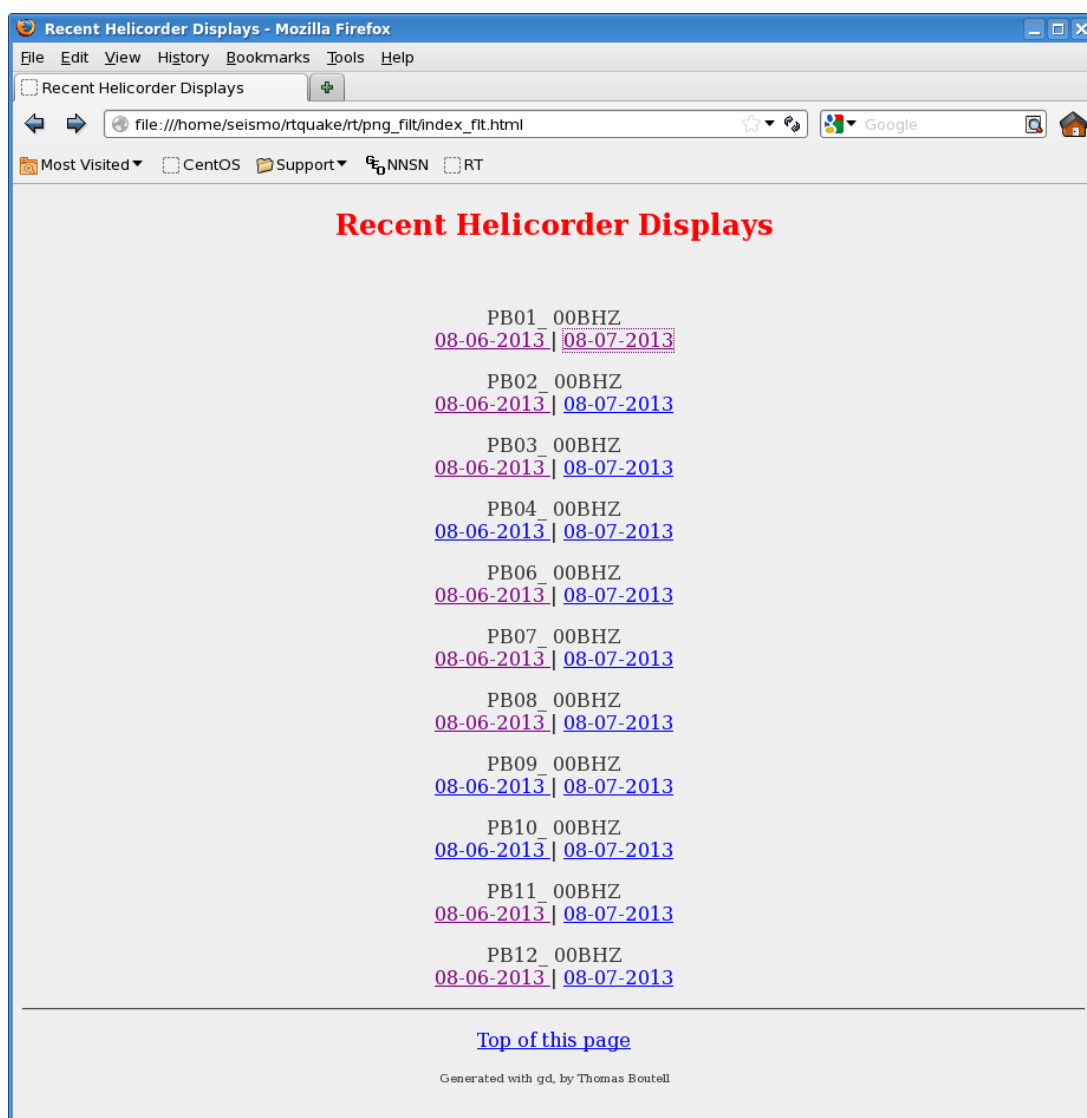


Figure 22.1 Menu helicorder plots



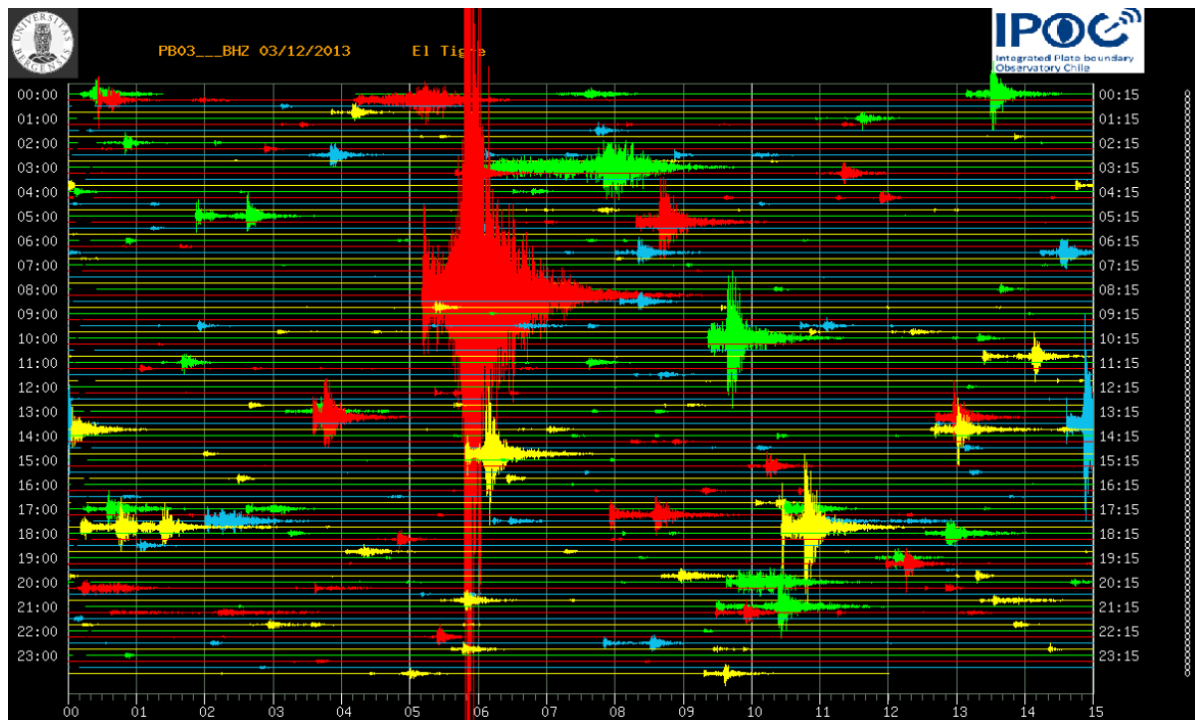


Figure 22.2 Helicorder plot

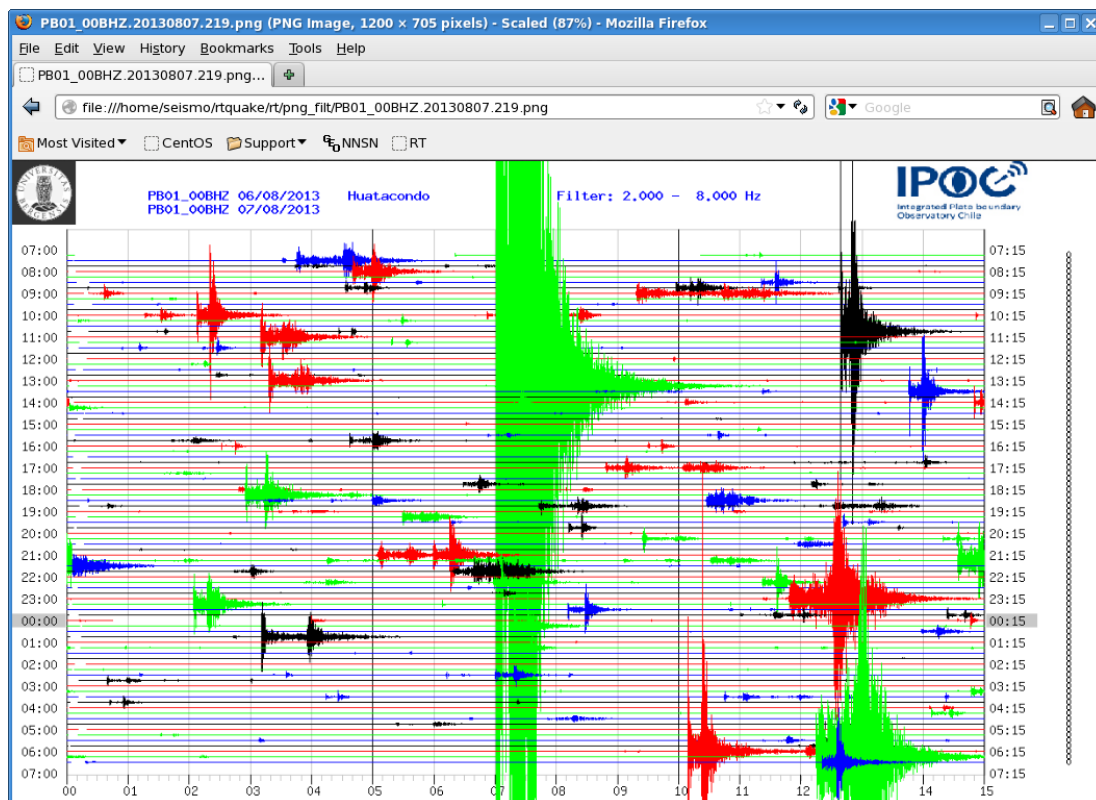


Figure 22.3 Helicorder plot

## 23 Show new locations dynamically in Google Earth


A location file called ALL\_LOC.txt is generated in /home/seismo/mydir/rtq\_web/map. New locations are added as new auto locations are computed. This can be monitored dynamically with Google Earth. See Figure 23.1 below.

Every time a new event is located, the yellow marker is moved to the new location and previous locations are still visible. The Google Earth map is programmed to move in what is called “fly mode”, which gives a smooth movement of the map to the new location.

How to set up:

Google Earth must be installed.

A program **rtgeepi** that is part of the RTQUAKE distribution must run in the background (can be started as a cron job). This program continuously monitors the ALL\_LOC.txt file to check for the last location. A temporary file /home/seismo/mydir/rtq\_web/map/temp.epi.kml is generated and then copied to /home/seismo/mydir/rtq\_web/map/ge\_epi.kml. When Google Earth is started the file /home/seismo/mydir/rtq\_web/map/rtge\_refresh.kml should be opened from Google Earth. This file will read the ge\_epi.kml file every 10 seconds and update the map. When a new location is added, the centre of the map will move to this location. Old locations in ALL\_LOC.txt will also be plotted on the map. The **rtgeepi** must run at all the time to keep the last location up to date. The ALL\_LOC.txt will after some time contain a lot of triggers and the map may look a bit unclear. It is recommended to clean up the file by removing the oldest triggers.

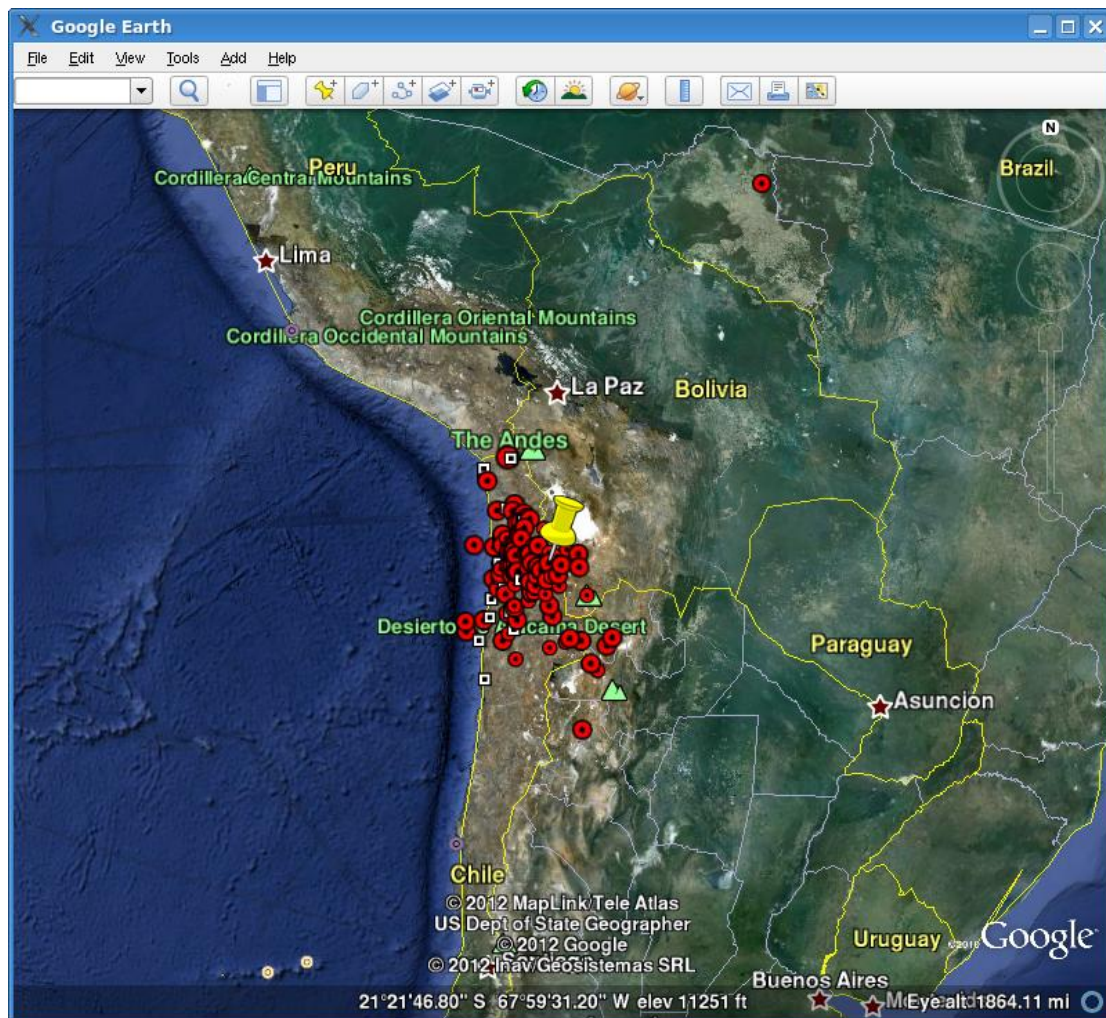

**Figure 23.1** Auto location map using Google Earth, refresh every 10 seconds.

## 24 TYPICAL SEQUENCE DURING AN EVENT DETECTION

Below is a typical sequence of what happens during an event detection and location. Some console output is also included to give a better understanding of how RTQUAKE works.

RTQUAKE is started as normal with the DEMO1 parameters and the rtquake.par parameter file as shown below:

This file is parameter file for rtquake.  
Only the lines with recognized keyword under KEYWORD will be read.  
The comments have no importance.  
Columns Par 1-Par 2 start in columns 41,51.

keep	locate	Action
-1	0/1	A new s-file is created with no phase-picks. No location. This option is used for RTQUAKE: detection + no picks + no location
0	0/1	A new s-file is created with the detection phase-picks only. No location.
1	0	A new s-file is created with all phase-picks from FilterPicker. No location. This option is used for RTQUAKE: detection + NO location
1	1	A new s-file is created with all phase-picks from FilterPicker. Automatic location. Phases causing high residuals will be removed Automatically until MAX RESIDUAL (see below) and MINSTALOC (see below) Is reached. The s-file will contain the location and the phase-picks That are left. This option is used for RTQUAKE: detection + autoloc.

All keywords in capital letters.

```

KEYWORD.....Comments.....Par 1.....Par 2
-----how to record s-files-----
KEEP          1:sfile,-1:no sfile  1
-----automatic location or not-----
LOCATION        1:Locate,0:No Locate 1
-----geographical name of location or not-----
GEOLOCATION     1:yes, 0:no          1
-----detail level of geographical name of location-----
GEODETAIL     6-10                  7
-----automatic local magnitude or not-----
AUTOMAG       1 compute Ml,Mw       1
-----name of SEISAN database-----
DBASENAME     For SEISAN            TST
-----SEISAN catalogue for waveforms-----
WAVEDIR       For SEISAN            WAV
-----store waveforms in database or not-----
WAVE_DB_ACTIVE For SEISAN            1
-----max number of iterations discarding phases-----
ITERATION     Number of iterations 100.0
-----maximum acceptable residual to do location-----
MAX_RESIDUAL  Maximum residual      2.0
-----min. no of stations with phase reading to do location-----
MINSTALOC     Min stat to locate     5
-----separate sub networks or all as one-----
ALLSUBNETS    0-sep.net >0 one net  0
-----p-phases and s-phases or p-phases only-----
PHASES        0-p, 1-p+s            1
-----minimum seconds time-difference s-p-----
MINDIFF_SP    For phase-picking      1.5
-----mail or not-----
MAIL1         0-no mail,1-mail       0      terjeu@hotmail.com
MAIL2         0-no mail,1-mail       0      abcd@online.no
MAIL3         0-no mail,1-mail       0      whatever@mail.com
MAIL4         0-no mail,1-mail       0      any@mail.com
MAIL5         0-no mail,1 mail       0      to_you@yahoo.com
  
```

```

-----total delay buffer trigger-----
DELAY_BUFFER      Minutes delaybuffer 20.0
-----where to set current time in delay buffer-----
MINUT_NOW         Minut current data 17.0
-----delay for trigger window-----
DET_DELAY         Detection delay 7.0
-----array-propagation-window-----
APW               Array prop. window 120.0
-----seconds to shuffle buffer don't change-----
SECONDS2SHUFLE    Seconds to shift 4.0
-----pre-event in seconds-----
PRE_EVENT         Pre-event (seconds) 60.0
-----post-event in seconds-----
POST_EVENT        Post-event (seconds) 60.0
-----no of days to save heliplots-----
HELI_DAYS         No of days to save 5.0
-----filterpicker don't change-----
FILTERWINDOW      FilterPicker 300.0
LTWINDOW          FilterPicker 500.0
THRESHOLD1        FilterPicker 10.0
THRESHOLD2        FilterPicker 10.0
TUPEVENT          FilterPicker 20.0
-----sound on or off when trigger-----
SOUND             1-sound, 0-nosound 1.0
-----printing or not-----
PRINTING          Debug printing 0
*****
* Parameters for preliminary autolocation based on "close-to-real-time" phase picks *
*****
-----auto location based on p-phase picking in real-time-----
REALTIME_PICK     0-no, 1-yes 1
-----max. residual to do loc. based on real-time phases-----
MAX_RES_PPH       Max residual rt 2.0
-----min. stations with phase reading for realtime loc.-----
MINSTALOCPPH     min. no. stations 6
-----accept p-phases in time-window: current time - seconds-----
TIMEWINDOW        seconds back in time 70
-----p-phases and s-phases or p-phases only real-time picks-----
RTPHASES          0-p, 1-p+s 1


```

Note that the parameters LOCATION, GEOLOCATION, AUTOMAG and REALTIME\_PICK are all set to 1 (active). It means that when an event occurs, the system will try to make an automatic location and magnitude based on real-time phases picked on data just after arrival from the SeedLink system. In the case of a successful location the system will also try to give an approximate geographical name of the epicenter. This process is normally finished within 1 minute after the first phases are found.

When the event has been recorded in the SEISAN database with the corresponding s-file the system will read the event, look for p and s phases and try to do a new location. If successful the magnitude will be computed. Also in this case the system will try to give an approximate geographical name of the epicenter. Depending on the post-event that has been specified, this process will finish several minutes after the detection takes place.

Below some graphics and printouts that are produced during this process with some comments attached.

RTQUAKE started and the RTDLY shows the graphic below:

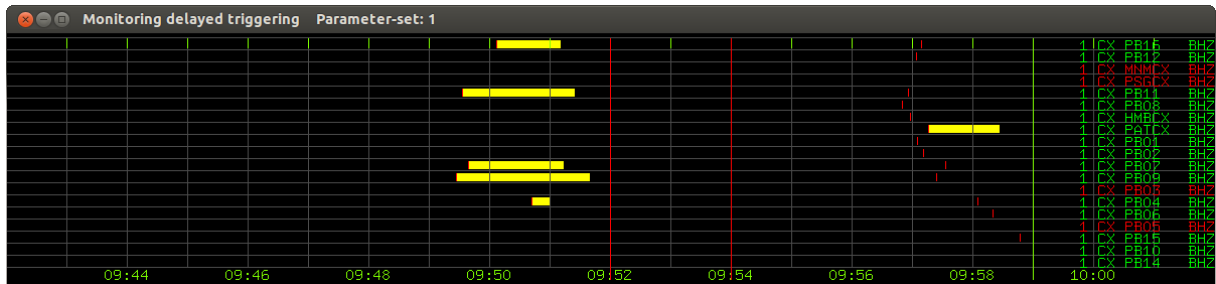

**Figure 24.1 RTDLY plot**

As can be seen at around time 09:57-09:59 several triggers are indicated by the red vertical lines. The system are continuously searching for phases on new data received from the SeedLink server. Around the triggers indicated in the figure, several phases are found and the system will try to locate.


The program **rtloc** was also started initially and when there are new locations, the map is updated dynamically. So when new phases are added, new locations will be computed and one can see the epicenter is moving slightly after each new computation. As can be seen on the graphics the text says that this is "Real-time" and there is a UTC time and a preliminary latitude, longitude and MW.



**Figure 24.2 RTLOC plot**



Different graphics are produced during this stage of the detection. Figure 24.3 below shows the preliminary location and a listing of the s-file. As can be seen in the header of the map the geographical name of the location is included. Both maps are updated dynamically when new real time locations are produced.

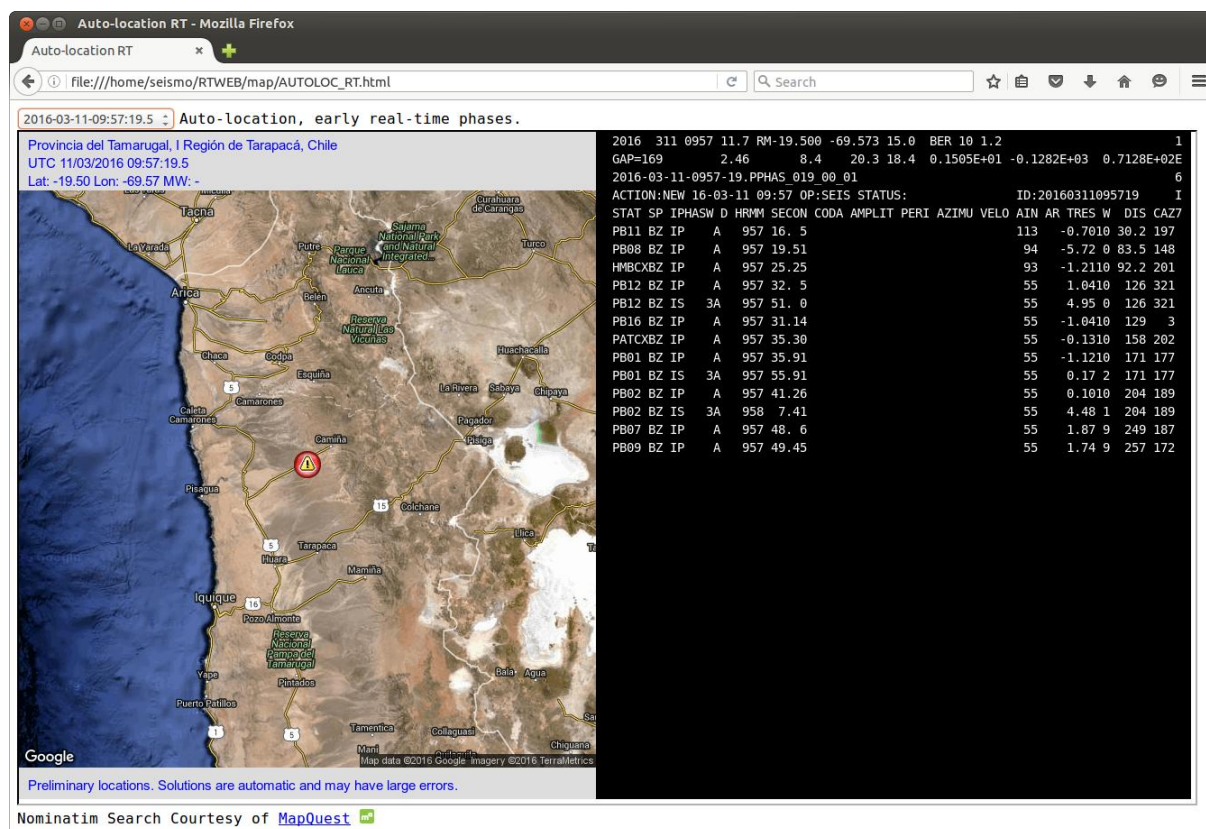

**Figure 24.3 AUTOLOC\_RT.html**

After some minutes when the triggers enter the array propagation, (see Figure 24.1) a network trigger is declared and the complete waveform will be extracted from the SeedLink server. The waveform is stored in the SEISAN database. As we have the auto-location activated, RTQUAKE will process the recorded waveform for new phases and try to compute a new location and magnitude. This process is explained in Chapter 11. Now maps and graphics are updated again, but will now contain results from automatic processing of the complete waveform.


The routine rtloc will update the location and magnitudes based on the processing of the complete waveform. In the header of the map made by rtloc the title is now "Recorded event". The UTC time is the same as before, but the location and magnitude are slightly adjusted compared to the real-time solution. In addition a ML has been computed.



**Figure 24.4 RTLOC**


The figure below shows the results of the automatic post-processing of the event with the same information as above.



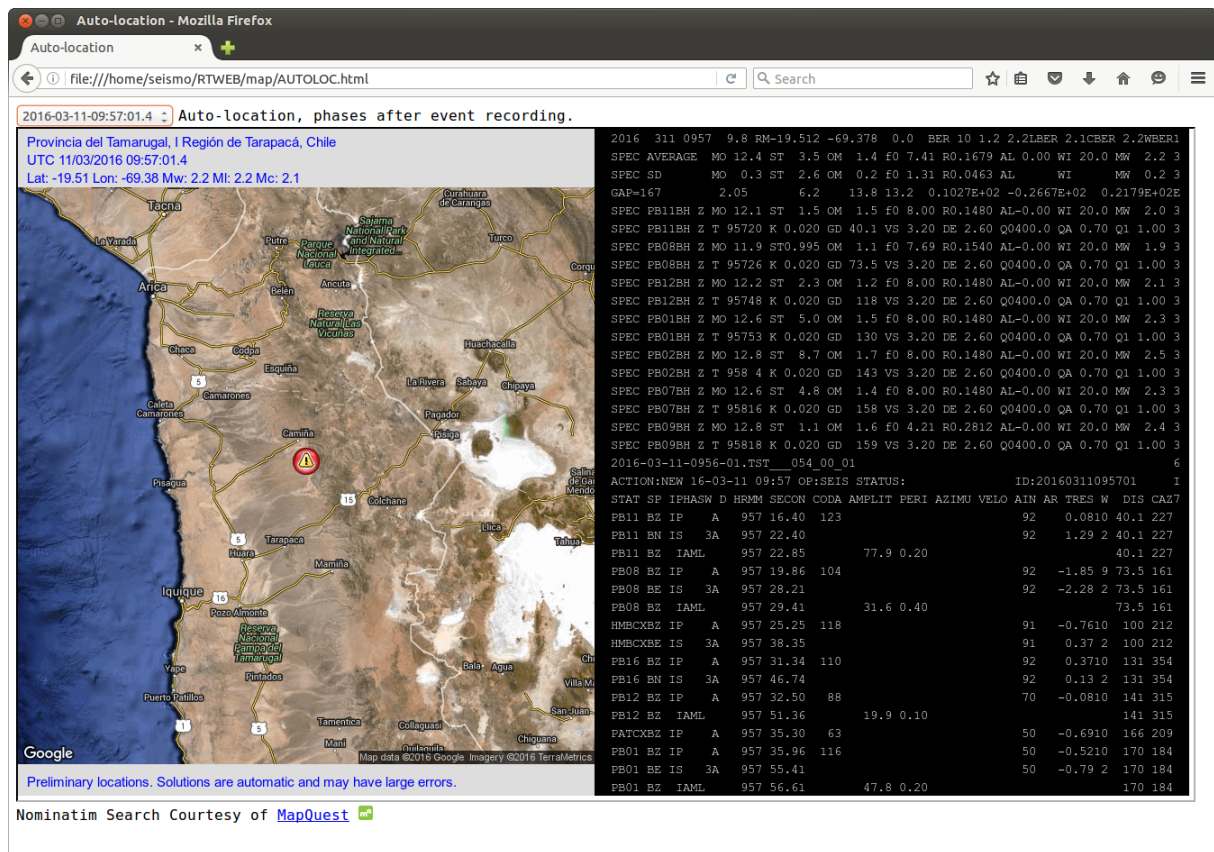

**Figure 24.5 AUTOLOC.html**

Another map that can be used to show the results of the automatic processing is shown below. The information is more or less the same, but the stations in the network are marked on the map.

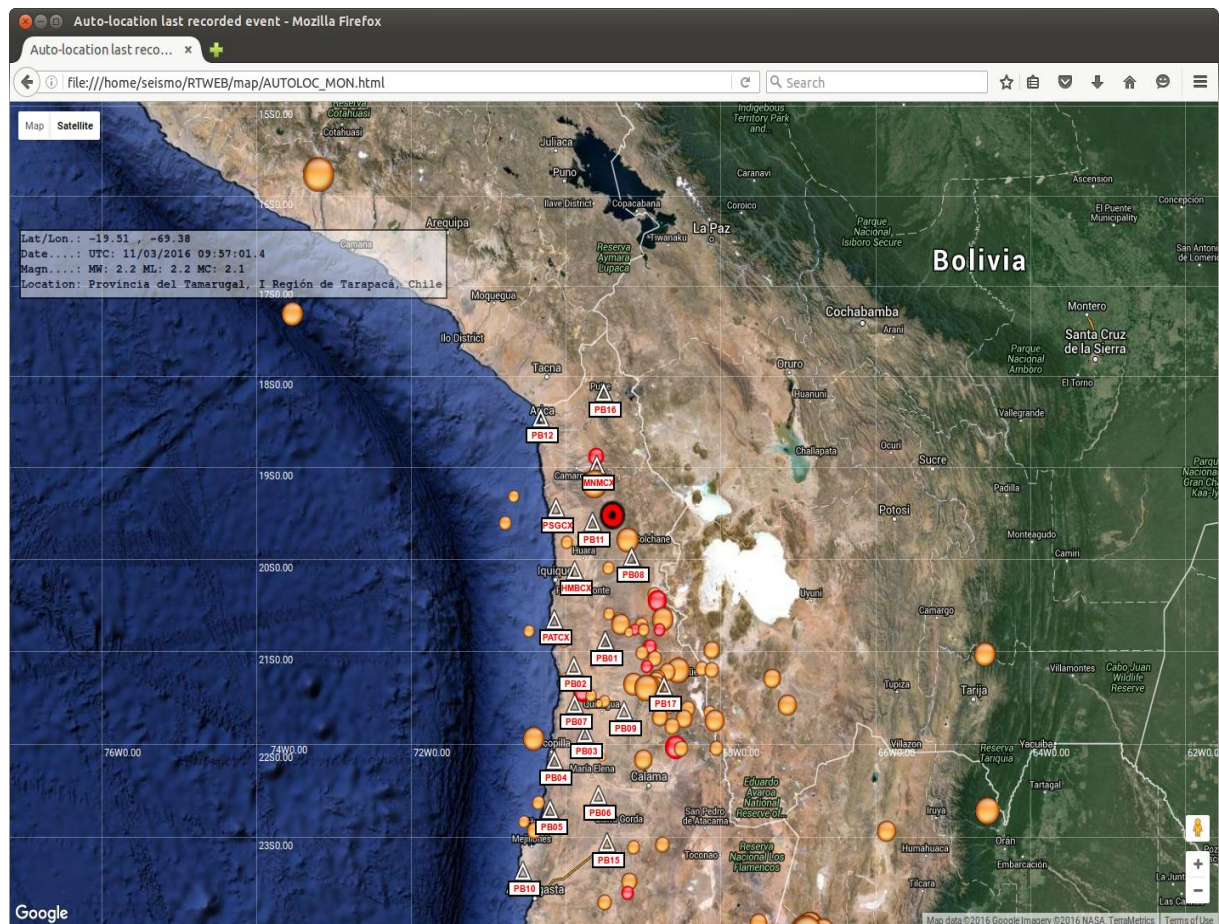

**Figure 24.6** AUTOLOC\_MON.html

The webpage below shows the automatic location of the event, the s-file and the residuals of the phase readings. A simple plot of the signals with the phases is also shown.


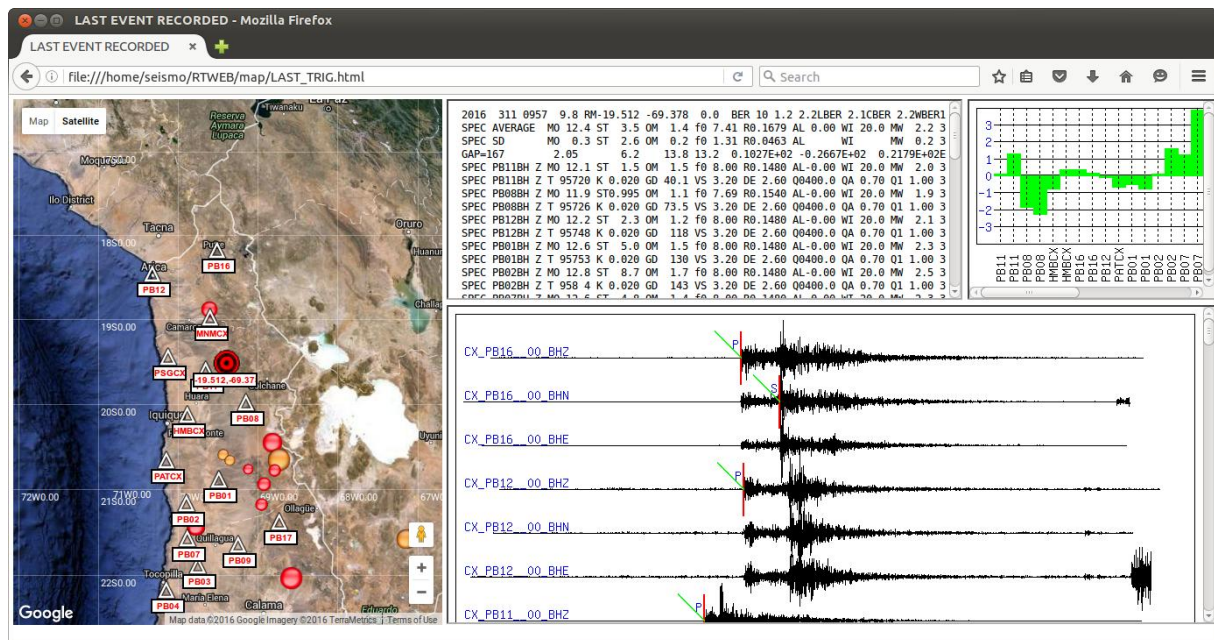


Figure 24.7 LAST\_TRIG.html


The real time picks and location are based on a small time window of the signals entering RTQUAKE in real time. When the number of picks complies with the parameters in `rtquake.par`, the current data in the time window is recorded in the SEISAN database WAV/PPHAS with the corresponding s-file in REA/PPHAS. The data can be treated with `eev` and `mulplt` as normal detections, but the length of the signal will be very short. The plot below shows the real time recording with picks from the event in the example and the other the preliminary location and a listing of the s-file. The total time is around 120 seconds.

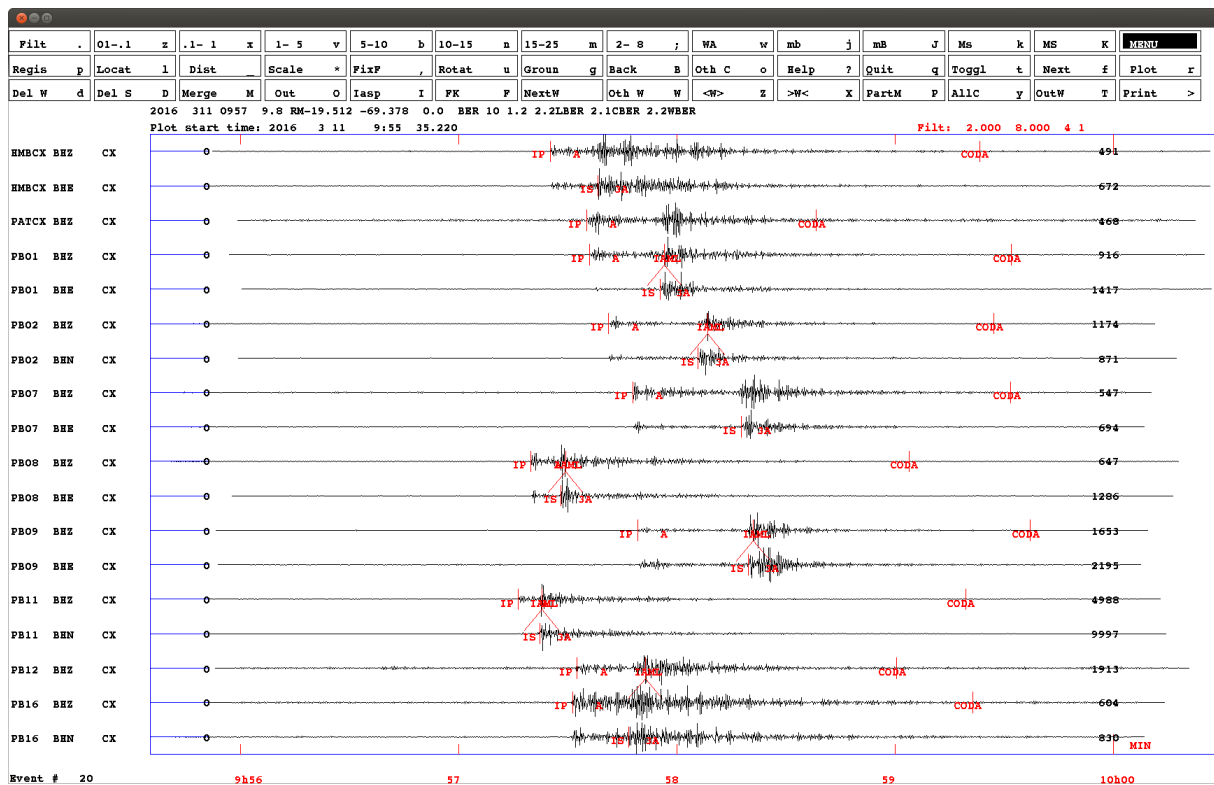

**Figure 24.9 MULPLT**

After the event has been recorded with the complete post-event and processed automatically it can be plotted and analysed as a normal event by the operator. Automatic readings can be removed and manual readings inserted. The plot below shows the recorded event in the example automatically processed. The time window now is 7-8 minutes.



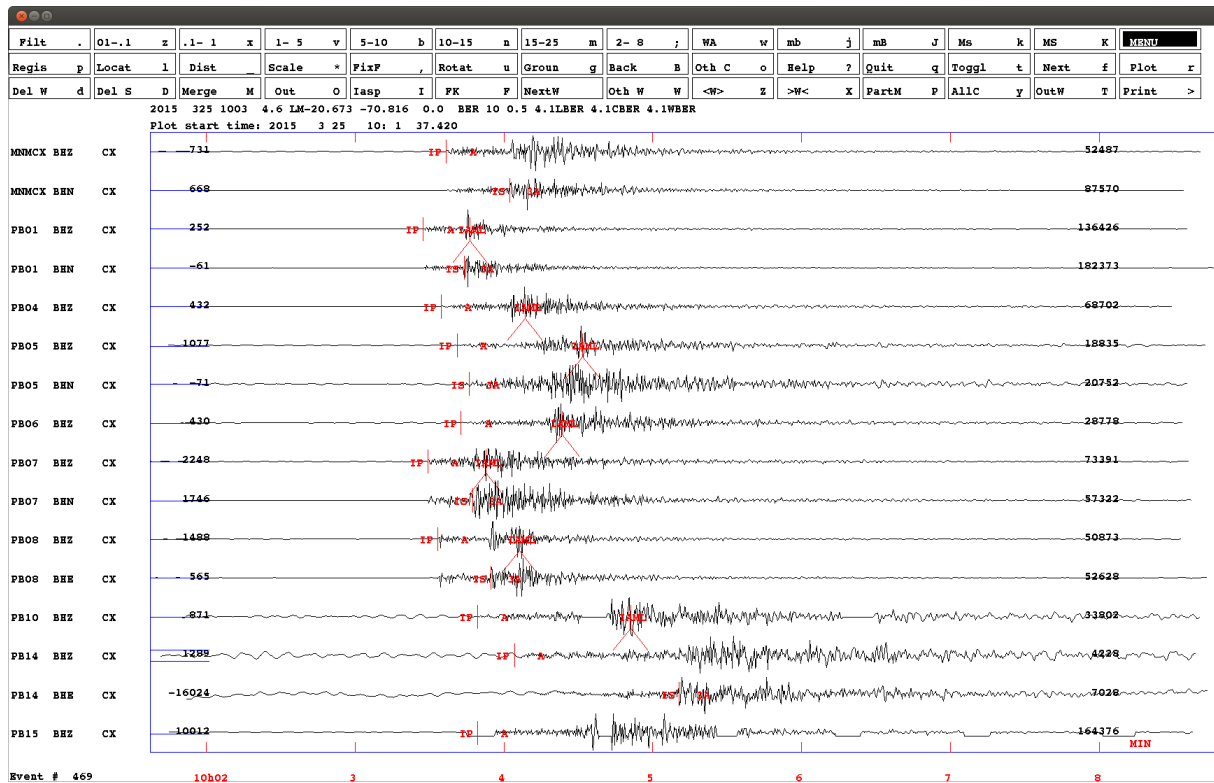

**Figure 24.10 MULPLT**

Below follows part of the printout on the console during the detection of the event in the example. Some explanation has been added in **bold letters**.

**Looking at the RDLY plot on top in this example sequence we can see that some triggers have been detected. Several phases are determined. In this more phases than specified in the parameter file (11) and a real time detection is declared:**

```
FPICK: AN EVENT IS DETECTED !! 45
FPICKS: 0 3666765439.5      3.5
FPICKS: 1 3666765445.2      9.2
FPICKS: 2 3666765452.0     16.0
FPICKS: 3 3666765455.9     19.9
FPICKS: 4 3666765451.1     15.1
FPICKS: 11 3666765436.0      0.0
FPICK: pidx: 11
```

**Find the minimum time of the phase readings, create the waveform filename and the corresponding s-file name**

```
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
CREATE_Sfile_P: Time to make Sfile.: 11/03/16 09:57:16.050
Create_Sfile_P: S-filename.....: 11-0957-16R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03
Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
RTDET: S_REC_P.....: 2016 311 957 16.0
In S_REC_P: FILENAME: 2016-03-11-0957-16.PPHAS_019_00_01
1 CX PB08 BHZ 3666765439.5 11/03/16 09:57:19.519 0
```

```

1 CX HMBCX BHZ 3666765445.2 11/03/16 09:57:25.250 0
1 CX PB12 BHZ 3666765452.0 11/03/16 09:57:32.050 0
1 CX PB01 BHZ 3666765455.9 11/03/16 09:57:35.919 0
1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
1 CX PB11 BHZ -1.0 11/03/16 09:49:49.750 0

```

## Create the s-file and write the waveform file from the short timewindow (around 120 seconds)

```

Create_Sfile_P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
16R.S201603_hyp_save.out
Start WRITE_RTPHASE thread !
WRITE_RTPHASE thread started. Return 0
*****
                WRITE DATA BUFFER
S_FILE:  /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
W_FILE:  2016-03-11-0957-16.PPHAS_019_00_01
SUBNET:  1 CHANNEL:  0 to 19
*****
RTPPH:.....: MINTRGTID: 11/03/201609:57:16.0
RTPPH:.....: TRG TID: 2016-03-11-09:57:16.0
READ_PACKETS...:Trigger CH: 0-> 0 ant: 375 MxAmp: 362.0 nlev: 3.1 sta: 68.1 lta:
2.9 rat: 23.6 3666765451.4 PB16 BHZ
RTPPH: Found.....: hyp.out

```

Start the iteration process explained in chapter 11 to get the rms residual below the value set in the parameter file and still have enough components with phase readings left for location. In the example, this is repeated 3 times in the example as new phases from the event are entering the defined time window. The average residual changes and also the location.

```

RTPPH: readings left.....: 6 Avg.res: 77.862
RTPPH: readings left.....: 5 Avg.res: 0.348
RTPPH: Average residual.....: 0.348000
RTPPH: No more iterations.....: Number of stations: 5 Avg: res.: 0.348
RTPPH: Too few stations (<6).....: No location
*****
*****
* FPICK: Detection SUBNET: 1 kan: 7 CX PATCX BHZ BUFFER_TIME: 2016 71 9:57:27.3500
TRG TIME: 2016/ 3/11 9:57:35.30 *
*****
*****
FPICKS: P_PHASE: 7 STAT DIG CMP ? P0_ ? 20160311 0957 35.3000 GAU 1.500e-01
0.000e+00 2.048e+01 5.000e-02
FPICKS: First free is index subnetno 1: 5
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765398.0 TRG: 3666765439.5 TNOW:
3666765468.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765398.0 TRG: 3666765445.2 TNOW:
3666765468.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765398.0 TRG: 3666765452.0 TNOW:
3666765468.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765398.0 TRG: 3666765455.9 TNOW:
3666765468.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765398.0 TRG: 3666765451.1 TNOW:
3666765468.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765398.0 TRG: 3666765455.3 TNOW:
3666765468.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765398.0 TRG: 3666765436.0 TNOW:
3666765468.0 11/03/16 09:57:16.050
FPICKS: Phasepics subnet 1: 7
FPICK: AN EVENT IS DETECTED !! 46
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 11 3666765436.0 0.0
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
CREATE_Sfile_P: Time to make Sfile.: 11/03/16 09:57:16.050
Create_Sfile_P: S-filename.....: 11-0957-16R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03

```

```

Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
RTDET: S_REC_P.....: 2016 311 957 16.0
In S_REC_P: FILENAME: 2016-03-11-0957-16.PPHAS_019_00_01
  1 CX PB08 BHZ 3666765439.5 11/03/16 09:57:19.519 0
  1 CX HMBCX BHZ 3666765445.2 11/03/16 09:57:25.250 0
  1 CX PB12 BHZ 3666765452.0 11/03/16 09:57:32.050 0
  1 CX PB01 BHZ 3666765455.9 11/03/16 09:57:35.919 0
  1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
  1 CX PATCX BHZ 3666765455.3 11/03/16 09:57:35.300 0
  1 CX PB02 BHZ -1.0 11/03/16 09:50:01.119 0
Create_Sfile_P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
16R.S201603_hyp_save.out
Start WRITE RTPHASE thread !
WRITE RTPHASE thread started. Return 0
*****
                WRITE DATA BUFFER
      S_FILE: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
      W_FILE: 2016-03-11-0957-16.PPHAS_019_00_01
      SUBNET: 1 CHANNEL: 0 to 19
*****
RTPPH:.....: MINTRTID: 11/03/201609:57:16.0
RTPPH:.....: TRG_TID: 2016-03-11-09:57:16.0
READ_PACKETS...:Trigger CH: 7-> 7 ant: 360 MxAmp: 412.5 nlev: 6.8 sta: 50.9 lta:
6.2 rat: 8.2 3666765456.7 PATCX BHZ
RTPPH: Found.....: hyp.out
RTPPH: readings left.....: 7 Avg.res: 66.143
RTPPH: readings left.....: 6 Avg.res: 0.315
RTPPH: Average residual.....: 0.315000
RTPPH: No more iterations.....: Number of stations: 6 Avg: res.: 0.315
UTC: 11/03/2016 09:57:16.0 | Lat: | -19.55 | Lon: | -69.32 | Mw: | - | Ml: | - | Mc: | - |
Provincia del Tamarugal, I Region de Tarapaca, Chile

RTPPH: UTC: 11/03/2016 09:57:16.0 Lat: -19.55 Lon: -69.32 Provincia del Tamarugal, I Region de
Tarapaca, Chile
*****
* FPICK: Detection SUBNET: 1 kan:11 CX PB09 BHZ BUFFER_TIME: 2016 71 9:57:35.7500
TRG TIME: 2016/ 3/11 9:57:49.45 *
*****
*****
FPICKS: P_PHASE: 11 STAT DIG CMP ? P0_ ? 20160311 0957 49.4500 GAU 5.000e-02
0.000e+00 1.189e+01 5.000e-02
FPICKS: First free is index subnetno 1: 6
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765408.0 TRG: 3666765439.5 TNOW:
3666765478.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765408.0 TRG: 3666765445.2 TNOW:
3666765478.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765408.0 TRG: 3666765452.0 TNOW:
3666765478.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765408.0 TRG: 3666765455.9 TNOW:
3666765478.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765408.0 TRG: 3666765451.1 TNOW:
3666765478.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765408.0 TRG: 3666765455.3 TNOW:
3666765478.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09 BHZ TBEF:3666765408.0 TRG: 3666765469.5 TNOW:
3666765478.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765408.0 TRG: 3666765436.0 TNOW:
3666765478.0 11/03/16 09:57:16.050
FPICKS: Phasepics subnet 1: 8
FPICK: AN EVENT IS DETECTED !! 47
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 6 3666765469.5 33.4
FPICKS: 11 3666765436.0 0.0
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
CREATE_Sfile_P: Time to make Sfile.: 11/03/16 09:57:16.050
Create_Sfile_P: S-filename.....: 11-0957-16R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03
Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603

```

```

RTDET: S_REC P.....: 2016 311 957 16.0
In S_REC_P: FILENAME: 2016-03-11-0957-16.PPHAS_019_00_01
1 CX PB08 BHZ 3666765439.5 11/03/16 09:57:19.519 0
1 CX HMBCX BHZ 3666765445.2 11/03/16 09:57:25.250 0
1 CX PB12 BHZ 3666765452.0 11/03/16 09:57:32.050 0
1 CX PB01 BHZ 3666765455.9 11/03/16 09:57:35.919 0
1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
1 CX PATCX BHZ 3666765455.3 11/03/16 09:57:35.300 0
1 CX PB09 BHZ 3666765469.5 11/03/16 09:57:49.450 1
1 CX PB09 BHZ -1.0 11/03/16 09:50:03.350 0
Create Sfile P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
16R.S201603_hyp_save.out
Start WRITE RTPHASE thread !
WRITE RTPHASE thread started. Return 0
*****
WRITE DATA BUFFER
S_FILE: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
W_FILE: 2016-03-11-0957-16.PPHAS_019_00_01
SUBNET: 1 CHANNEL: 0 to 19
*****
RTPPH:.....: MINTRGTID: 11/03/201609:57:16.0
RTPPH:.....: TRG_TID: 2016-03-11-09:57:16.0
READ_PACKETS...:Trigger CH: 11->11 ant: 364 MxAmp: 471.4 nlev: 8.3 sta: 109.8 lta:
7.4 rat: 14.8 3666765470.9 PB09 BHZ
RTPPH: Found.....: hyp.out
RTPPH: readings left.....: 8 Avg.res: 69.838
RTPPH: readings left.....: 7 Avg.res: 64.914
RTPPH: readings left.....: 6 Avg.res: 0.315
RTPPH: Average residual.....: 0.315000
RTPPH: No more iterations.....: Number of stations:6 Avg: res.: 0.315
UTC: 11/03/2016 09:57:16.0 | Lat: | -19.55 | Lon: | -69.32 | Mw: | - | Ml: | - | Mc: | - |
Provincia del Tamarugal, I Region de Tarapaca, Chile

RTPPH: UTC: 11/03/2016 09:57:16.0 Lat: -19.55 Lon: -69.32 Provincia del Tamarugal, I Region de
Tarapaca, Chile
*****
*****
* FPICK: Detection SUBNET: 1 kan: 8 CX PB01 BHZ BUFFER_TIME: 2016 71 9:57:40.2195
TRG_TIME: 2016/ 3/11 9:57:55.92 *
*****
*****
FPICKS: P_PHASE: 8 STAT DIG CMP ? P0_ ? 20160311 0957 55.9190 GAU 1.500e-01
0.000e+00 3.730e+01 2.000e-01
FPICKS: First free is index subnetno 1: 7
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765411.0 TRG: 3666765439.5 TNOW:
3666765481.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765411.0 TRG: 3666765445.2 TNOW:
3666765481.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765411.0 TRG: 3666765452.0 TNOW:
3666765481.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765411.0 TRG: 3666765455.9 TNOW:
3666765481.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765411.0 TRG: 3666765451.1 TNOW:
3666765481.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765411.0 TRG: 3666765455.3 TNOW:
3666765481.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09 BHZ TBEF:3666765411.0 TRG: 3666765469.5 TNOW:
3666765481.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 7 1 CX PB01 BHZ TBEF:3666765411.0 TRG: 3666765475.9 TNOW:
3666765481.0 11/03/16 09:57:55.919
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765411.0 TRG: 3666765436.0 TNOW:
3666765481.0 11/03/16 09:57:16.050
FPICKS: Phasepics subnet 1: 9
FPICK: AN EVENT IS DETECTED !! 48
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 6 3666765469.5 33.4
FPICKS: 7 3666765475.9 39.9
FPICKS: 11 3666765436.0 0.0
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01

```



```

CREATE_Sfile_P: Time to make Sfile...: 11/03/16 09:57:16.050
Create_Sfile_P: S-filename.....: 11-0957-16R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03
Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
RTDET: S_REC P.....: 2016 311 957 16.0
In S_REC_P: FILENAME: 2016-03-11-0957-16.PPHAS_019_00_01
1 CX PB08 BHZ 3666765439.5 11/03/16 09:57:19.519 0
1 CX HMBCX BHZ 3666765445.2 11/03/16 09:57:25.250 0
1 CX PB12 BHZ 3666765452.0 11/03/16 09:57:32.050 0
1 CX PB01 BHZ 3666765455.9 11/03/16 09:57:35.919 0
1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
1 CX PATCX BHZ 3666765455.3 11/03/16 09:57:35.300 0
1 CX PB09 BHZ 3666765469.5 11/03/16 09:57:49.450 0
1 CX PB01 BHZ 3666765475.9 11/03/16 09:57:55.919 1
1 CX PB07 BHZ -1.0 11/03/16 09:50:05.619 0
Create_Sfile_P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
16R.S201603 hyp_save.out
Start WRITE RTPHASE thread !
WRITE RTPHASE thread started. Return 0
*****
WRITE DATA BUFFER
S_FILE: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
W_FILE: 2016-03-11-0957-16.PPHAS_019_00_01
SUBNET: 1 CHANNEL: 0 to 19
*****
RTPPH:.....: MINTRGID: 11/03/201609:57:16.0
RTPPH:.....: TRG_TID: 2016-03-11-09:57:16.0
RTPPH: Found.....: hyp.out
RTPPH: readings left.....: 9 Avg.res: 60.108
RTPPH: readings left.....: 8 Avg.res: 0.754
RTPPH: Average residual.....: 0.753750
RTPPH: No more iterations.....: Number of stations: 8 Avg: res.: 0.754
UTC: 11/03/2016 09:57:16.0 | Lat: | -19.54 | Lon: | -69.36 | Mw: | - | Ml: | - | Mc: | - |
Provincia del Tamarugal, I Region de Tarapaca, Chile

RTPPH: UTC: 11/03/2016 09:57:16.0 Lat: -19.54 Lon: -69.36 Provincia del Tamarugal, I Region de
Tarapaca, Chile
*****
* FPICK: Detection SUBNET: 1 kan: 9 CX PB02 BHZ BUFFER_TIME: 2016 71 9:57:22.4195
TRG_TIME: 2016/ 3/11 9:57:41.27 *
*****
FPICKS: P_PHASE: 9 STAT DIG CMP ? P0_ ? 20160311 0957 41.2690 GAU 5.000e-02
0.000e+00 1.233e+01 5.000e-02
FPICKS: First free is index subnetno 1: 8
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765412.0 TRG: 3666765439.5 TNOW:
3666765482.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765412.0 TRG: 3666765445.2 TNOW:
3666765482.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765412.0 TRG: 3666765452.0 TNOW:
3666765482.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765412.0 TRG: 3666765455.9 TNOW:
3666765482.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765412.0 TRG: 3666765451.1 TNOW:
3666765482.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765412.0 TRG: 3666765455.3 TNOW:
3666765482.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09 BHZ TBEF:3666765412.0 TRG: 3666765469.5 TNOW:
3666765482.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 7 1 CX PB01 BHZ TBEF:3666765412.0 TRG: 3666765475.9 TNOW:
3666765482.0 11/03/16 09:57:55.919
FPICKS: subnet: 1 index: 8 1 CX PB02 BHZ TBEF:3666765412.0 TRG: 3666765461.3 TNOW:
3666765482.0 11/03/16 09:57:41.269
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765412.0 TRG: 3666765436.0 TNOW:
3666765482.0 11/03/16 09:57:16.050
FPICKS: Phasepics subnet 1: 10
FPICK: AN EVENT IS DETECTED !! 49
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 6 3666765469.5 33.4
FPICKS: 7 3666765475.9 39.9

```

```

FPICKS: 8 3666765461.3 25.2
FPICKS: 11 3666765436.0 0.0
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
Thread WRITE RTPHASE BUSY!
READ_PACKETS...:Trigger CH: 9-> 9 ant: 432 MxAmp: 448.8 nlev: 6.7 sta: 108.5 lta:
4.9 rat: 22.0 3666765461.9 PB02 BHZ
*****
* FPICK: Detection SUBNET: 1 kan: 1 CX PB12 BHZ BUFFER_TIME: 2016 71 9:57:47.2500
TRG_TIME: 2016/ 3/11 9:57:51.00 *
*****
*****
FPICKS: P_PHASE: 1 STAT DIG CMP ? P0_ ? 20160311 0957 51.0000 GAU 5.000e-02
0.000e+00 1.334e+01 4.000e-01
FPICKS: First free is index subnetno 1: 9
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765412.0 TRG: 3666765439.5 TNOW:
3666765482.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765412.0 TRG: 3666765445.2 TNOW:
3666765482.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765412.0 TRG: 3666765452.0 TNOW:
3666765482.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765412.0 TRG: 3666765455.9 TNOW:
3666765482.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765412.0 TRG: 3666765451.1 TNOW:
3666765482.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765412.0 TRG: 3666765455.3 TNOW:
3666765482.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09 BHZ TBEF:3666765412.0 TRG: 3666765469.5 TNOW:
3666765482.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 7 1 CX PB01 BHZ TBEF:3666765412.0 TRG: 3666765475.9 TNOW:
3666765482.0 11/03/16 09:57:55.919
FPICKS: subnet: 1 index: 8 1 CX PB02 BHZ TBEF:3666765412.0 TRG: 3666765461.3 TNOW:
3666765482.0 11/03/16 09:57:41.269
FPICKS: subnet: 1 index: 9 1 CX PB12 BHZ TBEF:3666765412.0 TRG: 3666765471.0 TNOW:
3666765482.0 11/03/16 09:57:51.000
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765412.0 TRG: 3666765436.0 TNOW:
3666765482.0 11/03/16 09:57:16.050
FPICKS: Phasepics subnet 1: 11
FPICK: AN EVENT IS DETECTED !! 50
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 6 3666765469.5 33.4
FPICKS: 7 3666765475.9 39.9
FPICKS: 8 3666765461.3 25.2
FPICKS: 9 3666765471.0 35.0
FPICKS: 11 3666765436.0 0.0
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
Thread WRITE RTPHASE BUSY!
*****
*****
* FPICK: Detection SUBNET: 1 kan:10 CX PB07 BHZ BUFFER_TIME: 2016 71 9:57:44.4195
TRG_TIME: 2016/ 3/11 9:57:48.07 *
*****
*****
FPICKS: P_PHASE: 10 STAT DIG CMP ? P0_ ? 20160311 0957 48.0690 GAU 5.000e-02
0.000e+00 1.788e+01 5.000e-02
FPICKS: First free is index subnetno 1: 10
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765418.0 TRG: 3666765439.5 TNOW:
3666765488.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765418.0 TRG: 3666765445.2 TNOW:
3666765488.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765418.0 TRG: 3666765452.0 TNOW:
3666765488.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765418.0 TRG: 3666765455.9 TNOW:
3666765488.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765418.0 TRG: 3666765451.1 TNOW:
3666765488.0 11/03/16 09:57:31.149

```

```

FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765418.0 TRG: 3666765455.3 TNOW:
3666765488.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09 BHZ TBEF:3666765418.0 TRG: 3666765469.5 TNOW:
3666765488.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 7 1 CX PB01 BHZ TBEF:3666765418.0 TRG: 3666765475.9 TNOW:
3666765488.0 11/03/16 09:57:55.919
FPICKS: subnet: 1 index: 8 1 CX PB02 BHZ TBEF:3666765418.0 TRG: 3666765461.3 TNOW:
3666765488.0 11/03/16 09:57:41.269
FPICKS: subnet: 1 index: 9 1 CX PB12 BHZ TBEF:3666765418.0 TRG: 3666765471.0 TNOW:
3666765488.0 11/03/16 09:57:51.000
FPICKS: subnet: 1 index: 10 1 CX PB07 BHZ TBEF:3666765418.0 TRG: 3666765468.1 TNOW:
3666765488.0 11/03/16 09:57:48.069
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765418.0 TRG: 3666765436.0 TNOW:
3666765488.0 11/03/16 09:57:16.050
FPICKS: Phasepics subnet 1: 12
FPICK: AN EVENT IS DETECTED !! 51
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 6 3666765469.5 33.4
FPICKS: 7 3666765475.9 39.9
FPICKS: 8 3666765461.3 25.2
FPICKS: 9 3666765471.0 35.0
FPICKS: 10 3666765468.1 32.0
FPICKS: 11 3666765436.0 0.0
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
CREATE_Sfile_P: Time to make Sfile.: 11/03/16 09:57:16.050
Create_Sfile_P: S-filename.....: 11-0957-16R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03
Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
RTDET: S_REC_P.....: 2016 311 957 16.0
In S_REC_P: FILENAME: 2016-03-11-0957-16.PPHAS_019_00_01
1 CX PB08 BHZ 3666765439.5 11/03/16 09:57:19.519 0
1 CX HMBCX BHZ 3666765445.2 11/03/16 09:57:25.250 0
1 CX PB12 BHZ 3666765452.0 11/03/16 09:57:32.050 0
1 CX PB01 BHZ 3666765455.9 11/03/16 09:57:35.919 0
1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
1 CX PATCX BHZ 3666765455.3 11/03/16 09:57:35.300 0
1 CX PB09 BHZ 3666765469.5 11/03/16 09:57:49.450 0
1 CX PB01 BHZ 3666765475.9 11/03/16 09:57:55.919 1
1 CX PB02 BHZ 3666765461.3 11/03/16 09:57:41.269 0
1 CX PB12 BHZ 3666765471.0 11/03/16 09:57:51.000 1
1 CX PB07 BHZ 3666765468.1 11/03/16 09:57:48.069 0
1 CX PB11 BHZ 3666765436.0 11/03/16 09:57:16.050 0
Create_Sfile_P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
16R.S201603 hyp_save.out
Start WRITE RTPHASE thread !
WRITE_RTPHASE thread started. Return 0
*****
WRITE DATA BUFFER
S_FILE: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
W_FILE: 2016-03-11-0957-16.PPHAS_019_00_01
SUBNET: 1 CHANNEL: 0 to 19
*****
RTPPH:.....: MINTRGTID: 11/03/201609:57:16.0
RTPPH:.....: TRG_TID: 2016-03-11-09:57:16.0
READ_PACKETS...:Trigger CH: 10->10 ant: 384 MxAmp: 312.8 nlev: 2.8 sta: 26.3 lta:
2.4 rat: 10.8 3666765468.3 PB07 BHZ
RTPPH: Found.....: hyp.out
RTPPH: readings left.....: 12 Avg.res: 1.649
RTPPH: Average residual.....: 1.649167
RTPPH: No more iterations.....: Number of stations: 12 Avg: res.: 1.649
UTC: 11/03/2016 09:57:16.0 | Lat: | -19.50 | Lon: | -69.57 | Mw: | - | Ml: | - | Mc: | - |
Provincia del Tamarugal, I Region de Tarapaca, Chile

RTPPH: UTC: 11/03/2016 09:57:16.0 Lat: -19.50 Lon: -69.57 Provincia del Tamarugal, I Region de
Tarapacá, Chile
*****
*****
* FPICK: Detection SUBNET: 1 kan: 9 CX PB02 BHZ BUFFER_TIME: 2016 71 9:57:59.3195
TRG_TIME: 2016/ 3/11 9:58: 7.42 *

```

```

*****
*****
FPICKS: P_PHASE: 9 STAT DIG CMP ? P0_ ? 20160311 0958 7.4190 GAU 5.000e-02
0.000e+00 1.166e+01 1.000e-01
FPICKS: First free is index subnetno 1: 12
FPICKS: subnet: 1 index: 0 1 CX PB08 BHZ TBEF:3666765431.0 TRG: 3666765439.5 TNOW:
3666765501.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX BHZ TBEF:3666765431.0 TRG: 3666765445.2 TNOW:
3666765501.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12 BHZ TBEF:3666765431.0 TRG: 3666765452.0 TNOW:
3666765501.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01 BHZ TBEF:3666765431.0 TRG: 3666765455.9 TNOW:
3666765501.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16 BHZ TBEF:3666765431.0 TRG: 3666765451.1 TNOW:
3666765501.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX BHZ TBEF:3666765431.0 TRG: 3666765455.3 TNOW:
3666765501.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09 BHZ TBEF:3666765431.0 TRG: 3666765469.5 TNOW:
3666765501.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 7 1 CX PB01 BHZ TBEF:3666765431.0 TRG: 3666765475.9 TNOW:
3666765501.0 11/03/16 09:57:55.919
FPICKS: subnet: 1 index: 8 1 CX PB02 BHZ TBEF:3666765431.0 TRG: 3666765461.3 TNOW:
3666765501.0 11/03/16 09:57:41.269
FPICKS: subnet: 1 index: 9 1 CX PB12 BHZ TBEF:3666765431.0 TRG: 3666765471.0 TNOW:
3666765501.0 11/03/16 09:57:51.000
FPICKS: subnet: 1 index: 10 1 CX PB07 BHZ TBEF:3666765431.0 TRG: 3666765468.1 TNOW:
3666765501.0 11/03/16 09:57:48.069
FPICKS: subnet: 1 index: 11 1 CX PB11 BHZ TBEF:3666765431.0 TRG: 3666765436.0 TNOW:
3666765501.0 11/03/16 09:57:16.050
FPICKS: subnet: 1 index: 12 1 CX PB02 BHZ TBEF:3666765431.0 TRG: 3666765487.4 TNOW:
3666765501.0 11/03/16 09:58:07.419
FPICKS: Phasepics subnet 1: 13
FPICK: AN EVENT IS DETECTED !! 52
FPICKS: 0 3666765439.5 3.5
FPICKS: 1 3666765445.2 9.2
FPICKS: 2 3666765452.0 16.0
FPICKS: 3 3666765455.9 19.9
FPICKS: 4 3666765451.1 15.1
FPICKS: 5 3666765455.3 19.2
FPICKS: 6 3666765469.5 33.4
FPICKS: 7 3666765475.9 39.9
FPICKS: 8 3666765461.3 25.2
FPICKS: 9 3666765471.0 35.0
FPICKS: 10 3666765468.1 32.0
FPICKS: 11 3666765436.0 0.0
FPICKS: 12 3666765487.4 51.4
FPICK: pidx: 11
FPICK: MINPPHASE: 11/03/16 09:57:16.050 mintid: 3666765436.0
TRIGGER_TIME_FPICK: .....wave_file_name: 2016-03-11-0957-16.PPHAS_019_00_01
CREATE_Sfile_P: Time to make Sfile.: 11/03/16 09:57:16.050
Create_Sfile_P: S-filename.....: 11-0957-16R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03
Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
RTDET: S_REC_P.....: 2016 311 957 16.0
In S_REC_P: FILENAME: 2016-03-11-0957-16.PPHAS_019_00_01
1 CX PB08 BHZ 3666765439.5 11/03/16 09:57:19.519 0
1 CX HMBCX BHZ 3666765445.2 11/03/16 09:57:25.250 0
1 CX PB12 BHZ 3666765452.0 11/03/16 09:57:32.050 0
1 CX PB01 BHZ 3666765455.9 11/03/16 09:57:35.919 0
1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
1 CX PATCX BHZ 3666765455.3 11/03/16 09:57:35.300 0
1 CX PB09 BHZ 3666765469.5 11/03/16 09:57:49.450 0
1 CX PB01 BHZ 3666765475.9 11/03/16 09:57:55.919 1
1 CX PB02 BHZ 3666765461.3 11/03/16 09:57:41.269 0
1 CX PB12 BHZ 3666765471.0 11/03/16 09:57:51.000 1
1 CX PB07 BHZ 3666765468.1 11/03/16 09:57:48.069 0
1 CX PB11 BHZ 3666765436.0 11/03/16 09:57:16.050 0
1 CX PB02 BHZ 3666765487.4 11/03/16 09:58:07.419 1
Create_Sfile_P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
16R.S201603 hyp_save.out
Start WRITE RTPHASE thread !
WRITE RTPHASE thread started. Return 0
*****
WRITE DATA BUFFER
S_FILE: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-16R.S201603
W_FILE: 2016-03-11-0957-16.PPHAS_019_00_01

```

```

SUBNET:      1 CHANNEL: 0 to 19
*****
RTPPH:.....: MINTRGTID: 11/03/201609:57:16.0
RTPPH:.....: TRG_TID:   2016-03-11-09:57:16.0
RTPPH: Found.....: hyp.out
RTPPH: readings left.....: 13 Avg.res:      1.867
RTPPH: Average residual.....: 1.866923
RTPPH: No more iterations.....: Number of stations: 13 Avg: res.:      1.867
UTC: 11/03/2016 09:57:16.0 | Lat: | -19.50 | Lon: | -69.57 | Mw: | - | Ml: | - | Mc: | - |
Provincia del Tamarugal, I Region de Tarapaca, Chile

RTPPH: UTC: 11/03/2016 09:57:16.0 Lat: -19.50 Lon: -69.57 Provincia del Tamarugal, I Region de
Tarapaca, Chile
*****
* FPICK: Detection SUBNET: 1 kan:11 CX PB09   BHZ BUFFER_TIME: 2016   71   9:58:09.5000
TRG TIME: 2016/ 3/11   9:58:19.70   *
*****
FPICKS: P_PHASE: 11 STAT   DIG  CMP  ? P0_   ? 20160311 0958   19.7000 GAU 1.000e-01
0.000e+00 2.055e+01 2.000e-01
FPICKS: First free is index subnetno 1: 13
FPICKS: subnet: 1 index: 0 1 CX PB08   BHZ TBEF:3666765437.0 TRG: 3666765439.5 TNOW:
3666765507.0 11/03/16 09:57:19.519
FPICKS: subnet: 1 index: 1 1 CX HMBCX   BHZ TBEF:3666765437.0 TRG: 3666765445.2 TNOW:
3666765507.0 11/03/16 09:57:25.250
FPICKS: subnet: 1 index: 2 1 CX PB12   BHZ TBEF:3666765437.0 TRG: 3666765452.0 TNOW:
3666765507.0 11/03/16 09:57:32.050
FPICKS: subnet: 1 index: 3 1 CX PB01   BHZ TBEF:3666765437.0 TRG: 3666765455.9 TNOW:
3666765507.0 11/03/16 09:57:35.919
FPICKS: subnet: 1 index: 4 1 CX PB16   BHZ TBEF:3666765437.0 TRG: 3666765451.1 TNOW:
3666765507.0 11/03/16 09:57:31.149
FPICKS: subnet: 1 index: 5 1 CX PATCX   BHZ TBEF:3666765437.0 TRG: 3666765455.3 TNOW:
3666765507.0 11/03/16 09:57:35.300
FPICKS: subnet: 1 index: 6 1 CX PB09   BHZ TBEF:3666765437.0 TRG: 3666765469.5 TNOW:
3666765507.0 11/03/16 09:57:49.450
FPICKS: subnet: 1 index: 7 1 CX PB01   BHZ TBEF:3666765437.0 TRG: 3666765475.9 TNOW:
3666765507.0 11/03/16 09:57:55.919
FPICKS: subnet: 1 index: 8 1 CX PB02   BHZ TBEF:3666765437.0 TRG: 3666765461.3 TNOW:
3666765507.0 11/03/16 09:57:41.269
FPICKS: subnet: 1 index: 9 1 CX PB12   BHZ TBEF:3666765437.0 TRG: 3666765471.0 TNOW:
3666765507.0 11/03/16 09:57:51.000
FPICKS: subnet: 1 index: 10 1 CX PB07   BHZ TBEF:3666765437.0 TRG: 3666765468.1 TNOW:
3666765507.0 11/03/16 09:57:48.069
FPICKS: subnet: 1 index: 12 1 CX PB02   BHZ TBEF:3666765437.0 TRG: 3666765487.4 TNOW:
3666765507.0 11/03/16 09:58:07.419
FPICKS: subnet: 1 index: 13 1 CX PB09   BHZ TBEF:3666765437.0 TRG: 3666765499.7 TNOW:
3666765507.0 11/03/16 09:58:19.700
FPICKS: Phasepics subnet 1: 13
FPICK: AN EVENT IS DETECTED !! 53
FPICKS: 0 3666765439.5      0.0
FPICKS: 1 3666765445.2      5.7
FPICKS: 2 3666765452.0     12.5
FPICKS: 3 3666765455.9     16.4
FPICKS: 4 3666765451.1     11.6
FPICKS: 5 3666765455.3     15.8
FPICKS: 6 3666765469.5     29.9
FPICKS: 7 3666765475.9     36.4
FPICKS: 8 3666765461.3     21.8
FPICKS: 9 3666765471.0     31.5
FPICKS: 10 3666765468.1     28.6
FPICKS: 12 3666765487.4     47.9
FPICKS: 13 3666765499.7     60.2
FPICK: pidx: 0
FPICK: MINPPHASE: 11/03/16 09:57:19.519 mintid: 3666765439.5
TRIGGER TIME_FPICK: .....wave_file_name: 2016-03-11-0957-19.PPHAS_019_00_01
CREATE_Sfile_P: Time to make Sfile.: 11/03/16 09:57:19.519
Create_Sfile_P: S-filename.....: 11-0957-19R.S201603
Create_Sfile_P DUMMY.....: /home/seismo/snew/REA/PPHAS/2016/03
Create_Sfile_P FULLPATH.....: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-19R.S201603
RTDET_S_REC_P.....: 2016 311 957 19.5
In S_REC_P: FILENAME: 2016-03-11-0957-19.PPHAS_019_00_01
1 CX PB08   BHZ   3666765439.5 11/03/16 09:57:19.519 0
1 CX HMBCX   BHZ   3666765445.2 11/03/16 09:57:25.250 0
1 CX PB12   BHZ   3666765452.0 11/03/16 09:57:32.050 0
1 CX PB01   BHZ   3666765455.9 11/03/16 09:57:35.919 0

```

```

1 CX PB16 BHZ 3666765451.1 11/03/16 09:57:31.149 0
1 CX PATCX BHZ 3666765455.3 11/03/16 09:57:35.300 0
1 CX PB09 BHZ 3666765469.5 11/03/16 09:57:49.450 0
1 CX PB01 BHZ 3666765475.9 11/03/16 09:57:55.919 1
1 CX PB02 BHZ 3666765461.3 11/03/16 09:57:41.269 0
1 CX PB12 BHZ 3666765471.0 11/03/16 09:57:51.000 1
1 CX PB07 BHZ 3666765468.1 11/03/16 09:57:48.069 0
1 CX PB11 BHZ -1.0 11/03/16 09:57:16.050 0
1 CX PB02 BHZ 3666765487.4 11/03/16 09:58:07.419 1
Create_Sfile_P.....: cp /home/seismo/snew/REA/PPHAS/2016/03//11-0957-
19R.S201603 hyp_save.out
Start WRITE_RTPHASE thread !
WRITE_RTPHASE thread started. Return 0
*****
WRITE DATA BUFFER
S_FILE: /home/seismo/snew/REA/PPHAS/2016/03//11-0957-19R.S201603
W_FILE: 2016-03-11-0957-19.PPHAS_019_00_01
SUBNET: 1 CHANNEL: 0 to 19
*****
RTPPH:.....: MINTRGTID: 11/03/201609:57:19.5
RTPPH:.....: TRG_TID: 2016-03-11-09:57:19.5
RTPPH: Found.....: hyp.out
RTPPH: readings left.....: 13 Avg.res: 1.867
RTPPH: Average residual.....: 1.866923
RTPPH: No more iterations.....: Number of stations: 13 Avg: res.: 1.867
UTC: 11/03/2016 09:57:19.5 | Lat: | -19.50 | Lon: | -69.57 | Mw: | - | Ml: | - | Mc: | - |
Provincia del Tamarugal, I Region de Tarapaca, Chile

RTPPH: UTC: 11/03/2016 09:57:19.5 Lat: -19.50 Lon: -69.57 Provincia del Tamarugal, I Region de
Tarapaca;, Chile
READ_PACKETS...:Trigger CH: 13->13 ant: 402 MxAmp: 130.5 nlev: 8.1 sta: 33.5 lta:
7.9 rat: 4.2 3666765516.1 PB04 BHZ
READ_PACKETS...:Trigger CH: 14->14 ant: 396 MxAmp: 182.5 nlev: 6.3 sta: 45.0 lta:
6.3 rat: 7.1 3666765524.6 PB06 BHZ

READ_PACKETS...:klon: 0 PATCX BHZ turned off. Dur: 70
READ_PACKETS...:Trigger CH: 16->16 ant: 206 MxAmp: 1809.9 nlev: 119.8 sta: 544.8 lta:
105.3 rat: 5.2 3666765540.8 PB15 BHZ
READ_PACKETS...:klon: 0 PB04 BHZ turned off. Dur: 35
READ_PACKETS...:klon: 0 PB12 BHZ turned off. Dur: 103
READ_PACKETS...:klon: 0 PB08 BHZ turned off. Dur: 116
READ_PACKETS...:klon: 0 PB16 BHZ turned off. Dur: 102
READ_PACKETS...:klon: 0 PB11 BHZ turned off. Dur: 120
READ_PACKETS...:klon: 0 PB15 BHZ turned off. Dur: 20
READ_PACKETS...:klon: 0 PB06 BHZ turned off. Dur: 38
READ_PACKETS...:klon: 0 PB01 BHZ turned off. Dur: 111
READ_PACKETS...:klon: 0 HMBCX BHZ turned off. Dur: 124
READ_PACKETS...:klon: 0 PB07 BHZ turned off. Dur: 94
READ_PACKETS...:klon: 0 PB09 BHZ turned off. Dur: 109
READ_PACKETS...:klon: 0 PB02 BHZ turned off. Dur: 119
Rescale-Filter

```

After around 7-8 minutes, the triggers seen in the RDLY figure on top enters the array propagation window and a network trigger is declared. The time for the first trigger is calculated

```

*****
* TRIGGER on thread 1 ! *
*****
/home/seismo/rtnew/map/glasses.wav: No such file or directory
kan: 0 1 CX PB16 BHZ time: 3666765440.90 index: 677 dur: 106
kan: 1 1 CX PB12 BHZ time: 3666765435.20 index: 672 dur: 105
kan: 4 1 CX PB11 BHZ time: 3666765427.20 index: 664 dur: 124
kan: 5 1 CX PB08 BHZ time: 3666765421.42 index: 658 dur: 118
kan: 6 1 CX HMBCX BHZ time: 3666765429.35 index: 666 dur: 124
kan: 7 1 CX PATCX BHZ time: 3666765447.35 index: 684 dur: 70
kan: 8 1 CX PB01 BHZ time: 3666765436.42 index: 673 dur: 114
kan: 9 1 CX PB02 BHZ time: 3666765442.42 index: 679 dur: 122
kan: 10 1 CX PB07 BHZ time: 3666765464.42 index: 701 dur: 95
kan: 11 1 CX PB09 BHZ time: 3666765455.75 index: 692 dur: 113
RTDET: TRG_MUL.....: mintid : 3666765421.42 maxdur: 124
RTDET: TRG_MUL.....: MINTRGTID: 2016/ 3/11 9:57: 1.4
RTDET: TRG_MUL.....: MINTRGTID: 11/03/2016 09:57: 1.4
RTDET: CAT_MUL thread: 1 started. channels: 0 from: 0 to: 54

```

A thread to extract the waveform data from the seedlink server, the waveform file name is generated and the corresponding s-file name

```
*****
RTDET: CAT_MUL started
*****
RTDET: CAT_MUL.....: maxdur: 124
RTDET: CAT_MUL.....: FILNAVN: 2016-03-11-0956-01.TST__054_00_01
RTDET: CAT_MUL.....: PATHANDFIL: /home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01
RTDET: CAT_MUL.....: CRTDIR: /home/seismo/snew/WAV/TST__/2016/03
RTDET: CAT_MUL.....: 2016/ 3/11 10: 0: 5.4
```

## Extraction of waveform data

```
*****
RTDET: CAT_MUL Extracting data from SeedLink server.....
*****
-S "CX_PB16:BHZ.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB16:BHN.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB16:BHE.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB12:BHZ.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB12:BHN.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB12:BHE.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_MNMCX:BHZ.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
TUMOD network timeout (1s), reconnecting in 1s
-S "CX_MNMCX:BHN.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
.
.
.

-S "CX_PB05:BHE.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
TUMOD network timeout (1s), reconnecting in 1s
-S "CX_PB15:BHZ.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB15:BHN.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB15:BHE.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB10:BHZ.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB10:BHN.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB10:BHE.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB14:BHZ.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB14:BHN.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
-S "CX_PB14:BHE.D" -tw 2016,3,11,9,56,1:2016,3,11,10,0,5 -nt 1 -nd 1 -o
/home/seismo/snew/WAV/TST__/2016/03/2016-03-11-0956-01.TST__054_00_01 139.17.3.177
RTDET: CAT_MUL.....: call Create_Sfile
RTDET: Create_Sfile S-filename.....: 11-0957-01R.S201603
RTDET: Create_Sfile DUMMY.....: /home/seismo/snew/REA/TST__/2016/03
RTDET: Create_Sfile FULLPATH.....: /home/seismo/snew/REA/TST__/2016/03//11-0957-01R.S201603
RTDET: S_REC.....: 2016 311 957 1.4
nchannels: 54
RTDET: Create_Sfile.....: cp /home/seismo/snew/REA/TST__/2016/03//11-0957-01R.S201603 hyp_save.out
RTDET: CAT_MUL.....SFILEPATH: /home/seismo/snew/REA
RTDET: CAT_MUL.....DBNAME : TST__
AUTOPHASE is NOT running.
```

## Run the phase picker on the extracted data

```
RTDET: CAT_MUL (cd /home/seismo/rtnew/rt/tmp1 && exec /home/seismo/rtnew/bin/autophase -prt 0
-sfile /home/seismo/snew/REA/TST___/2016/03/11-0957-01R.S201603 -wavefile
/home/seismo/snew/WAV/TST___/2016/03/2016-03-11-0956-01.TST___054_00_01)
SEISAN_TOP.....: /home/seismo/snew
AUTOPHASE: RTQUAKE TOP.....: /home/seismo/rtnew
AUTOPHASE: HTML_TOP.....: /home/seismo/RTWEB
AUTOPHASE: read rtquake.par
wfilename: /home/seismo/snew/WAV/TST___/2016/03/2016-03-11-0956-01.TST___054_00_01
```

## Phases found by the picker

```
CX_PB16__00_BHZ 11/03/16 09:57:31.349
CX_PB16__00_BHN 11/03/16 09:57:31.349 15.40
CX_PB16__00_BHE 11/03/16 09:57:47.300
CX_PB12__00_BHZ 11/03/16 09:57:32.050 18.95
CX_PB12__00_BHN 11/03/16 09:57:32.300
CX_PB12__00_BHE 11/03/16 09:57:32.350
CX_PB11__00_BHZ 11/03/16 09:57:16.400 5.85
CX_PB11__00_BHN 11/03/16 09:57:16.450 5.95
CX_PB11__00_BHE 11/03/16 09:57:16.250 6.15
CX_PB08__00_BHZ 11/03/16 09:57:19.869
CX_PB08__00_BHN 11/03/16 09:57:19.619
CX_PB08__00_BHE 11/03/16 09:57:19.669 8.55
CX_HMBCX__00_BHZ 11/03/16 09:57:25.250
CX_HMBCX__00_BHN 11/03/16 09:57:25.600
CX_HMBCX__00_BHE 11/03/16 09:57:25.450 12.90
CX_PATCX__00_BHZ 11/03/16 09:57:35.300
CX_PATCX__00_BHE 11/03/16 09:57:56.150
CX_PB01__00_BHZ 11/03/16 09:57:35.969 19.90
CX_PB01__00_BHN 11/03/16 09:57:35.919 20.20
CX_PB01__00_BHE 11/03/16 09:57:36.169 19.25
CX_PB02__00_BHZ 11/03/16 09:57:41.269 26.15
CX_PB02__00_BHN 11/03/16 09:57:41.169 24.75
CX_PB02__00_BHE 11/03/16 09:57:41.619 24.60
CX_PB07__00_BHZ 11/03/16 09:57:47.869
CX_PB07__00_BHN 11/03/16 09:57:47.919 32.60
CX_PB07__00_BHE 11/03/16 09:57:48.169 29.50
CX_PB09__00_BHZ 11/03/16 09:57:49.199 30.50
CX_PB09__00_BHN 11/03/16 09:57:49.550 30.30
CX_PB09__00_BHE 11/03/16 09:57:49.500 30.10
```

### ----- SELECTED PICKS:

```
-----
0 PB16 BHZ P 11/03/16 09:57:31.349
1 PB16 BHN S 11/03/16 09:57:46.749
3 PB12 BHZ P 11/03/16 09:57:32.050
6 PB11 BHZ P 11/03/16 09:57:16.400
7 PB11 BHN S 11/03/16 09:57:22.400
8 PB11 BHE S 11/03/16 09:57:22.400
9 PB08 BHZ P 11/03/16 09:57:19.869
11 PB08 BHE S 11/03/16 09:57:28.219
12 HMBCX BHZ P 11/03/16 09:57:25.250
14 HMBCX BHE S 11/03/16 09:57:38.350
15 PATCX BHZ P 11/03/16 09:57:35.300
18 PB01 BHZ P 11/03/16 09:57:35.969
19 PB01 BHN S 11/03/16 09:57:56.119
20 PB01 BHE S 11/03/16 09:57:55.419
21 PB02 BHZ P 11/03/16 09:57:41.269
22 PB02 BHN S 11/03/16 09:58:05.919
23 PB02 BHE S 11/03/16 09:58:06.219
24 PB07 BHZ P 11/03/16 09:57:47.869
25 PB07 BHN S 11/03/16 09:58:20.519
26 PB07 BHE S 11/03/16 09:58:17.669
27 PB09 BHZ P 11/03/16 09:57:49.199
28 PB09 BHN S 11/03/16 09:58:19.850
29 PB09 BHE S 11/03/16 09:58:19.600
-----
```

```
-----
0 PB16 BHZ P 11/03/16 09:57:31.349
1 PB16 BHN S 11/03/16 09:57:46.749
3 PB12 BHZ P 11/03/16 09:57:32.050
6 PB11 BHZ P 11/03/16 09:57:16.400
7 PB11 BHN S 11/03/16 09:57:22.400
9 PB08 BHZ P 11/03/16 09:57:19.869
```



```

11 PB08 BHE S 11/03/16 09:57:28.219
12 HMBCX BHZ P 11/03/16 09:57:25.250
14 HMBCX BHE S 11/03/16 09:57:38.350
15 PATCX BHZ P 11/03/16 09:57:35.300
18 PB01 BHZ P 11/03/16 09:57:35.969
20 PB01 BHE S 11/03/16 09:57:55.419
21 PB02 BHZ P 11/03/16 09:57:41.269
22 PB02 BHN S 11/03/16 09:58:05.919
24 PB07 BHZ P 11/03/16 09:57:47.869
26 PB07 BHE S 11/03/16 09:58:17.669
27 PB09 BHZ P 11/03/16 09:57:49.199
29 PB09 BHE S 11/03/16 09:58:19.600

```

## Add phases and write new s-file

```
-----
Create s-file: /home/seismo/snew/REA/TST__/2016/03//11-0957-01R.S201603
-----
```

```

0 2016 311 957 1.4 RM TST 1
1 2016-03-11-0956-01.TST__054_00_01 6
2 ACTION:NEW 16-03-11 09:57 OP:SEIS STATUS: ID:20160311095701 I
3 STAT SP IPHASW D HRMM SECON CODA AMPLIT PERI AZIMU VELO AIN AR TRES W DIS CAZ7
4 PB16 BZ IP A 957 31.34 110
5 PB12 BZ IP A 957 32.5 88
6 PB11 BZ IP A 957 16.40 123
7 PB08 BZ IP A 957 19.86 104
8 HMBCXBZ IP A 957 25.25 118
9 PATCXBZ IP A 957 35.30 63
10 PB01 BZ IP A 957 35.96 116
11 PB02 BZ IP A 957 41.26 106
12 PB07 BZ IP A 957 47.86 104
13 PB09 BZ IP A 957 49.19 108
14 PB16 BN IS 3A 957 46.74
15 PB11 BN IS 3A 957 22.40
16 PB08 BE IS 3A 957 28.21
17 HMBCXBE IS 3A 957 38.35
18 PB01 BE IS 3A 957 55.41
19 PB02 BN IS 3A 958 5.91
20 PB07 BE IS 3A 958 17.66
21 PB09 BE IS 3A 958 19.60

```

## Run iteration process as explained in chapter 11

```

-----
Start iterations to reduce average residuals, and do location.
-----
AUTOPHASE: readings left.....: 18 Avg.res: 1.311
AUTOPHASE: Average residual.....: 1.311
AUTOPHASE: No more iterations.....: Number of stations: 18 Avg.res.: 1.311

```

## Run automag

```

-----
Start automag.
-----
End of s-file
AUTOPHASE: AM:com15.....: cp automag.out
/home/seismo/snew/REA/TST__/2016/03//11-0957-01R.S201603
AUTOPHASE: AM:com14.....: hyp automag.out >> hyptemp.txt

```

## Update map + New latitude, longitude and magnitudes

### Use latitude, longitude in reverse geocoding to find geographical name of location

```

-----
Update graphics.
-----
wget -T 3 -O geo2.xml
"open.mapquestapi.com/nominatim/v1/reverse.php?key=Fmjtd%7Cluu8290b2g%2C75%3Do5-
947x0f&format=xml&lat=-19.511999&lon=-69.377998&zoom=7" 2>xml2.log
Map : UTC: 11/03/2016 09:57:01.4 | Lat: | -19.51 | Lon: | -69.38 | Provincia del Tamarugal, I
Region de Tarapaca;, Chile | MW: 2.2 | ML: 2.2
Mail: UTC: 11/03/2016 09:57:01.4 Lat: -19.51 Lon: -69.38 Mw: 2.2 Ml: 2.2 Provincia del
Tamarugal, I Region de Tarapaca;, Chile
-----
Remove old files.
-----

```

1 file(s) deleted.  
2 file(s) deleted.  
6 file(s) deleted.  
1 file(s) deleted.

-----  
Create plots for web-page.  
-----

-----  
Send mails to specified addresses.  
-----

rm: cannot remove 'seed.out': No such file or directory  
rm: cannot remove 'seed.out': No such file or directory

## 25 DIRECTORY OVERVIEW AFTER INSTALLATION

mydir

Makefile

mydir/cal

responsefiles for DEMO1 example

mydir/com

cron\_restart.bash

cron\_restart.csh

cron\_restart\_heli.bash

cron\_restart\_heli.csh

IPOC.TST

purge\_dir

rtquake.par

rtquake\_start

rtquake\_stop

rtquake\_heli\_tst1

rtquake\_heli\_tst2

rtloc.py

setup\_rt.bash

setup\_rt.csh

start\_rtdet.bash

start\_rtdet.csh

STATION0.HYP

mydir/dist

cron\_restart.bash

cron\_restart.csh

cron\_restart\_heli.bash

cron\_restart\_heli.csh

IPOC.TST

purge\_dir

rtquake.par

rtquake\_start

rtquake\_stop

rtquake\_heli\_tst1

rtquake\_heli\_tst2

rtloc.py

setup\_rt.bash

setup\_rt.csh

start\_rtdet.bash

start\_rtdet.csh

STATION0.HYP

STATIONS

mydir/doc

RTQUAKE\_MANUAL\_v2.0.pdf

seiscomp-2.5.pdf

mydir/inc

ew\_bridge.h

FilterPicker5.h

FilterPicker5\_Memory.h

PickData.h

- sachdr.h
- libslink.h
- sh\_mem\_rt.h
- slplatform.p
- mydir/libmseed
  - the miniseed library, Chad Trabant
- mydir/libslink
  - the SeedLink client library, Chad Trabant
- mydir/map
  - ALL\_EPI0.txt
  - emns\_epi.kml
  - emns\_refresh.kml
  - glasses.wav
  - icon49.png
  - icon56.png
  - LAST\_LOC.txt
  - LAST\_TRIG.html
  - rtge\_refresh.kml
  - STATIONS
  - triangle.png
  - tu1\_refresh.kml
  - yellow-dot.png
- mydir/par
  - brygge2.jpg
  - brygge2.jpg.ok
  - brygge2.white.jpg
  - detect.TST
  - IPOC.TST
  - Logo70X70.gif
  - record.TST
  - stations.conf
  - stations\_heli.TST
  - stations\_plot.TST
  - streams.conf
  - streams\_heli.TST
  - streams\_plot.TST
  - streams.TST
- mydir/picker
  - miniseed library, Chad Trabant
  - modified FilterPicker, A.Lomax
- mydir/req
  - empty
- mydir/rt
  - empty catalog structure for temporary files.
- mydir/rftp
  - cm6.h
  - ew\_bridge.h
  - FilterPicker5.c
  - FilterPicker5.h
  - FilterPicker5\_Memory.c

- FilterPicker5\_Memory.h
- getwindow
- Makefile
- msi
- PickData.c
- PickData.h
- picker\_func\_test.c
- picker\_func\_test\_memory.c
- rtdet.c
- sachdr.h
- slinktool
- mydir/rtq\_web      Catalog structure for maps, web pages, helicorder plots
  - /cod
  - /heli
  - /loc
  - /map
  - /png
  - /png\_filt
  - /pph
  - /tmp
  - /tmp\_filt
- mydir/rtslpl
  - Makefile
  - rtchk
  - rtslpl
- mydir/seedlink
  - seedlink-2.5 distro
- mydir/slinktool
  - slinktool distro
- mydir/utlis
  - Makefile
  - rtdly.c
  - rtmon.c
  - rtnet.c
  - rtsnr.c
  - rt24.c
  - rtdr24.c
  - rthplt.c
  - rttime.c
  - rtgeepi.c
  - rtpurge.c
  - respng.c
- mydir/wrk

## 26 REFERENCES

- Havskov, J and L. Ottemøller (1999). SEISAN earthquake analysis software. *Seismological Research letters*, 70, 532-534
- Lomax, A.; C. Satriano and M. Vassallo (2012). Automatic Picker Developments and Otimization: FilterPicker – a Robust,Broadband Picker for Real-Time Seismic Monitoring and Earthquake Early Warning. *Seismological Research Letters*, 83.
- Utheim, T. Havskov, J. Ozyazicioglu, M. Rodriguez, J. Talavera, E. (2014). RTQUAKE, A Real-Time Earthquake Detection System Integrated with SEISAN. *Seismological Research Letters* 85, 735-742