

# 3100-P PORTABLE SUB-BOTTOM

## USER HARDWARE MANUAL

0004802\_REV\_F

7/2/2018



**EdgeTech**  
4 Little Brook Road  
West Wareham, MA 02576

Tel: (508) 291-0057  
Fax: (508) 291-2491  
[www.EdgeTech.com](http://www.EdgeTech.com)

The information, figures, and specifications in this manual are proprietary and are issued in strict confidence on condition that they not be copied, reprinted, or disclosed to a third party, either wholly or in part, without the prior, written consent of EdgeTech. Any reproduction of EdgeTech supplied software or file sharing is strictly prohibited.

©Copyright 2015 by EdgeTech. All rights reserved.

Microsoft® and Windows® are registered trademarks of Microsoft Corporation.

Kevlar® is a registered trademark of the DuPont Company.

Intel® and Pentium® are registered trademarks of Intel Corporation.

Novagard G624® is a trademark of Novagard Solutions, Inc.

Storm Case™ is a trademark of Pelican.

## ATTENTION – READ THIS FIRST!

All personnel involved with the installation, operation, or maintenance of the equipment described in this manual should read and understand the warnings and cautions provided below.

**CAUTION!** This equipment contains devices that are extremely sensitive to static electricity. Therefore, extreme care should be taken when handling them. Normal handling precautions involve the use of anti-static protection materials and grounding straps for personnel.

**WARNING!** High Voltage may be present in all parts of the system. Therefore, use caution when the electronics are removed from their containers for servicing.

**CAUTION!** Operation with improper line voltage may cause serious damage to the equipment. Always ensure that the proper line voltage is used.

## Warnings, Cautions, and Notes

Where applicable, warnings, cautions, and notes are provided in this manual as follows:

**WARNING!**

Identifies a potential hazard that could cause injury or death.

**CAUTION!**

Identifies a potential hazard that could damage equipment or data.

**NOTE:** Recommendations or general information that is particular to the material being presented.

## HARDWARE VARIATIONS AND COMPATIBILITY

The 3100-P PORTABLE SUB-BOTTOM contains both standard and proprietary hardware. At times, EdgeTech may change the standard components due to their availability or performance improvements. Although the component manufacturers—along with their models and styles—may change from unit to unit, replacement parts will generally be interchangeable.

EdgeTech will make every effort to see that replacement components are interchangeable and use the same software drivers (if applicable). At times, however, direct replacements may not exist. When this happens, EdgeTech will provide the necessary drivers with the replacement part, if applicable.

EdgeTech may also change certain hardware per customer requirements. Therefore, portions of this manual, such as parts lists and test features, are subject to change. These sections should be used for reference only. When changes are made that affect system operation, they will be explicitly noted. Also, some options and features may not be active in the customer's unit at time of delivery. Upgrades will be made available when these features are implemented.

Contact [EDGE TECH CUSTOMER SERVICE](#) with any questions relating to compatibility.

## ABOUT THIS DOCUMENT

We, the employees at EdgeTech, would like to thank you for purchasing 3100-P. At EdgeTech, it is our policy to provide high-quality, cost-effective products and support services that meet or exceed your requirements. We also strive to deliver them on-time, and to continuously look for ways to improve them. We take pride in the products we manufacture, and want you to be entirely satisfied with your equipment.

### Purpose of this Manual

The purpose of this manual is to provide the user with information on the setup and use of EdgeTech's 3100-P. Although this manual encompasses the latest operational features of the 3100-P, some features may be periodically upgraded. Therefore, the information in this manual is subject to change and should be used for reference only.

### Liability

EdgeTech has made every effort to document the 3100-P in this manual accurately and completely. However, EdgeTech assumes no liability for errors or for any damages that result from the use of this manual or the equipment it documents. EdgeTech reserves the right to upgrade features of this equipment, and to make changes to this manual, without notice at any time.

### Revision History

REVISION	DESCRIPTION	DATE	APPROVAL
A	Release to Production	N/A	RM
B	N/A	N/A	RM
C	N/A	01/2014	TS
D	Updates	02/05/2015	TS
E	Updated Images, content, and diagrams	10/04/2017	TS
F	Updates to Drawings	07/02/2018	TS

## WARRANTY STATEMENT

All equipment manufactured by EdgeTech is warranted against defective components and workmanship for a period of one year after shipment. Warranty repair will be done by EdgeTech free of charge.

Shipping costs are to be borne by the customer. Malfunction due to improper use is not covered in the warranty, and EdgeTech disclaims any liability for consequential damage resulting from defects in the performance of the equipment. No product is warranted as being fit for a particular purpose, and there is no warranty of merchantability. This warranty applies only if:

- i. The items are used solely under the operating conditions and in the manner recommended in Seller's instruction manual, specifications, or other literature.
- ii. The items have not been misused or abused in any manner, nor have repairs been attempted thereon without the approval of EdgeTech Customer Service.
- iii. Written notice of the failure within the warranty period is forwarded to Seller and the directions received for properly identifying items returned under warranty are followed.
- iv. The return notice authorizes Seller to examine and disassemble returned products to the extent Seller deems necessary to ascertain the cause for failure.

The warranties expressed herein are exclusive. There are no other warranties, either expressed or implied, beyond those set forth herein, and Seller does not assume any other obligation or liability in connection with the sale or use of said products. Any product or service repaired under this warranty shall be warranted for the remaining portion of the original warranty period only.

Equipment not manufactured by EdgeTech is supported only to the extent of the original manufacturer's warranties.

# SOFTWARE SERVICE OVERVIEW

EdgeTech provides software services free of charge. This software agreement does not address customer-specified modifications or enhancements. These services may be ordered separately. Furthermore, EdgeTech software upgrades are meant for the sole use of EdgeTech customers. Any reproduction of EdgeTech-supplied software or file sharing is strictly prohibited.

## Software Updates and Enhancements

EdgeTech customers can download new software releases with all modifications and enhancements from the EdgeTech ftp site. Major software issues, should they occur, will be reported directly to the customer. New software releases consist of the following:

- Software enhancements that are not on the price list
- Software fixes and changes
- Product integration
- Documentation updates to on-line help
- Tests for compatibility with other modules

Software patches consist of software that has undergone the following:

- Minor software enhancements
- Software fixes and changes
- Software Telephone, Facsimile, and E-mail Support

EdgeTech customers are entitled to contact **EDGE TECH CUSTOMER SERVICE** by telephone, facsimile, or e-mail to report a difficulty, to discuss a problem or to receive advice on the best way to perform a task. When contacted, EdgeTech Customer Service will do the following:

- Respond within 24 hours
- Immediately attend to serious problems affecting operations
- Attempt to find an immediate work-around

## RETURNED MATERIAL AUTHORIZATION

Prior to returning any equipment to EdgeTech, a Returned Material Authorization (RMA) Number must be obtained from **CUSTOMER SERVICE**.

### RMA Purpose

The RMA Number identifies returned equipment when it arrives at our receiving dock and enables tracking while at our facility. Refer to RMA number on all documentation and correspondences.

All returned materials must be shipped prepaid. Freight collect shipments will not be accepted. All equipment should be adequately insured for shipping, but equipment belonging to EdgeTech must be insured for full value.

If there is more than one item per consignment, include a packing with the shipment. An invoice can double as a packing slip only when the contents are clearly numbered and identified on the invoice.

#### **CAUTION!**

Never attempt to ship a Portable Topside in its Storm Case™ alone. Although rugged, these cases are not intended to be used as shipping containers and the delicate internal components could be damaged. Shipping in this manner will void any warranties.

**NOTE:** All shipping charges shall be the responsibility of the customer, unless under warranty, as EdgeTech will pay for return shipping.

**NOTE:** For International Shipments valued over \$1000, the following Shipper's oath must be sent with the invoice.

Shipper's Oath:

"I, \_\_\_\_\_, declare that the articles herein specified are the growth, produce, or manufacture of the United States; that they were exported from the United States from the port of \_\_\_\_\_, on or about \_\_\_\_\_; that they are returned without having been advanced in value or improved in condition by any process of manufacture or any other means; and that no drawback, or allowance has been paid or admitted hereof."

Signed \_\_\_\_\_

## CUSTOMER SERVICE

Customer service personnel at EdgeTech are always eager to hear from users of our products. Your feedback is welcome, and is a valuable source of information which we use to continually improve these products. Therefore, we encourage you to contact EdgeTech Customer Service to offer any suggestions or to request technical support:

**E-mail:** service@edgetech.com

**Mail:** 4 Little Brook Road  
West Wareham, MA 02576

**Telephone:** (508) 291-0057

**Facsimile:** (508) 291-2491

**24-Hour Emergency  
Technical Support Line:** (508) 942-8043

**NOTE:** *Please have your system Serial Number available when contacting Customer Service.*

For more information please go to [www.EdgeTech.com](http://www.EdgeTech.com).

## COMPANY BACKGROUND

EdgeTech (formerly EG&G Marine Instruments) traces its history in underwater data acquisition and processing back to 1966. EdgeTech has designed, developed, and manufactured products, instruments, and systems—for the acquisition of underwater data, including marine, estuarine, and coastal applications—for over 50 years.

The company has responded to the needs of the scientific, Naval, and offshore communities by providing equipment—such as sub-bottom profilers, side scan sonar, acoustic releases, USBL positioning systems, and bathymetric systems—that have become standards in the industry.

EdgeTech has also consistently anticipated and responded to future needs through an active research and development program. Current efforts are focused on the application of cutting-edge CHIRP and acoustic technology.

# TABLE OF CONTENTS

<b>ATTENTION – READ THIS FIRST!</b> .....	<b>iii</b>
Warnings, Cautions, and Notes.....	iii
<b>HARDWARE VARIATIONS AND COMPATIBILITY</b> .....	<b>iv</b>
<b>ABOUT THIS DOCUMENT</b> .....	<b>v</b>
Purpose of this Manual .....	v
Liability .....	v
Revision History .....	v
<b>WARRANTY STATEMENT</b> .....	<b>vi</b>
<b>SOFTWARE SERVICE OVERVIEW</b> .....	<b>vii</b>
Software Updates and Enhancements.....	vii
<b>RETURNED MATERIAL AUTHORIZATION</b> .....	<b>viii</b>
RMA Purpose .....	viii
<b>CUSTOMER SERVICE</b> .....	<b>ix</b>
<b>COMPANY BACKGROUND</b> .....	<b>x</b>
<b>TABLE OF CONTENTS</b> .....	<b>xi</b>
<b>LIST OF FIGURES</b> .....	<b>xiv</b>
<b>LIST OF TABLES</b> .....	<b>xvi</b>
<b>SECTION 1: OVERVIEW</b> .....	<b>1-1</b>
1.1 Advantages of Full Spectrum Chirp Technology .....	1-1
1.1.1 Separate Acoustic Projectors and Receivers .....	1-1
1.1.2 High Repeatability .....	1-2
1.1.3 High Signal-to-Noise Ratio.....	1-2
1.1.4 High Resolution .....	1-2
1.1.5 Additional Processing Gain.....	1-2
1.1.6 Gaussian Shaped Amplitude Spectrum Outgoing Pulse.....	1-3
1.1.7 Reduction of Side Lobes .....	1-3
1.2 Full Spectrum Chirp Technology Applications .....	1-3
1.2.1 3100-P Portable Topside .....	1-4
1.2.2 SB-424 and SB-216S Tow Vehicles .....	1-6
1.2.3 35-Meter Kevlar Reinforced Tow Cable .....	1-7
<b>SECTION 2: SPECIFICATIONS</b> .....	<b>2-1</b>

2.1.1	3100-P Portable Topside .....	2-1
2.1.1.1	General Specifications.....	2-1
2.1.1.2	3100-P Power Requirements .....	2-1
2.1.1.3	3100-P Laptop Specifications .....	2-2
2.1.1.4	Interface between 3100-P and Laptop Computer .....	2-2
2.1.2	Tiger Board Description.....	2-2
2.1.2.1	Carrier Board .....	2-2
2.1.2.2	Acquisition Board .....	2-3
2.1.2.3	Sonar/IDE Board.....	2-3
2.1.3	SB-424 and SB-216S.....	2-6
2.2	Mechanical Drawings.....	2-7
2.2.1	35-Meter Kevlar Reinforced Tow Cable Specifications .....	2-10
<b>SECTION 3: SETUP AND ACTIVATION.....</b>		<b>3-1</b>
3.1	Unpacking and Inspection.....	3-1
3.2	Power Requirements .....	3-2
3.2.1	Use of an Uninterruptable Power Supply.....	3-2
3.2.2	Changing to a Non-US Power Plug .....	3-2
3.3	Navigation Interface .....	3-2
3.4	3100-P Portable Topside Placement.....	3-3
3.5	Topside Controls and Indicators .....	3-3
3.6	Topside Connections.....	3-5
3.7	Connecting the System Components.....	3-5
3.7.1	Connecting and Attaching the Tow Cable to the Tow Vehicle .....	3-5
3.7.2	3100-P Portable Topside Connection and Activation.....	3-7
3.7.2.1	Connecting .....	3-7
3.7.2.2	Making an Ethernet Connection .....	3-7
3.7.2.3	Activating The System .....	3-10
3.8	Pre-Deployment Tests.....	3-11
3.9	Tow Vehicle Deployment .....	3-15
3.9.1	Obtaining the Best Sonar Imagery When Towing .....	3-15
3.9.2	Conducting Sediment Classification Surveys When Towing .....	3-16
<b>SECTION 4: MAINTENANCE.....</b>		<b>4-1</b>

4.1	Portable Topside .....	4-1
4.2	Cleaning the Tow Vehicle and Tow Cable after Use .....	4-1
4.3	Inspecting and Cleaning the Underwater Connectors.....	4-1
4.4	Storage .....	4-2
4.5	Restoring the Operating System .....	4-2
4.6	Disassembling and Reassembling a Tow Vehicle.....	4-2
4.6.1	Disassembling a Tow Vehicle .....	4-4
4.6.2	Reassembling a Tow Vehicle .....	4-6
<b>SECTION 5: TROUBLESHOOTING .....</b>		<b>5-1</b>
5.1	3100-P Portable Topside Troubleshooting .....	5-2
5.2	Wiring and Connector Pin out Drawings .....	5-3
<b>APPENDIX A: SYSTEM RESTORE .....</b>		<b>A-10</b>

## LIST OF FIGURES

Figure 1-1: 3100-P Portable Topside Open with Laptop.....	1-5
Figure 1-2: 3100-P Portable Topside Internal Components .....	1-5
Figure 1-3: SB-424 and SB-216S Tow Vehicles.....	1-6
Figure 1-4: 35-Meter Kevlar Reinforced Tow Cable.....	1-7
Figure 2-1: Tiger Board Set: Carrier (Front view) – 0006013 .....	2-3
Figure 2-2: Tiger Board Set: Carrier (Rear View) – 0006013 .....	2-4
Figure 2-3: Tiger Board Set: Acquisition PCB - 0014231 .....	2-4
Figure 2-4: Tiger Board Set: SIBU aka Sonar Interface Board – 0011637 .....	2-5
Figure 2-5: SB-216 Towfish Outline Drawing .....	2-8
Figure 2-6: SB-424 Towfish Outline Drawing .....	2-9
Figure 3-1: 3100-P Portable Topside Side Panel .....	3-4
Figure 3-2: Reinforced Cable Attached to SB-216S Tow Vehicle .....	3-6
Figure 3-3: Recommended Method for Dressing and Strain Relieving Tow Cable.....	3-6
Figure 3-4: 3100-P Network Configuration Diagram .....	3-8
Figure 3-5: Wireless TCP/IP Address.....	3-9
Figure 3-6: Portable Processor Case Interface.....	3-10
Figure 3-7: The DISCOVER Sub-Bottom Main Window.....	3-12
Figure 3-8: Successful Self-Test.....	3-12
Figure 3-9: NET: ON.....	3-13
Figure 3-10: The Sub-Bottom Control Tab.....	3-13
Figure 3-11: Tap Test.....	3-14
Figure 4-1: SB-424 and SB-216S Tow Vehicle Internals .....	4-3
Figure 4-2: Retaining Ring and Locking Sleeve Removed .....	4-4
Figure 4-3: Male Connector .....	4-4
Figure 4-4: Removing the 7/16-Inch Bolts Securing the Teardrop Cover to the Tow Vehicle.....	4-5
Figure 4-5: Removing the Teardrop Cover.....	4-5
Figure 4-6: Teardrop Cover Removed.....	4-6
Figure 4-7: Removing 7/16 and ½ Inch Bolts and Nuts.....	4-6
Figure 5-1: 35M Tow Cable Diagram – 0002899.....	5-4
Figure 5-2: 3100-P Topside Interconnect – 0004674.....	5-5
Figure 5-3: Wiring Diagram, Spider Box, SB-424 Tow Vehicle .....	5-6
Figure 5-4: Wiring Diagram, SB-424 Tow Vehicle .....	5-7

Figure 5-5: Wiring Diagram, Spider Box, SB-216S Tow Vehicle .....5-8  
Figure 5-6: Wiring Diagram, SB-216S Tow Vehicle .....5-9

## LIST OF TABLES

Table 2-1: General Specs for 3100-P Portable Topside .....	2-1
Table 2-2: Power Requirements .....	2-1
Table 2-3: Laptop Specifications .....	2-2
Table 2-4: 3100-P / Notebook Computer Interface .....	2-2
Table 2-5: Tow Vehicle Specifications.....	2-6
Table 2-6: 35-Meter Kevlar Reinforced Tow Cable Specifications.....	2-10
Table 3-1: AC Power Cord Wiring .....	3-2
Table 5-1: 3100-P Portable Topside Troubleshooting .....	5-3

## SECTION 1: OVERVIEW

The 3100-P Sub-Bottom Profiling System is a lightweight, portable, high resolution wideband frequency modulated (FM) sub-bottom profiler that uses EdgeTech's proprietary Full Spectrum chirp technology to generate cross-sectional images of the seabed and collect digital normal incidence reflection data over many frequency ranges. The 3100-P transmits an FM pulse (also called a "chirp pulse") that is linearly swept over a full spectrum frequency range.

The reflections measured by the system are displayed as shades of gray or color on a computer monitor and may be printed on a continuous feed thermal printer. Data are stored in real time onto a large capacity hard drive and can be archived to a DVD.

### 1.1 Advantages of Full Spectrum Chirp Technology

EdgeTech's Full Spectrum chirp technology has several distinct advantages over conventional sub-bottom profiling systems: The use of separate acoustic projectors and receivers enable:

- Simultaneous transmission and reception of acoustic signals
- High repeatability of the transmitted signals to enable sediment classification,
- High signal-to-noise ratio (SNR) for improved acoustic imagery
- High resolution for measurement of fine sediment layering
- Additional processing gain for energy efficiency
- Gaussian shaped amplitude spectrum of the outgoing pulse to preserve resolution with sediment penetration
- Reduction of side lobes for minimal destructive signal scattering caused by the sediment when profiling near the bottom.

#### 1.1.1 Separate Acoustic Projectors and Receivers

The 3100-P Sub-Bottom Profiling System uses acoustic projectors and receivers mounted in a towed vehicle to transmit and receive acoustic FM pulse signals. The projectors are wide band piston type transducers, and the receivers are hydrophone arrays composed of lead zirconate titanate (PZT) crystals. The transducers are mounted in the forward section of the tow vehicle, and the hydrophone arrays, which are designed for profiling at ship speeds up to seven knots, are mounted aft.

The use of separate transmitting transducers and receiving hydrophone arrays preserves linearity, and allows the simultaneous transmission and reception of the acoustic signals. The transducers and hydrophone arrays are mounted beneath acoustic baffles, which minimize direct path, tow vehicle, and surface reflections. A preamplifier in the tow vehicle amplifies and drives the received signals through a tow cable to the surface.

### 1.1.2 High Repeatability

The FM pulses are generated by a digital-to-analog (D/A) converter with a wide dynamic range and a transmitter with linear components. This allows the energy, amplitude, and phase characteristics of the acoustic pulses to be precisely controlled. This precision produces high repeatability and signal definition required for sediment classification.

The frequency range of operation is determined by the acoustic characteristics of the transmitter transducers and receiving hydrophone arrays mounted on the tow vehicle. Each tow vehicle can transmit acoustic pulses with different center frequencies and bandwidths.

The selection of this frequency is made by the operator while profiling to achieve the best imagery, and the tow vehicle is selected based on the sub-bottom conditions at the survey site, along with the type of sub-bottom features that need to be imaged. EdgeTech technical support can provide assistance in selecting the best tow vehicle for your application.

### 1.1.3 High Signal-to-Noise Ratio

Full Spectrum chirp technology does not use a conventional matched filter (the correlation filter that is widely used to compress FM signals) to process wide band signals. Rather it uses proprietary amplitude and phase weighting functions for the transmitted pulse and a pulse compression filter that maximizes the SNR of the acoustic images over a wide band of operating frequencies. These functions provide a significant SNR improvement in the acoustic image over other pulse and chirp sonars with band limited components that are limited in dynamic range.

### 1.1.4 High Resolution

Signals received at the surface from the hydrophone arrays in the tow vehicle pass through a software-controlled, programmable, gain amplifier before being digitized with a 16-bit analog-to-digital (A/D) converter at a sampling rate of 20, 25, 40, or 50 kHz. The FM pulse is then compressed using a digital compression filter. This correlation process is implemented in real time with forward and inverse Fast Fourier Transforms.

The compressed pulse has a time duration approximately equal to the inverse of the bandwidth of the FM pulse which results in a high temporal resolution. This high resolution enables the measurement of fine layering in the sediment, an important factor in sediment classification, as it provides a more realistic picture of the true geologic variability of the sea floor and an accurate determination of the depositional processes.

### 1.1.5 Additional Processing Gain

In addition to the resolution improvement, correlation processing achieves a signal processing gain over the background noise. This gain is approximately ten times the log of the time-bandwidth product.

This improvement is due to the signal having a time duration longer than the inverse of the bandwidth, thus increasing signal energy without increasing the power of the outgoing pulse. To equal the typical performance of the full spectrum sonar pulse, conventional pulse sonar would have to operate at a peak pulse power of 100 times greater than a full spectrum pulse with a time-bandwidth product of 100.

### 1.1.6 Gaussian Shaped Amplitude Spectrum Outgoing Pulse

Another important feature of Full Spectrum chirp technology is that the signal processing optimizes the performance of the system. The sonar contains many components, each with a unique dynamic range and linearity characteristic, which are frequency dependent.

In addition to this characteristic, the amplitude spectrum of the outgoing pulse is chosen to be approximately Gaussian in shape to limit the side lobe level and temporal resolution losses due to attenuation. As a wavelet with a Gaussian shaped spectrum is attenuated by the sediment, energy is lost but its bandwidth is nearly preserved. Therefore, even after being attenuated by sand, the acoustic pulse has approximately the same resolution as an unattenuated pulse.

### 1.1.7 Reduction of Side Lobes

Use of Full Spectrum chirp technology reduces the side lobes in the effective transducer aperture. The wide bandwidth of the sweep frequency has the effect of smearing the side lobes of the transducer and thus achieving a beam pattern with virtually no side lobes. The effective spatial beam width obtained after processing a full spectrum 2–10 kHz signal, for example is 20 degrees measured at the -3db points.

## 1.2 Full Spectrum Chirp Technology Applications

Applications of the Full Spectrum Chirp Technology used in the 3100-P Sub-Bottom Profiling System include:

- EEZ resource development
- Imaging fluidized mud to a resolution of 8 cm
- Sediment classification
- Buried pipeline and cable location and routing
- Dredging studies for inlets
- Scour/erosion surveys in rivers and streams
- Marine geotechnical surveys
- Bridge erosion surveys
- Hazardous waste target location
- Geological surveys
- Archeological surveys

- Hazard surveys
- Mining and dredging surveys
- Bridge and shoreline scour surveys
- Imaging biologics in water column
- Mapping clam populations
- Beach re-nourishment
- Military and offshore oil applications
- Full ocean depth sub-bottom imaging (hull mount systems)
- Environmental site investigations

### 1.2.1 3100-P Portable Topside

The 3100-P Portable Topside has its electronics housed in a heavy-duty case that is watertight when closed. The case also holds a provided laptop computer that runs the DISCOVER acquisition software

**CAUTION!**

Never attempt to ship portable topside units in their Storm Case alone. Although rugged, these cases are not intended to be used as shipping containers, and the delicate internal components could be damaged if used in this manner.

**FIGURE 1-1** and **FIGURE 1-2** display the portable topside and its internal components.



Figure 1-1: 3100-P Portable Topside Open with Laptop

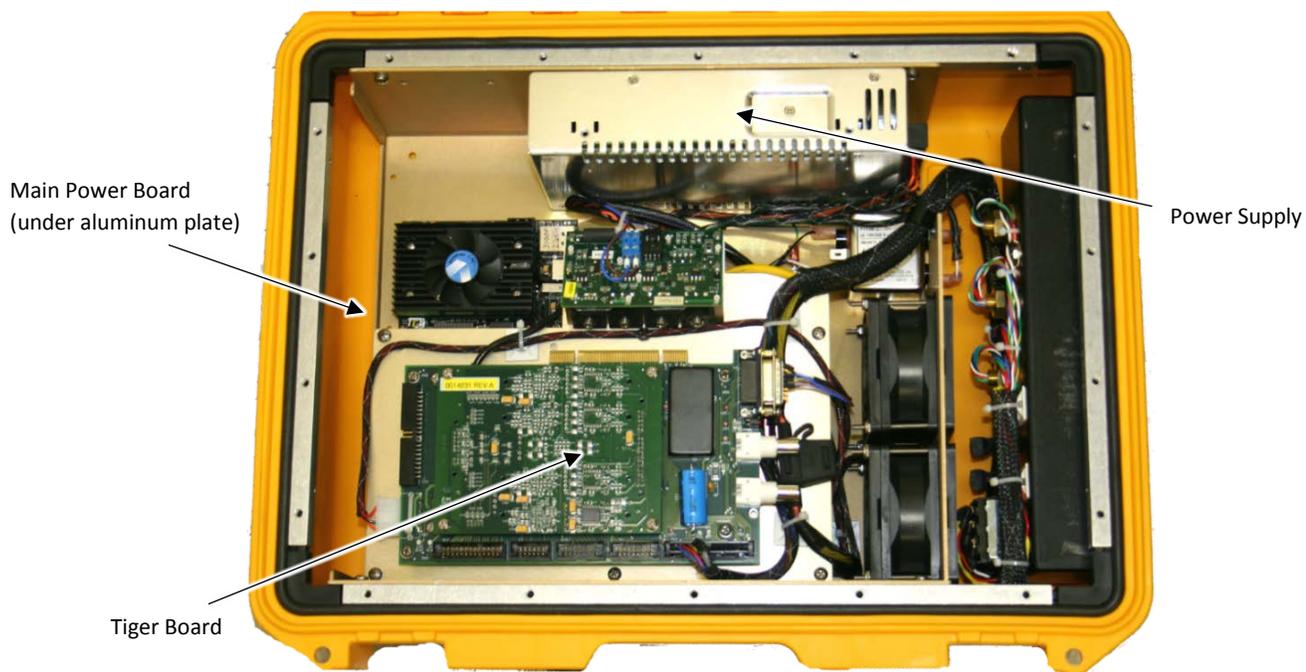


Figure 1-2: 3100-P Portable Topside Internal Components

## 1.2.2 SB-424 and SB-216S Tow Vehicles

The SB-424 and SB-512i Tow Vehicles are each designed to operate over a specific frequency range, and as lower operating frequencies generally require longer hydrophone arrays and larger transducers, the vehicles differ primarily in size and weight.

The SB-424 Tow Vehicle, which is the smaller of the two, operates over a frequency range of 4–24 kHz, while the SB-216S operates at 2–16 kHz. Both vehicles are displayed in **FIGURE 1-3**. The two vehicles are hydrodynamically stable, with the transducers and hydrophone arrays mounted under an acoustic baffle to reject downward traveling multiple echoes. These components, along with "spider" cable harnesses and a preamplifier, are enclosed in a two-piece fiberglass shell that is fitted with stabilizing fins and lead ballast.

A hinged U-framed tow bridle is used for towing, and the tow point location can be adjusted to accommodate different towing speeds and depths. The tow vehicles are each shipped in a wooden crate.



**SB-424 Tow Vehicle**



**SB-216S Tow Vehicle**

*Figure 1-3: SB-424 and SB-216S Tow Vehicles*

### 1.2.3 35-Meter Kevlar Reinforced Tow Cable

The 3100-P system comes standard with a 35 Meter Tow Cable, shown in **FIGURE 1-4**. The cable is Kevlar Reinforced, and includes three twisted shielded wire pairs. This cable is used to connect to and tow the SB-424 and SB-216S Tow Vehicles.

A steel cable can be attached to the tow cable to increase the life of the tow cable, which has a tensile strength of 650 pounds

The tow cable includes a cable grip for attaching to the tow bridle of the tow vehicle and is shipped in a wooden crate with the tow vehicle.

The system can handle a maximum length of 100 meters of tow cable. For more information on additional tow cable options, contact **EDGETECH CUSTOMER SERVICE**.



*Figure 1-4: 35-Meter Kevlar Reinforced Tow Cable*



## SECTION 2: SPECIFICATIONS

The specifications for the 3100-P Sub-Bottom Profiling System include electrical, mechanical, and environmental characteristics for the Portable Topside Processor, Laptop, SB-424 and SB-216S Tow Vehicles, and the 35-Meter Kevlar Reinforced Tow Cable.

**NOTE:** All specifications are subject to change without notice.

### 2.1.1 3100-P Portable Topside

Specifications for the 3100-P Portable Topside are as follows:

#### 2.1.1.1 General Specifications

The general specifications for the 3100-P Portable Topside processor are shown in **TABLE 2-1**.

SPECIFICATION	VALUE
<b>Size</b>	390 D x 490 W x 190 H (mm), 15.2 D x 19.2 W x 7.3 H (inches)
<b>Weight</b>	13 kg (30 lbs) with jetBook Computer, 10 kg (22 lbs) without jetBook Computer
<b>Construction</b>	High-impact structural polypropylene
<b>Color</b>	Yellow
<b>Sealing</b>	Watertight cover O-ring seal with purge valve
<b>Open Cover Operating Temperature</b>	0°C to 40°C (32°F to 104°F) (shade conditions)
<b>Storage Temperature</b>	-20°C to 60°C (-4°F to 140°F)
<b>Relative Humidity</b>	Operating 0 to 80% (non-condensing), Non-operating 0 to 100%

*Table 2-1: General Specs for 3100-P Portable Topside*

#### 2.1.1.2 3100-P Power Requirements

The 3100-P Power Requirements are listed in **TABLE 2-2**.

SPECIFICATION	VALUE
<b>DC Input</b>	12 to 15 VDC
<b>AC Input</b>	120/240 VAC (Auto-Ranging)
<b>Peak Power (on start-up)</b>	300 Watts 20 Amps at 12 VDC / 2 Amps at 120 VAC
<b>Average Operating Power</b>	48 Watts 4 Amps at 12 VDC 0.4 Amps at 120 VAC

*Table 2-2: Power Requirements*

### 2.1.1.3 3100-P Laptop Specifications

The 3100-P Laptop specifications are in [TABLE 2-3](#).

SPECIFICATION	VALUE
<b>Notebook Computer</b>	Jetta SR JetBook, or equivalent
<b>Operating System</b>	Windows 7, 64 Bit
<b>Processor</b>	I7, 2.8GHZ Quad Core
<b>Memory</b>	4 GB, 1333 MHZ
<b>Hard Drive</b>	500 Gigabytes
<b>Screen Size</b>	15.6" – 1280 x 800 typical
<b>Wireless</b>	Windows 7 64 BIT CENTRINO 802.11 BGN 2x2 or Comparable

*Table 2-3: Laptop Specifications*

### 2.1.1.4 Interface between 3100-P and Laptop Computer

The specifications for the interface between the 3100-P / Notebook computer are in [TABLE 2-4](#).

SPECIFICATION	VALUE
<b>Ethernet LAN</b>	100BaseT, TCP/IP Wireless
<b>Wireless LAN</b>	802.11 b/g

*Table 2-4: 3100-P / Notebook Computer Interface*

## 2.1.2 Tiger Board Description

The Sonar Interface board (Tiger board) is the real-time controller for sonar processing. It includes transmit waveform tables and multiple channels of 10-bit high speed digital-to-analog (D/A) converters, support for external and internal triggers, and support for multiple sonar analog-to-digital (A/D) converters.

The Tiger board was designed to support a combined sonar system (with both sub-bottom as well as multi-frequency side-scan capability), or to be used single channel as a basic sub-bottom controller. At periodic intervals the board generates the transmit waveform(s), and it continuously buffers ADC data.

The Tiger board represents a new generation of re-engineered and optimized sonar electronics. It is designed to address a broad spectrum of sonar applications from a common and well tested base of components. Among the features of this generation are lower power consumption, higher speeds, smaller form factors, and high analog sensitivity-to-minimum noise electronics for improved operating ranges.

The Tiger board is actually composed of a set of three boards as shown in [FIGURE 2-1](#): a Carrier board, an Acquisition board, and a Sonar/IDE board. All three boards are connected electrically and mechanically as a single assembly that plugs into the Mother board PCI slot.

### 2.1.2.1 Carrier Board

This board has the same physical size as an industry standard full slot PCI card. There are two BNC connectors, TRIGGER IN and TRIGGER OUT, and female connectors on either side for mating with the

other two boards in the board set. An onboard DC/DC converter provides +12 VDC to the preamplifier in the tow vehicle.

### 2.1.2.2 Acquisition Board

The Acquisition board contains band pass filtering and up to eight 24-bit A/D converters, where only two channels are used. The first channel is for the received acoustic data from the preamplifier, and the second channel is used for power-up diagnostics.

### 2.1.2.3 Sonar/IDE Board

The sonar/IDE board is composed of two RAM memories, an acquisition memory and a chirp memory, and six 10-bit D/A converters for generating transmit waveforms. The transmit ping rate and sampling clock are generated from this board. The IDE portion of the board provides the interfacing circuitry required to communicate between the Mother board and the Tiger board.

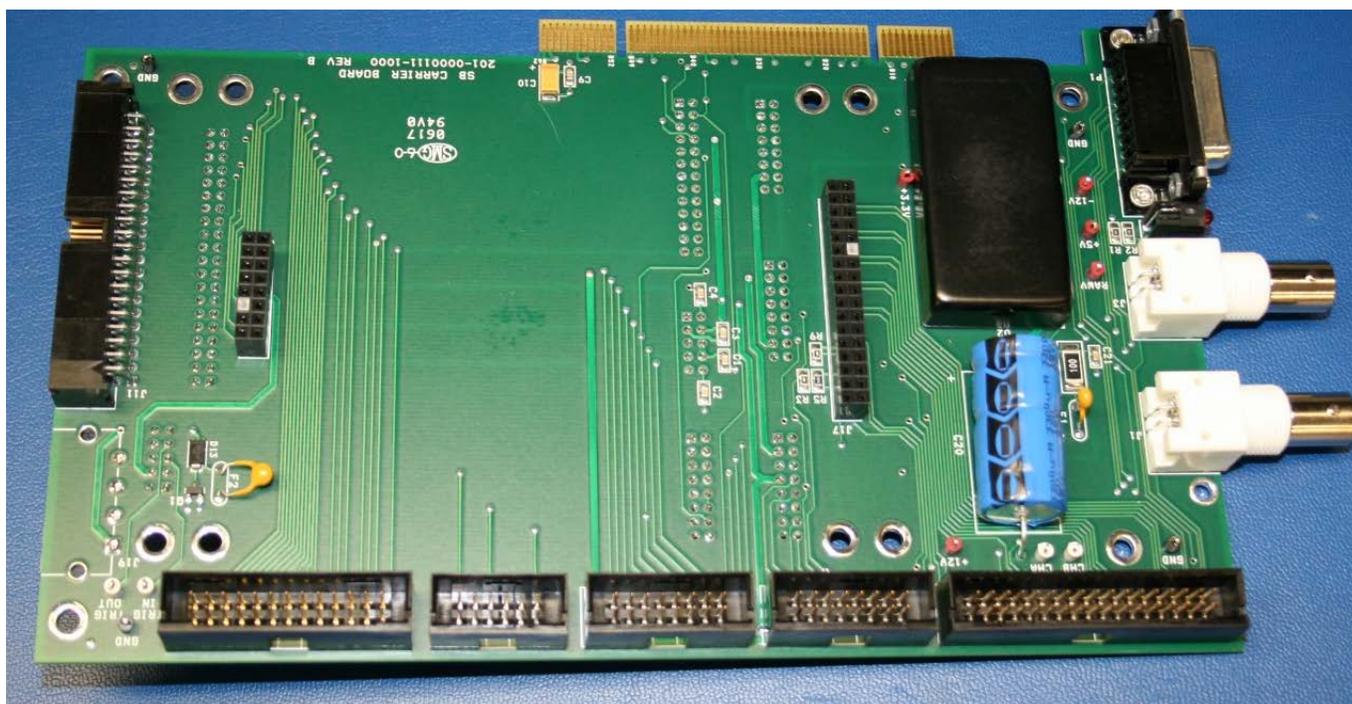


Figure 2-1: Tiger Board Set: Carrier (Front view) – 0006013



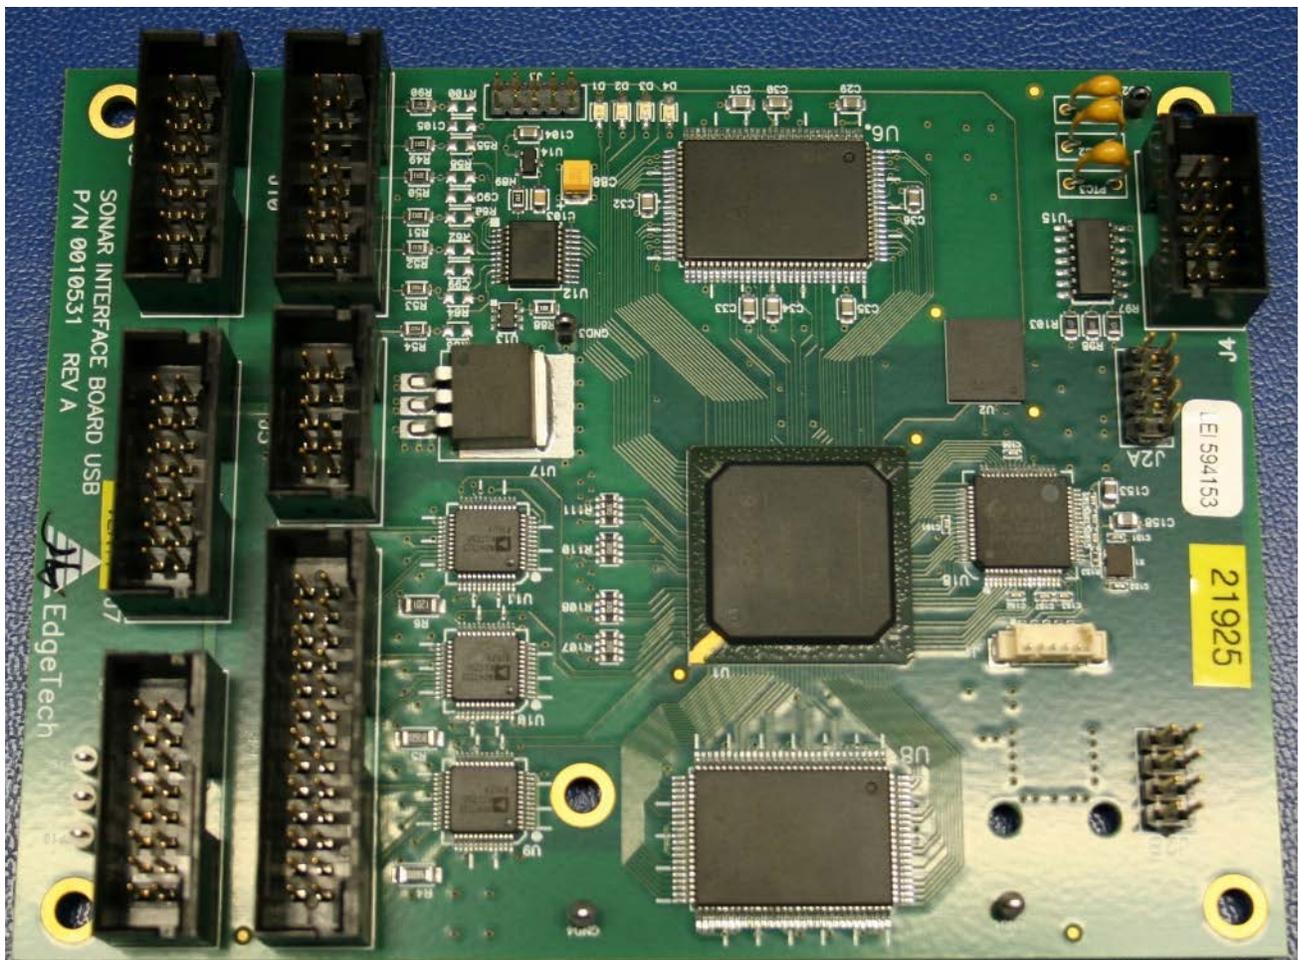


Figure 2-4: Tiger Board Set: SIBU aka Sonar Interface Board – 0011637

### 2.1.3 SB-424 and SB-216S

The general specifications for the SB-424 and SB-216S Tow Vehicles are show in [TABLE 2-5](#).



SPECIFICATION	SB-424 VALUE	SB-216S VALUE
Frequency range	4-24 kHz	2-16 kHz
Pulse type	FM	FM
Pulse bandwidth/pulse length	4-24 kHz/10 ms 4-20 kHz/10 ms 4-16 kHz/10 ms	2-15 kHz/20 ms 2-12 kHz/20 ms 2-10 kHz/20 ms
Calibration	Gaussian-shaped pulse spectrum	Gaussian-shaped pulse spectrum
Vertical resolution <sup>a</sup>	4 cm (4–24 kHz) 6 cm (4–20 kHz) 8 cm (4–16 kHz)	6 cm (2–15 kHz) 8 cm (2–12 kHz) 10 cm (2–10 kHz)
Penetration in coarse and calcareous sand <sup>b</sup>	2 m (typ)	6 m (typ)
Penetration in soft clay <sup>b</sup>	40 m	80 m
Beam width	16°, 4–24 kHz 19°, 4–20 kHz 23°, 4–16 kHz	17°, 2–15 kHz 20°, 2–12 kHz 24°, 2–10 kHz
Optimum tow vehicle pitch/roll <sup>c</sup>	<7°, 4–24 kHz <8°, 4–20 kHz <10°, 4–16 kHz	<7°, 2–15 kHz <8°, 2–12 kHz <10°, 2–10 kHz
Optimum tow height	3-5m above sea floor	3-5 m above sea floor
Transmitters	1	1
Receive arrays	2	2
Output power	2000 W	2000W
Tow vehicle size	77 cm (30 in.) L 50 cm (20 in.) W 34 cm (13 in.) H	105 cm (41 in.) 67 cm (26 in.) W 46 cm (18 in.) H
Shipping container size	91 cm (36 in.) L 66 cm (26 in.) W 64 cm (25 in.) H	117 cm (46 in.) L 79 cm (31 in.) W 61 cm (24 in.) H
Weight in air	35 kg (78 lb)	72 kg (160 lb)
Shipping weight	110 kg (243 lb)	162 kg (357 lb)
Tow cable requirements	3 shield-twisted wire pairs	3 shield-twisted wire pairs
Depth rating	300 m (984 ft) max	300 m (984 ft) max

Table 2-5: Tow Vehicle Specifications

- a. Vertical resolution is the smallest distinguishable distance between the peaks of two reflections that can be displayed on the screen as separate reflectors. Sound energy is reflected back to the sonar system when the transmitted pulse encounters a change in density. The resolution of a sonar system is measured by its ability to distinguish between two adjacent targets. The vertical resolution is dependent on the transmitted chirp pulse bandwidth. It is theoretically calculated by the product of the transmitted pulse length (inverse of the bandwidth) and half the speed of sound in water (approximately 750 m/s). For example, a full bandwidth pulse from an SB-424 Tow Vehicle has a vertical resolution of 3.75 cm ( $1/20,000 \times 750$ ).
  - b. The value for sub-bottom penetration is the maximum distance beneath the sea floor that a step change of 10% in density can be seen on the sub-bottom display. This assumes that the sediment is gas free (no organic materials), that the lowest frequency of the pulse spectrum is transmitted and that the vehicle is within 5 meters of the seabed (range for maximum penetration). Lower frequencies reduce attenuation (absorption of sound). Towing the vehicle close to the sea floor reduces the acoustic footprint thereby reducing scattering (interfering reflections) from the sea floor and within the sediments.
  - c. At the -3 dB points, depending on the center frequency.
- 

## 2.2 Mechanical Drawings

The following pages contains Drawings for the SB-216 and SB-424.

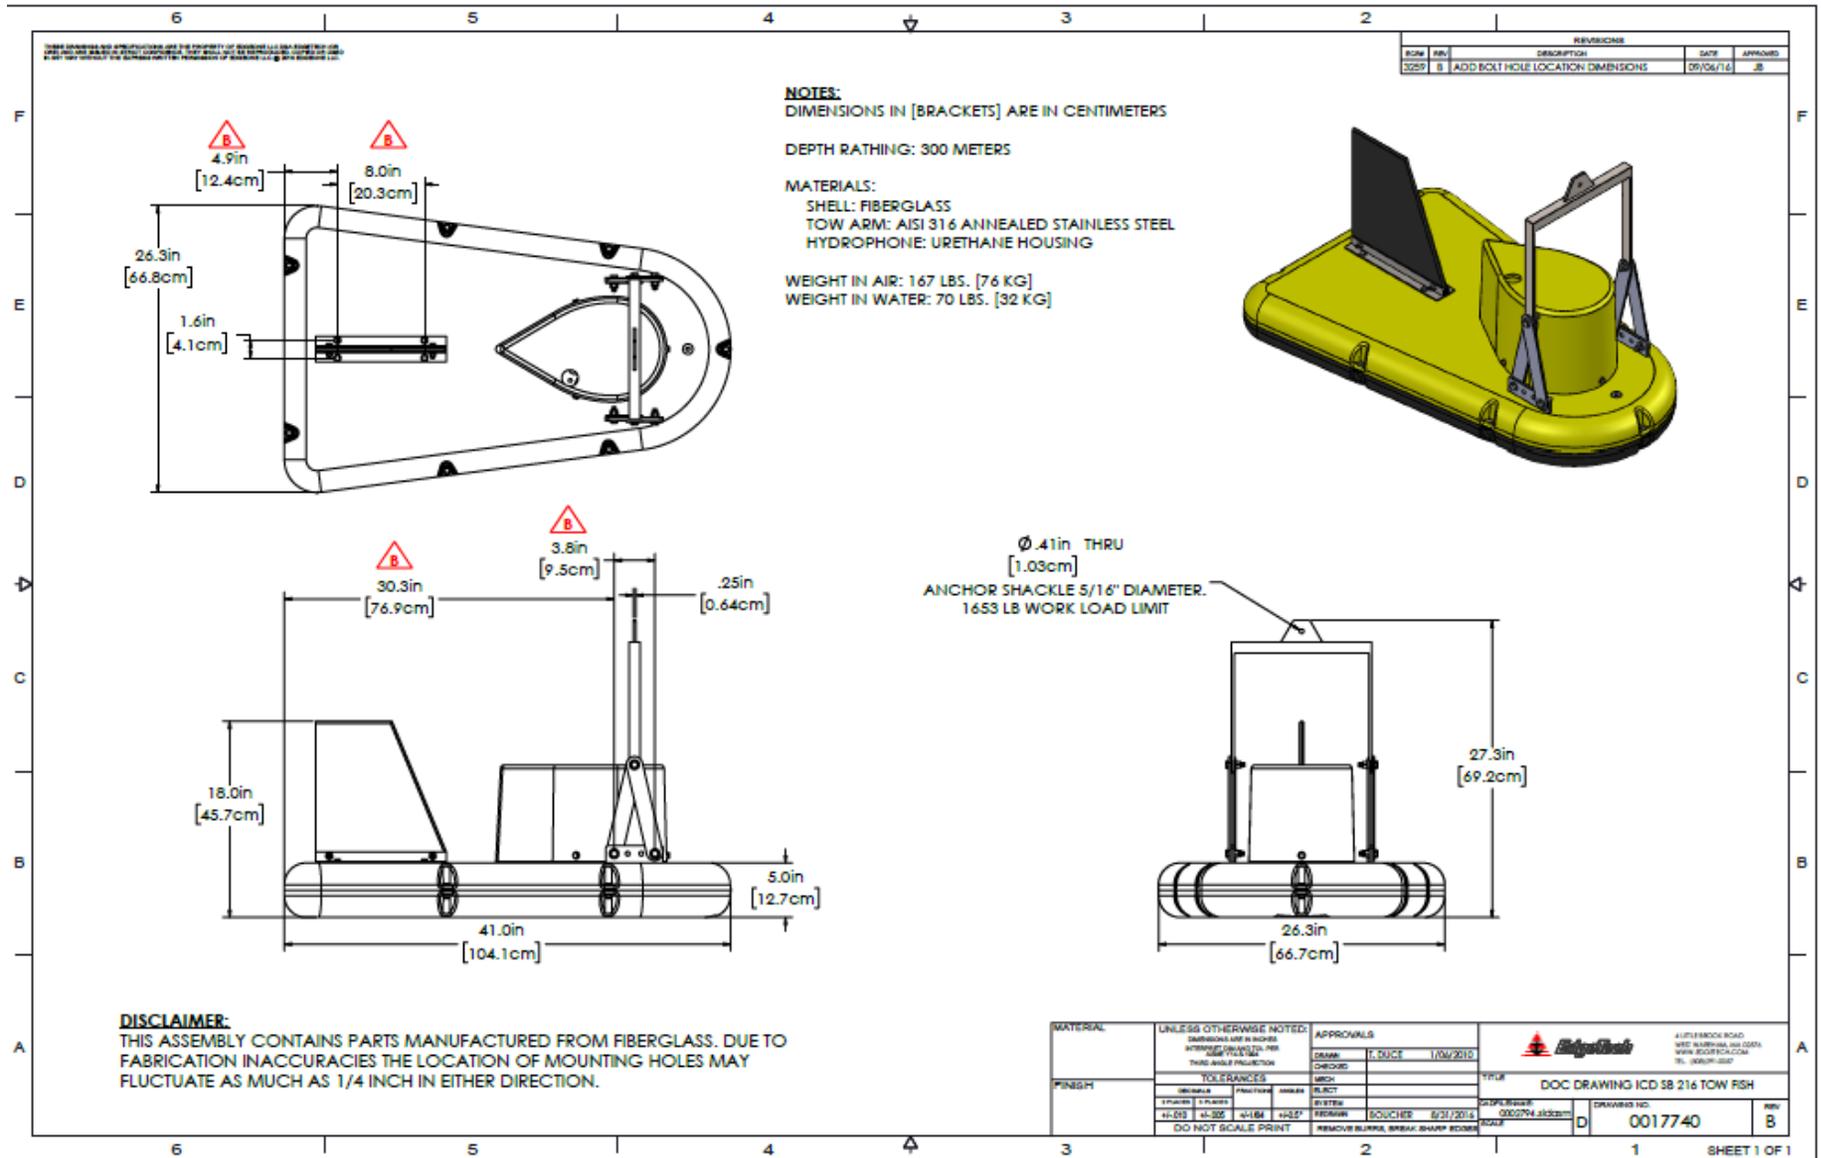


Figure 2-5: SB-216 Towfish Outline Drawing

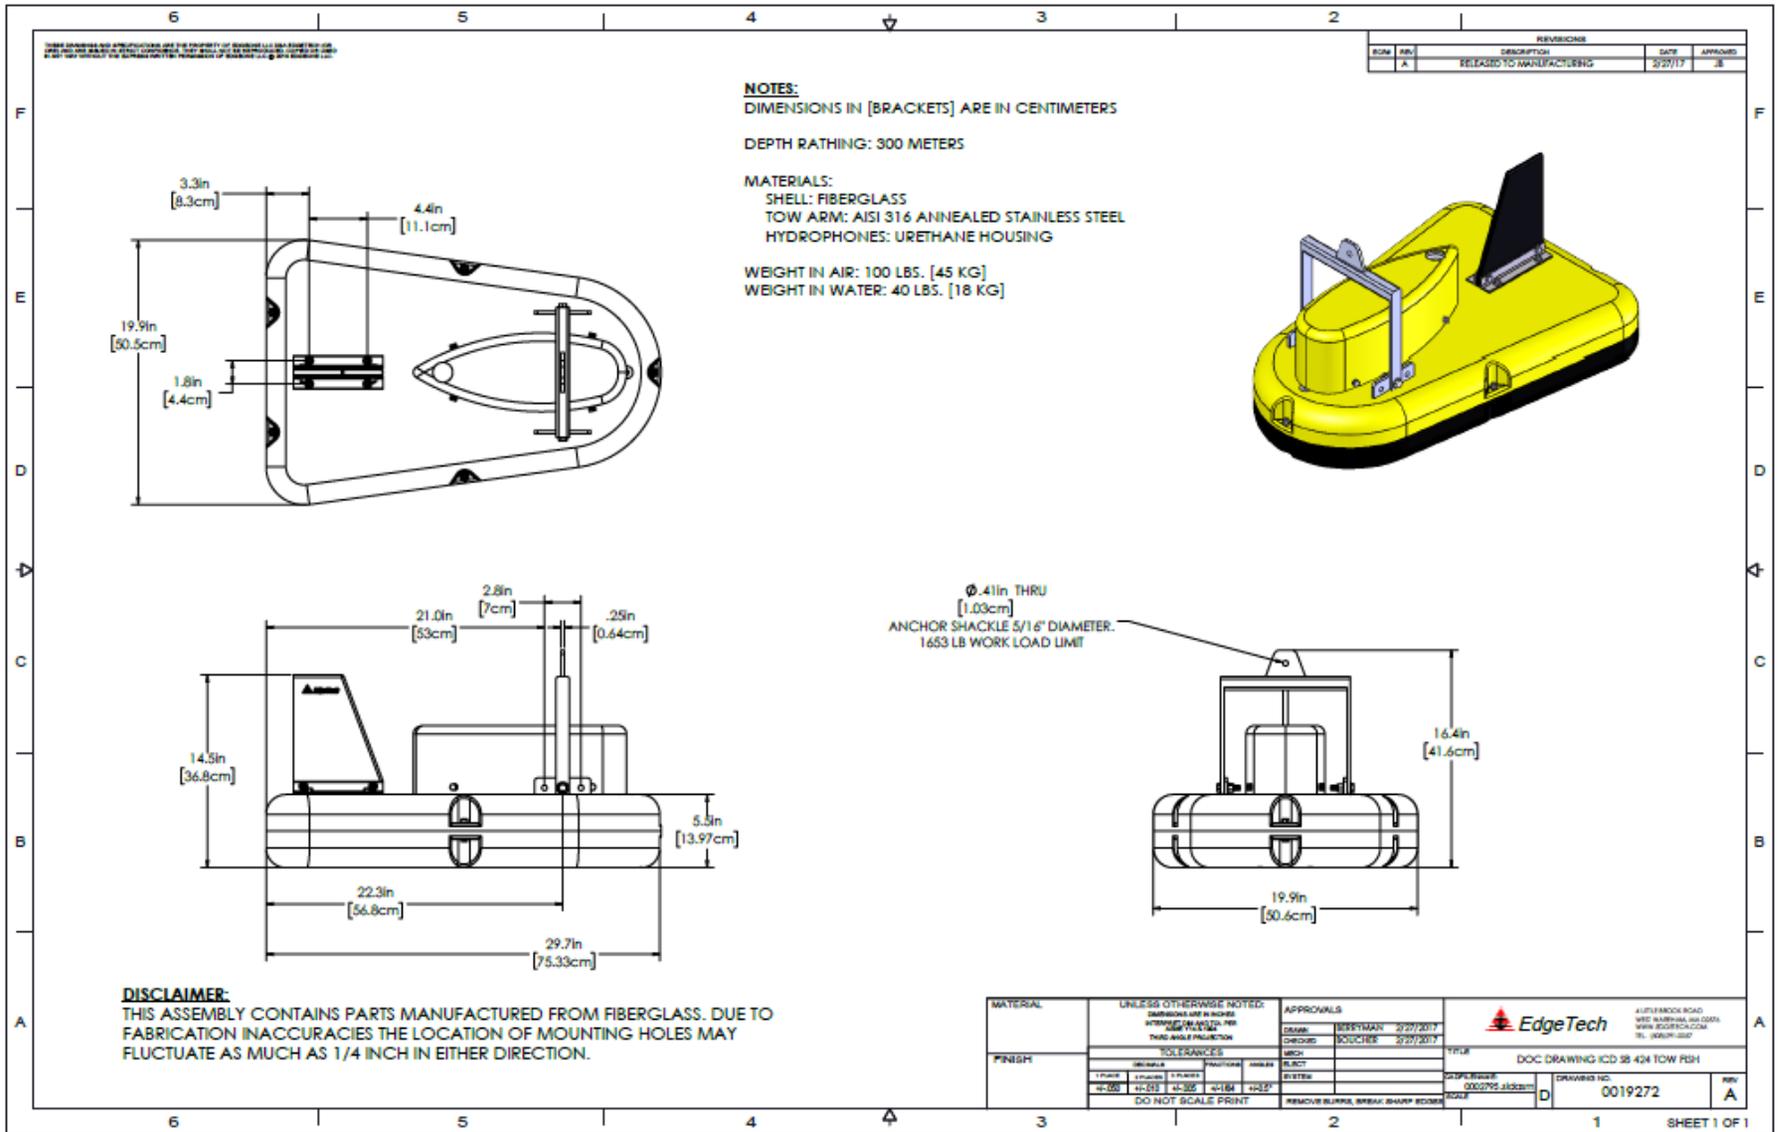


Figure 2-6: SB-424 Towfish Outline Drawing

### 2.2.1 35-Meter Kevlar Reinforced Tow Cable Specifications

The general specifications for the 35-Meter Kevlar Reinforced Tow Cable are shown in **TABLE 2-6**.

SPECIFICATION	VALUE
Twisted-shielded wire pairs:	(1) # 16 AWG (2) # 20 AWG
Breaking strength:	1,500 kg (3,300 lb) minimum
Working strength:	300 kg (660 lb)
Weight in air:	94 kg/100 m (207 lb/1000 ft)
Voltage rating:	600 volts
Bending radius:	25 cm (10 in.) minimum
Length:	35 m (115 ft) standard

*Table 2-6: 35-Meter Kevlar Reinforced Tow Cable Specifications*

**NOTE:** Cables do not come standard with the system and must be specified upon purchase. For more information about cable options, contact **EDGETECH CUSTOMER SERVICE**.

## SECTION 3: SETUP AND ACTIVATION

Setup and test of the EdgeTech 3100-P Sub-Bottom Profiling System involves:

1. Unpacking, inspecting, and connecting the system components.
2. Connecting a navigation system and external sonar systems if required
3. Activating the system
4. Verifying operation using the EdgeTech DISCOVER SB software.

This section provides instructions on how to perform these tasks, as well as information on how to deploy and tow the tow vehicle.

### 3.1 Unpacking and Inspection

The 3100-P Portable Topside; SB-424 or SB-216S Tow Vehicle; and 35-Meter Kevlar-Reinforced Tow Cable are shipped in separate, reusable, heavy-duty transport cases. Essential cables and documentation are also included.

Before unpacking the system components, inspect the shipping containers for any damage. Report any damage to the carrier and to EdgeTech. If the shipping containers appear free of damage, carefully unpack the components, and inspect them for damage. Also check the packing list and verify that all the items on the list are included.

Again, if any damage is found, report it to the carrier and to EdgeTech. If any items are missing, immediately contact EdgeTech. Do not install or operate any equipment that appears to be damaged.

Although the items shipped may vary, depending on the customer requirements, the 3100-P Sub-Bottom Profiling System typically includes the following:

- 3100-P Portable Topside
- Laptop Computer
- SB-424 or SB-216S Tow Vehicle
- 35-Meter Kevlar Reinforced Tow Cable
- AC power cords (1)
- DC power / Ethernet cable
- Recovery thumb drive
- Software CDs and Electronic Manuals
- Consumables kit

After unpacking the system components, be sure to safely store the shipping containers, including any packing materials, for later use. When transporting or storing the system, all items should be packed in

their original shipping containers in the same way they were originally shipped, and always store the system in a dry environment when not in use.

## 3.2 Power Requirements

The 3100-P power requirements are 120–220 VAC, 50/60 Hz or a 12 to 15 VDC power supply. The input voltage is auto sensing.

### 3.2.1 Use of an Uninterruptable Power Supply

The power source should be continuously free of high amplitude, high frequency transients, as this type of interference could cause degraded performance or damage to the equipment. An uninterruptable power supply (UPS) with power surge protection is recommended for powering the equipment.

However, whether or not a UPS is used, the power source should never be the same as that being used to power electric motors, such as pumps and winches, on the survey vessel.

### 3.2.2 Changing to a Non-US Power Plug

An AC power cord is provided for connecting the 3100-P Portable Topside to a standard U.S. 3-pronged outlet. For non-U.S. power outlets, you can modify this cord by cutting off the 3-pronged plug and attaching the appropriate plug. Refer to **Table 3-1** for connection information.

AC POWER CORD WIRE COLOR	FUNCTION
Black	AC line
White	AC neutral
Green	Earth ground

*Table 3-1: AC Power Cord Wiring*

## 3.3 Navigation Interface

The 3100-P Sub-Bottom Profiling System accepts all standard National Marine Electronics Association (NEMA) 0183 message sentence formats from a connected global positioning system (GPS) or integrated navigation system.

## 3.4 3100-P Portable Topside Placement

Ideally, the portable topside will always be located in a dry, sheltered area that is protected from weather and water spray. However, the rugged design of the unit allows it to be exposed to light precipitation when the case is sealed.

### CAUTION!

Never operate or open the unit where it can become wet from sea spray or precipitation.

The unit should also be placed in an area where the temperature is consistently between 0°C and 40°C (32°F and 104°F). Avoid areas of direct sunlight, especially in tropical environments, as heat buildup could occur and viewing the laptop display and status indicators could be difficult. The location should also enable direct communications with the deck crew that is handling the tow vehicle.

## 3.5 Topside Controls and Indicators

The 3100-P Portable topside controls and indicators are called out in [FIGURE 3-1](#), and are as follows:

- |                         |  |
|-------------------------|--|
| <b>POWER SWITCH:</b>    | Turns on the system.   |
| <b>READY INDICATOR:</b> | Green LED that lights up solid and remains on when the system is ready to run.   |
| <b>PING INDICATOR:</b>  | Yellow LED lights up during startup to show that the system is initializing, then shuts off. Once the system has begun pinging, the LED blinks continuously. |
| <b>POWER INDICATOR:</b> | Red LED that indicates the system has power going to it.   |

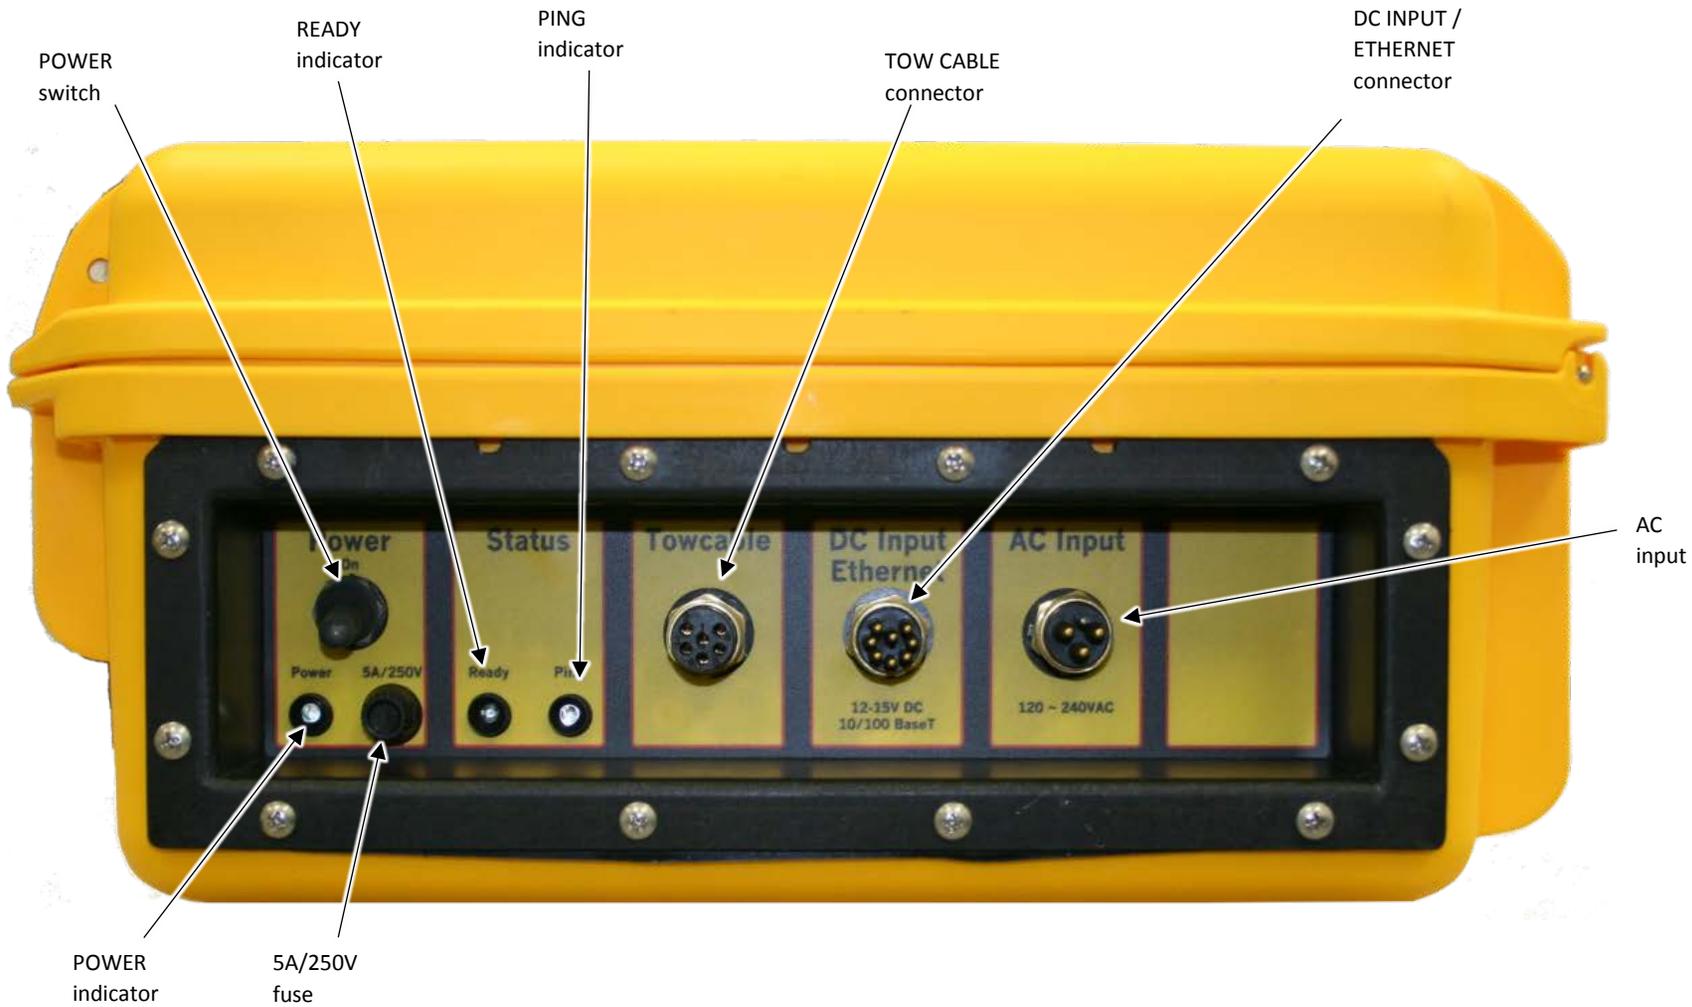


Figure 3-1: 3100-P Portable Topside Side Panel

## 3.6 Topside Connections

The connections for the 3100-P Portable Topside Processor are called out in **FIGURE 3-1** explained below:

<b>TOW CABLE:</b>	6-prong female connector where the tow cable enters the portable topside.
<b>DC INPUT/ETHERNET:</b>	8-prong male input where DC power cable can be connected. Also used for creating a wired connection with the laptop computer.
<b>AC INPUT:</b>	3-prong male connector that attaches to the AC input wire.
<b>5A / 250 V FUSE:</b>	Fuse access for the topside to be replaced in the event of a short.

## 3.7 Connecting the System Components

### **WARNING!**

Do not connect the tow cable to the 3100-P Portable Topside before connecting it to the tow vehicle, otherwise injury or death can occur if the exposed connector on the tow cable is energized. Always connect the tow cable to the tow vehicle first.

### 3.7.1 Connecting and Attaching the Tow Cable to the Tow Vehicle

A 35-Meter Kevlar Reinforced Tow Cable is shown connected and attached to a SB-216S Tow Vehicle in **FIGURE 3-2**, and is similar to that for the SB-424 Tow Vehicle. Shown in **FIGURE 3-3** is the recommended method for dressing and strain relieving the tow cable.

To connect and attach the tow cable to the tow vehicle:

1. Verify that the tow cable is not connected to the portable topside.
2. Coil the tow cable in a figure eight configuration.
3. Verify that the tow cable and tow vehicle connectors are free of corrosion or dirt. If dirty, clean them with an alcohol wipe.
4. Apply a thin film of silicone grease to the pins of the tow vehicle tow cable connector.
5. Mate the connectors by pressing them firmly together. Do not wiggle the connectors.
6. Mate the connector locking sleeves.
7. Connect the eyelet of the cable grip to the shackle on the tow bridle and secure them with seizing wire or a tie wrap.

8. Secure the tow cable to the tow bridle using tie wraps. Electrical tape can also be used for this purpose.
9. Secure the cable pigtail to tow bridle ensuring that there is proper strain relief and that the connector does not strum or move in the water current.

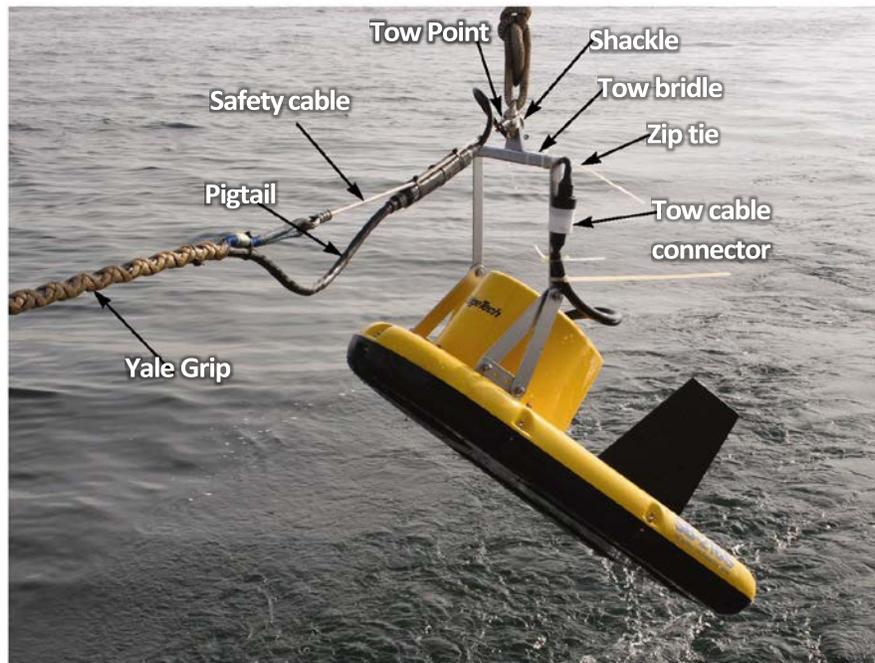


Figure 3-2: Reinforced Cable Attached to SB-216S Tow Vehicle

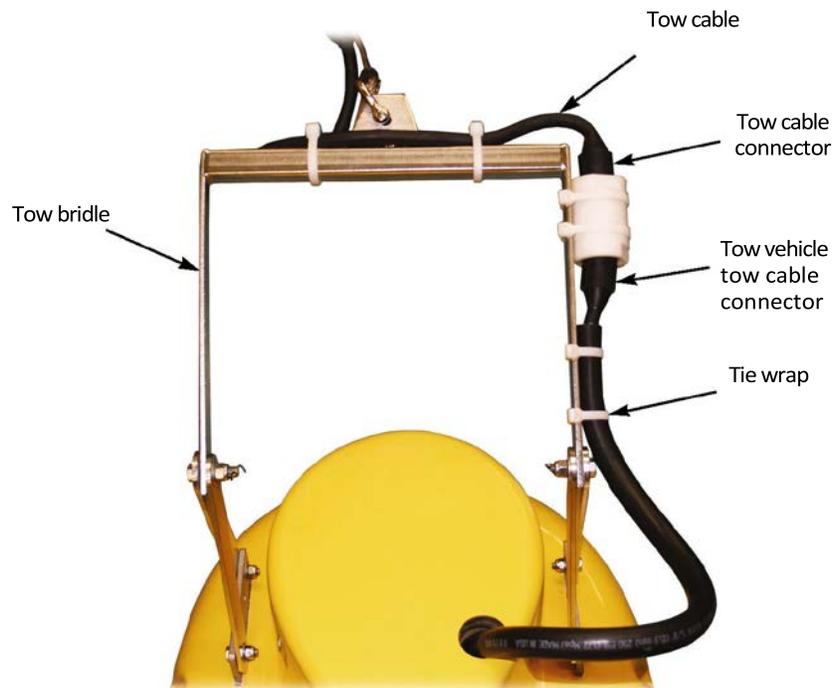


Figure 3-3: Recommended Method for Dressing and Strain Relieving Tow Cable

## 3.7.2 3100-P Portable Topside Connection and Activation

The following procedure describes how to connect the 3100-P Portable Topside configured system.

### 3.7.2.1 Connecting

1. Check that the unit power is turned OFF (switch position = DOWN).
2. Connect the 3100-P Topside to a source of AC and/or DC power using either the DC Power & Ethernet cable or the AC power cable. (Check system power specifications).

**WARNING!**

Do not extend the DC power leads of the DC Power and Ethernet Cable.

3. Connect the 3100-P Topside via the Tow cable connection to the Tow Vehicle using the supplied tow cable.
4. Connect the Notebook Computer to the 3100-P Topside using either the Wireless connection, or via the 100BaseT direct Ethernet cable (which is part of the DC Power & Ethernet cable assembly).

The Ethernet cable may be extended up to 100 feet using a Category 5 Ethernet patch cable and Ethernet connector. A crossover or direct cable may be used. (See the following section for more details).

### 3.7.2.2 Making an Ethernet Connection

The 3100-P Topside processor is assigned a static (fixed) IP Address of 192.9.0.31 at Port 1620.

EdgeTech assigns static (fixed) TCP/IP addresses for all Ethernet devices in a 3100-P Topside, and reserves all TCP/IP addresses in ranges 192.9.0.0 to 192.9.0.63 and 192.9.0.101 to 192.9.0.255 for this purpose.

EdgeTech advises that any Notebook (or Desktop) Computer intended to connect to the 3100-P Topside must therefore use a TCP/IP address 192.9.0.xxx where xxx is in the range 64 to 100. EdgeTech Factory defaults for EdgeTech Notebook (or Desktop) computers are 192.9.0.100 for Wireless Networking and 192.9.0.99 for the Ethernet LAN.

**NOTE:** The Notebook (or Desktop) computer may have only one Ethernet connection enabled or connected to the 3100-P Topside at any one time: either the Ethernet LAN connection, or else the Wireless Networking connection, but not both simultaneously.

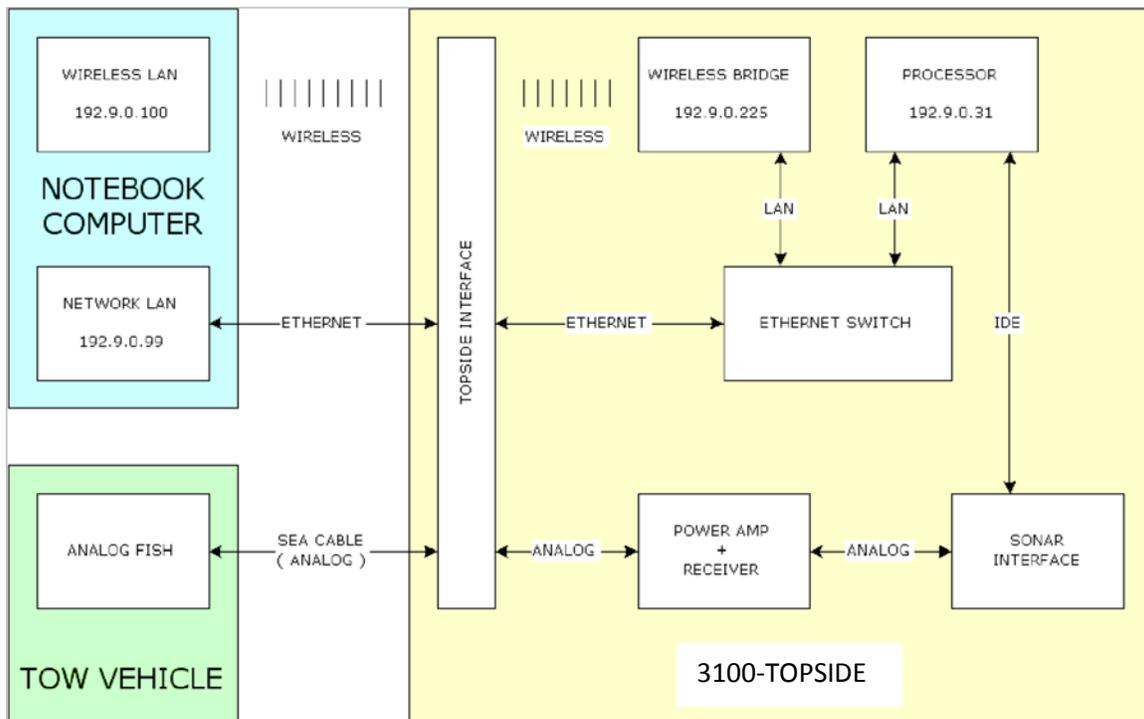


Figure 3-4: 3100-P Network Configuration Diagram

#### ETHERNET LAN CONNECTION:

The Ethernet LAN connection is made using a physical wired connection via the DC Power & Ethernet cable. This cable provides a standard RJ-45 Ethernet plug for direct connection to the RJ-45 LAN jack a Notebook (or Desktop) computer. The 3100-P Topside auto-senses straight and crossover Ethernet cables. The following steps should be taken on the Notebook (or Desktop) computer to use the Ethernet LAN connection:

1. Disable Wireless Networking: Locate Wireless Networking on Windows Desktop or the System Tray, then click it and Disable it, OR, if there is a switch, turn OFF the Wireless Networking functionality on the Notebook Computer.
2. Insert the RJ-45 plug of the supplied DC Power & Ethernet cable into the RJ-45 LAN jack of the Notebook (or Desktop) computer.
3. Enable the Ethernet LAN: Locate the Ethernet LAN on Windows Desktop or the System Tray, then click and Enable it.

If the Ethernet LAN does not indicate "Connected" status in the Local Area Network Properties Box, check all hardware connections, LAN IP address (see Section 7), and make sure that Wireless Networking is Disabled, that the Ethernet LAN is Enabled, and that the 3100-P Topside is powered on.

**NOTE:** DISCOVER software will indicate that it is in restricted mode until a valid connection is made between the Laptop and the 3100-P topside.

### WIRELESS NETWORK CONNECTION:

The Wireless Networking connection is made using the wireless networking capability of the Notebook Computer. The following steps should be taken on the Notebook Computer to use the Wireless Networking connection:

1. Disable the Ethernet LAN: Locate the Ethernet LAN on Windows Desktop or the System Tray, then click and Disable it, OR simply unplug the Ethernet cable from the Notebook Computer's RJ-45 jack.
2. Enable Wireless Networking: Locate Wireless Networking on Windows Desktop or the System Tray, then click and Enable it, AND if there is a switch, turn ON the Wireless Networking functionality on the Notebook Computer.

The IP Address for Wireless Networking is fixed at 192.9.0.100, and should not be changed. Ethernet LAN. The IP Address for Ethernet LAN is fixed at 192.9.0.99, and should not be changed. The Ethernet LAN can be configured for Auto or 100Mbit/s link speed for short (8m/25ft) cables. For longer cables EdgeTech recommends a setting of 10Mbit/s, Half Duplex mode.

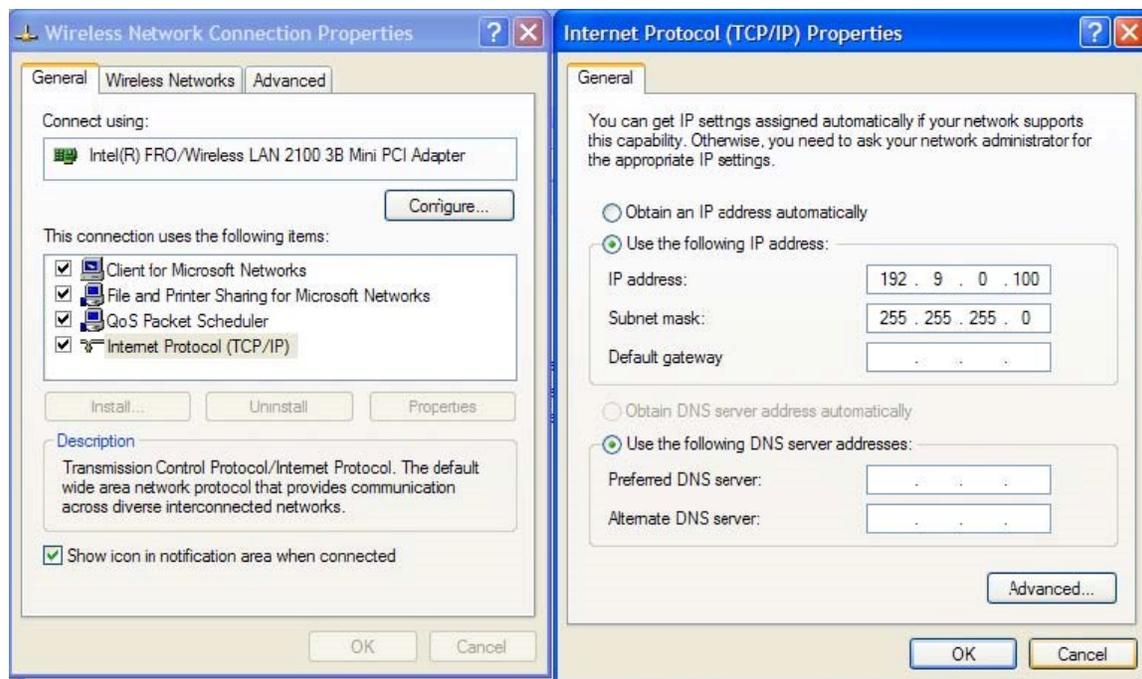


Figure 3-5: Wireless TCP/IP Address

### 3.7.2.3 Activating The System

To activate the 3100-P Portable Sub-Bottom Profiling System after making all necessary connections:

1. Operate the ON/OFF switch to the ON position (switch position = UP).



Figure 3-6: Portable Processor Case Interface

**NOTE:** The ON/OFF switch operates in both the AC and DC power input modes.

2. Observe the side panel LEDs. The desired LED status for normal operation should be:

Power RED = ON

System Ready GREEN = ON

Ping (transmit) YELLOW = OFF or FLASHING

3. The LEDs on the topside processor should display the following under normal circumstances:

#### RED LED = Power

The RED Power LED should always light up when power (AC or DC) is applied to the 3100-P Topside and the side panel power switch is in the ON position.

If the RED Power LED does not light up when power is applied, check the position of the side panel ON/OFF switch and all power connections to the unit. If the RED Power LED does not light up when power is applied, but the YELLOW LED still lights up to indicate system initialization, the most likely cause is that the RED Power LED or its own circuitry is faulty, in which case the rest of the system might still be fully operational.

**NOTE:** Listen for cooling fan activity inside the unit to determine if the unit is fully powered.

### GREEN LED = System Ready

The GREEN System Ready LED lights up solidly, and remains on, when the system is ready to run. On startup, the GREEN System Ready LED is off while the system performs power-on self-tests. If any of these self-tests fail, the GREEN System Ready LED remains off. If all self-tests pass, the GREEN System Ready LED lights up and remains on. Since these power-on self-tests also test the Tow Vehicle interface, the Tow Vehicle must be attached to the 3100-P Portable Topside for these power-on self-tests to pass.

If the GREEN System Ready LED never lights up, but stays OFF permanently, check the Tow Vehicle cabling. If a problem is found and corrected, then cycle power to run the power-on self-tests again.

### YELLOW LED = Ping

The YELLOW Ping LED lights up during startup to indicate that the system is initializing. After the system has initialized the yellow light turns off. The YELLOW Ping LED flashes while the 3100-P Topside is pinging (sonar transmitting). The flashing rate of the YELLOW Ping LED does not always match the actual ping rate (this is normal behavior).

If the YELLOW Ping LED never lights up during startup or pinging, but stays dark permanently, the most likely cause is that the YELLOW Ping LED or its own circuitry is faulty, in which case the rest of the system might still be fully operational.

## 3.8 Pre-Deployment Tests

Pre-deployment checks should be performed **before** the tow vehicle is deployed and **after** the system is activated. Pre-Deployment checks involve:

1. Listening for the transmitted pulses from the transducers on the tow vehicle
2. Tapping the fiberglass shell with a hand or, gently, with a screwdriver handle near the hydrophone arrays while observing the Waterfall Display in DISCOVER, ensuring it plays back and navigation is present. DISCOVER is shown in [FIGURE 3-7](#). An example Tap Test is shown in [FIGURE 3-11](#).

**NOTE:** See EdgeTech DISCOVER Sub-Bottom software manual, 0019800, for additional software information.

Based on default installation, DISCOVER and SONAR.EXE start automatically.

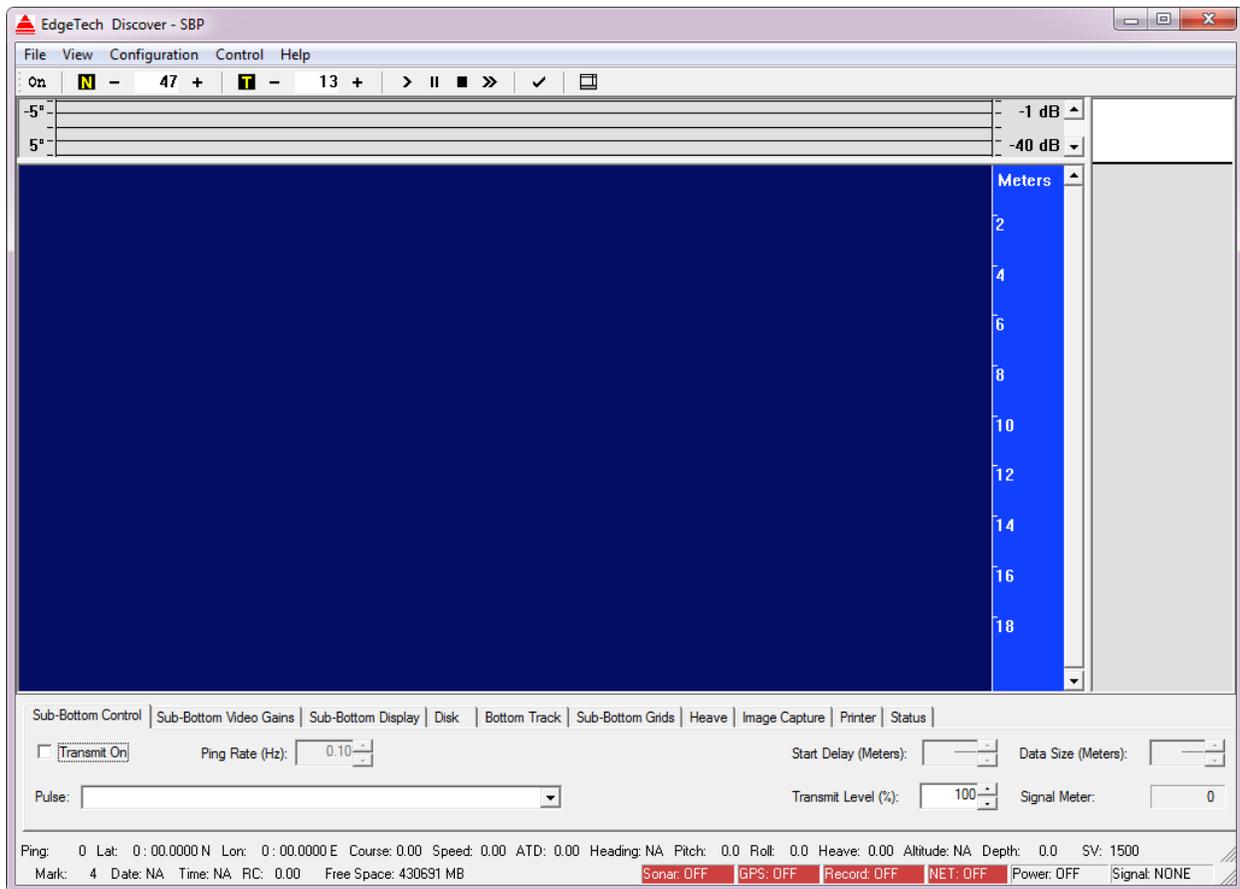


Figure 3-7: The DISCOVER Sub-Bottom Main Window

To perform the pre-deployment checks:

1. Follow the instructions in **ACTIVATING THE SYSTEM**.
2. SONAR.EXE runs a self-test, with an audible chirp, indicating the test passed. A successful test is shown in **FIGURE 3-8**.
  - a. If the test fails, the SONAR.EXE window will remain on the desktop, and the failure mode will be described in the window.

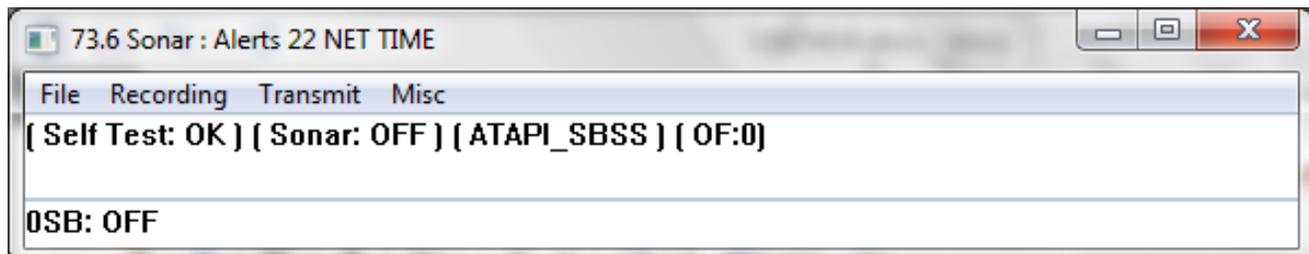


Figure 3-8: Successful Self-Test

- The NET status in DISCOVER should change from NET OFF to NET ON, as shown in [FIGURE 3-9](#).

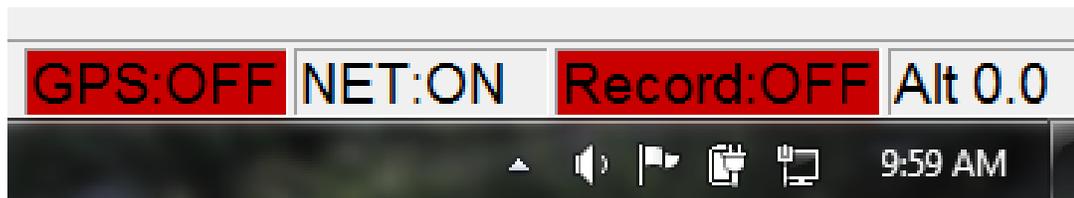


Figure 3-9: NET: ON

- Next, you should run a Tap Test. To do this, navigation to the Sub-Bottom Control Tab, shown in [FIGURE 3-10](#).



Figure 3-10: The Sub-Bottom Control Tab

- In the Shortcut Toolbar, set Gain to either 0 or -3 dB, and then click Normalize Gain Button.

**CAUTION!**

Do not allow the transducers on the tow vehicle to continuously transmit in air for an extended period, as damage to the transducers could occur.

- In the Sub-Bottom Control Tab, select a Transmit Pulse using the “Pulse” drop down. Set “Transmit Level (%)” to “0”. Select the “Transmit On” checkbox.
- The transducers on the tow vehicle should begin transmitting (at zero power) and receive data should begin scrolling on the display in the DISCOVER Main window from right to left.
- Tap the underside of the tow vehicle near the hydrophones with the handle of a screw driver, while observing the Waterfall Display in the DISCOVER window. Streaks or noise spikes should be visible in the Waterfall Display, as shown in [FIGURE 3-11](#). This verifies the receive channel is operating.

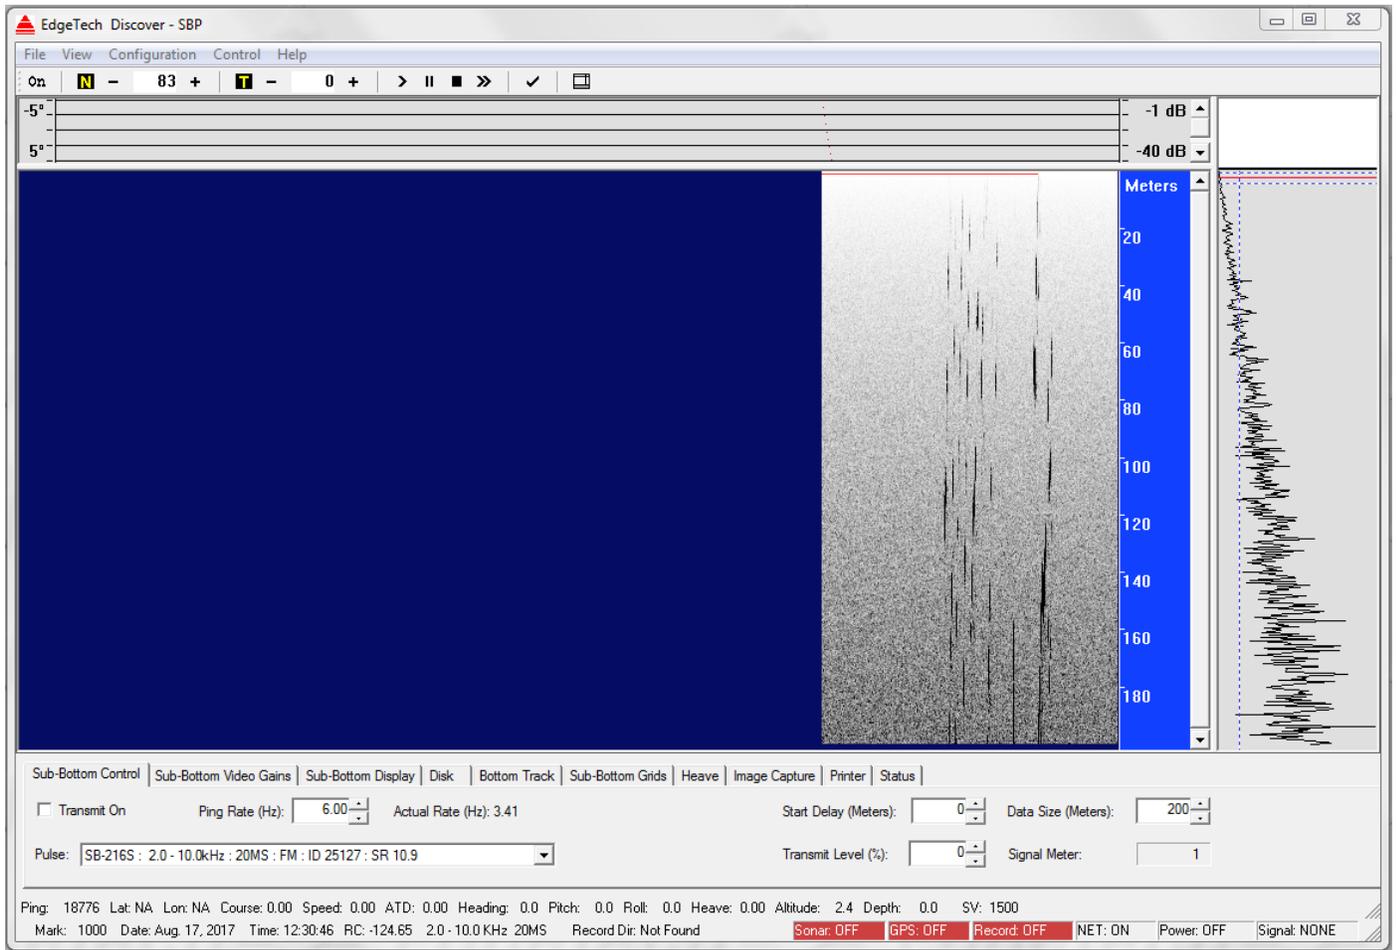


Figure 3-11: Tap Test

## 3.9 Tow Vehicle Deployment

The SB-424 and SB-216S Tow Vehicles can be towed using the 35-Meter Kevlar Reinforced Tow Cable. A steel cable can also be to increase the life of the tow cable. For towing in deep water, a single, armored tow cable is required. The steel cable can be secured to the tow cable using electrical tape, making sure there is enough built-in slack in the tow cable so that the entire load is supported by the steel cable.

### CAUTION!

Do not tow the tow vehicle too close to the survey vessel. Towing in this manner can cause the tow vehicle to be pulled in against the hull of the ship due to the low pressure of the propeller wash and the effect of the water flowing by the hull. In addition, sonar reflections from the hull may be evident in the records.

The tow vehicle may be towed at speeds of up to 10 knots. However, to optimize performance and minimize flow noise, it is recommended that the tow vehicle be towed at speeds of less than 5 knots. Lead ballast in the nose of the tow vehicle provides towing stability by allowing the tow point to be placed as far forward as possible and by making the tow point well above the center of gravity of the tow vehicle. The tow point is factory adjusted so that the tow vehicle is level when it is towed in the water at 3 to 5 knots.

### CAUTION!

Do not tow the tow vehicle with the nose angled up or down. Doing so can degrade the sonar imagery. Before towing the tow vehicle, verify that it is as level as possible when towing the tow vehicle at 3 to 5 knots.

### 3.9.1 Obtaining the Best Sonar Imagery When Towing

To generate good sonar imagery, the pitch of the vehicle, which is how much in degrees the nose is angled up or down, must be less than one half of the -6 dB beam width of the acoustic pulse at its highest frequency—and less at lower frequencies. As a rule of thumb, for a 0.5-meter long hydrophone array, the -6 dB beam width at 10 kHz is 20 degrees. For

example, if you are transmitting a 2 to 15 kHz FM pulse using a tow vehicle with a 0.5-meter long receiving array, such as in the SB-216S or SB-216D Tow Vehicle, you must keep the tow vehicle from pitching more than about 7 degrees in either direction, or

$$\frac{\frac{1}{2} \times 20 \text{ degrees} \times 10 \text{ kHz}}{15 \text{ kHz}} = 6.6 \text{ degrees}$$

*Equation 1*

The same criteria apply to vehicle roll, which is how much in degrees it is listing to port or starboard. Sensors can be installed on the tow vehicle to measure its pitch and roll under various towing conditions.

### 3.9.2 Conducting Sediment Classification Surveys When Towing

To conduct sediment classification surveys, the reflection coefficient should be measured with better than 10% accuracy. The normal component of the sea floor reflection must arrive within the angle corresponding to one half of the -1 dB beam width of the acoustic axis of the vehicle at the center frequency of the pulse, the frequency where most of the acoustic energy is concentrated and where the reflection coefficient is measured. As a rule of thumb, for a 0.5-meter long hydrophone array, the -1 dB beam width at 10 kHz is 4 degrees.

For example, if the sea floor is expected to have slopes of up to 5 degrees during the survey, and a vehicle with a 0.5-meter hydrophone array and a 2 to 10 kHz FM pulse is selected, the -1 dB beam width should be at least 10 degrees at 6 kHz. For this pulse and receiving array, the -1 dB beam width at 6 kHz is about 7 degrees, or

$$\frac{4 \text{ degrees} \times 10 \text{ kHz}}{6 \text{ kHz}} = 6.6 \text{ degrees}$$

*Equation 2*

Therefore, only reflection coefficient measurements made when the sea floor slope is within 3.5 degrees of horizontal will be accurate within 10% (1 dB).

The attitude of the tow vehicle with respect to the horizontal plane must meet the -1 dB criteria described above for sediment classification surveys. Rough sea conditions tend to move the vehicle up and down vertically, causing oscillations in the images. DISCOVER 3100-P SB has a swell filter that will help reduce the heave effect on the record. Refer to the “DISCOVER 3100-P SB Sub-Bottom Software User’s Manual” for details. For sediment classification, the tow fish pulses must be calibrated by the end user. This calibration procedure is described in the software manual.

## SECTION 4: MAINTENANCE

The 3100-P Sub-Bottom Profiling System is ruggedly designed and built, therefore requiring little maintenance. To ensure long lasting and reliable service, however, some periodic maintenance is recommended. This section provides some maintenance recommendations and includes instructions on how to disassemble and reassemble a tow vehicle should it be required to replace internal components.

### 4.1 Portable Topside

The 3100-P Portable Topside requires no maintenance.

### 4.2 Cleaning the Tow Vehicle and Tow Cable after Use

After retrieving the tow vehicle from the water, use a hose to wash it down, along with the tow cable, with clean, fresh water. Thoroughly spray the transducers and the hydrophone arrays from underneath the tow vehicle and remove any buildup of debris that may have been trapped inside. Inspect the inside of the tow vehicle, especially the transducers, the hydrophone arrays and the cables for any damage and for any loose connectors. Also inspect the tow cable and the connectors on each end.

After washing down the tow vehicle, clean the transducers and hydrophone arrays using a mild, non-abrasive detergent and water. Do not use any abrasive detergents or ammonia based cleaners. After cleaning, thoroughly spray the transducers and hydrophones again with fresh water.

### 4.3 Inspecting and Cleaning the Underwater Connectors

Regularly inspect the contacts on the male pins of each underwater connector in the tow vehicle and on the tow cable for corrosion or oxidation. To remove any oxidation, rub the contacts lightly with 800 grit emery cloth cut into strips equal to or less than the width of a contact. A pencil eraser can also be used for this purpose. The female sockets can be cleaned using a cotton swab and rubbing alcohol. A .22 caliber bore brush with only nylon bristles can be used to remove light oxidation.

To extend the life and increase the reliability of the connectors, apply a thin film of silicone dielectric grease, such as Novagard G624 general purpose silicone grease or an equivalent, to the entire surface of each male pin. A small amount of grease should also be applied to the opening of each female socket.

**NOTE:** Remember to always install dummy connectors on the connectors of the tow cable and the tow vehicle tow cable connector.

## 4.4 Storage

When not in use, all the components of the 3100-P Sub-Bottom Profiling System should be packed in their original shipping containers, in the same manner in which they were originally shipped, and stored in a dry area.

## 4.5 Restoring the Operating System

An image file of the 80-GB hard drive is provided on a flash drive. This flash drive can be used to completely restore the hard drive to its original shipped factory configuration in the unlikely event of its failure. For instructions on how to restore the operating system hard drive, refer to [APPENDIX A: SYSTEM RESTORE](#).

## 4.6 Disassembling and Reassembling a Tow Vehicle

The procedures below describe how to disassemble and reassemble a tow vehicle to access the transducers, hydrophones, transformers, inductors, spider boxes, spider arrays, and preamplifiers. The tools required are a socket wrench, 7/16 and 1/2-inch sockets, and a small flat screw driver.

**CAUTION!**

Disassembling a tow vehicle may void its warranty. If in doubt, contact [EDGE TECH CUSTOMER SERVICE](#) for more information.

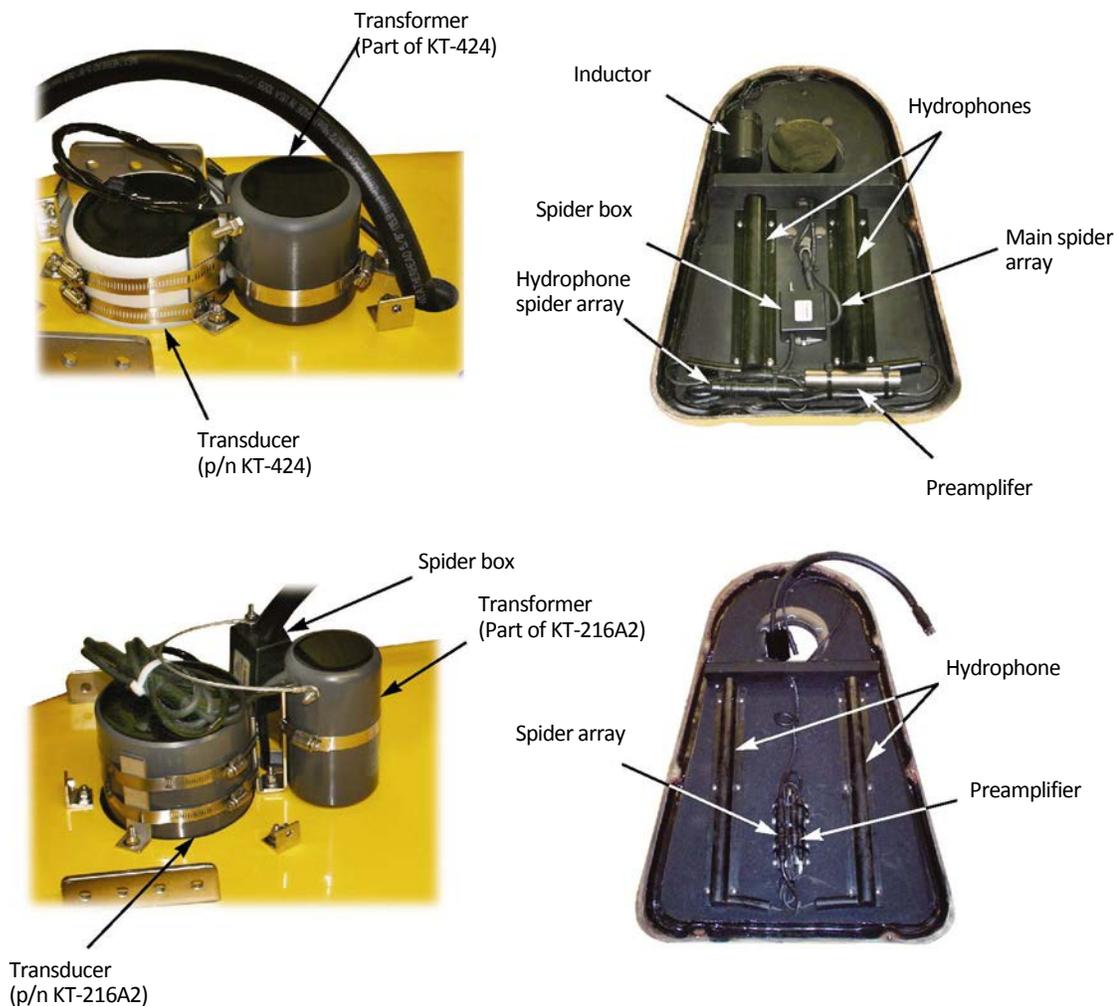


Figure 4-1: SB-424 and SB-216S Tow Vehicle Internals

### 4.6.1 Disassembling a Tow Vehicle

**NOTE:** Some of the images shown below are of a 216SB vehicle being disassembled, whilst not the exactly like the 424 vehicle the overall disassembly procedure is similar.


To disassemble a sub-bottom tow vehicle:

1. Using the blade of the screw driver, pry out the retaining ring from the locking sleeve as shown in **FIGURE 4-2**.




*Figure 4-2: Retaining Ring and Locking Sleeve Removed*

2. Remove the retaining ring and the locking sleeve from the connector as shown in **FIGURE 4-3**.

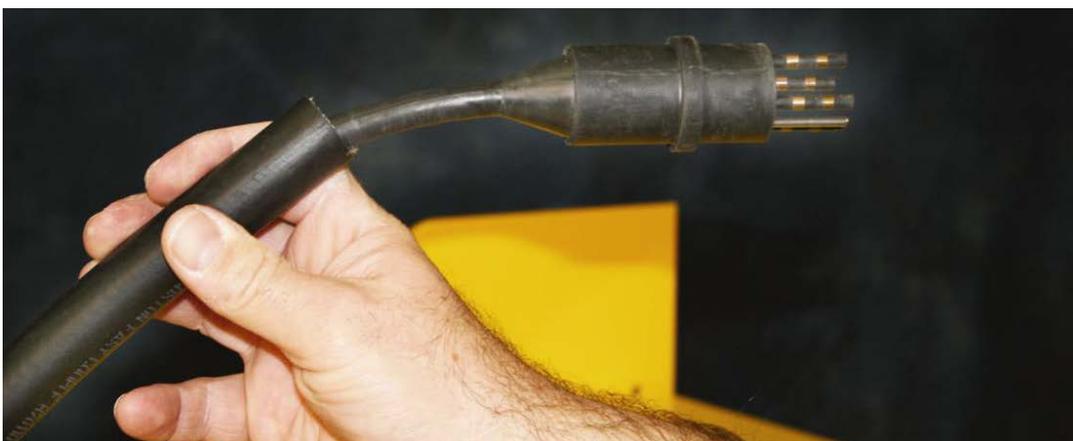

*Figure 4-3: Male Connector*

- Using the socket wrench with the 7/16-inch socket, remove all the bolts securing the teardrop cover to the body of the tow vehicle as shown in **FIGURE 4-4**.

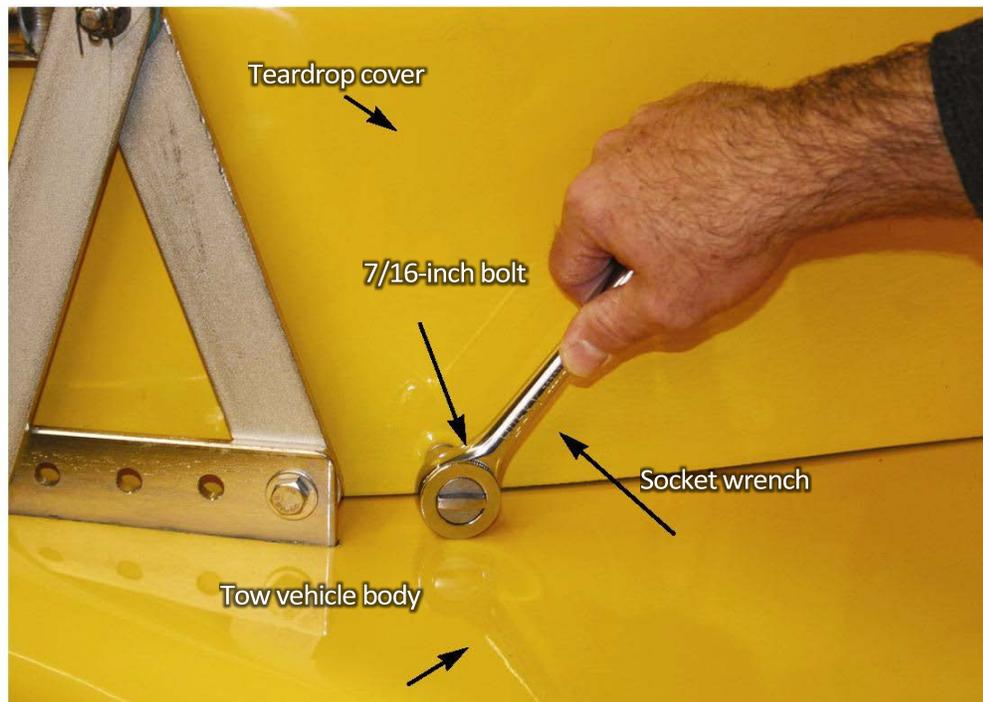

*Figure 4-4: Removing the 7/16-Inch Bolts Securing the Teardrop Cover to the Tow Vehicle*

- Remove the teardrop cover as shown in **FIGURE 4-5**.




*Figure 4-5: Removing the Teardrop Cover*

5. Push the main spider assembly pigtail through the hole in the teardrop cover in **FIGURE 4-6**.



*Figure 4-6: Teardrop Cover Removed*

6. Using the socket wrench with the 7/16th-inch socket, remove all of the bolts and nuts securing the front half of the top cover of the tow vehicle body as shown in **FIGURE 4-7**. Continue with the rear half using a 1/2 -inch socket.

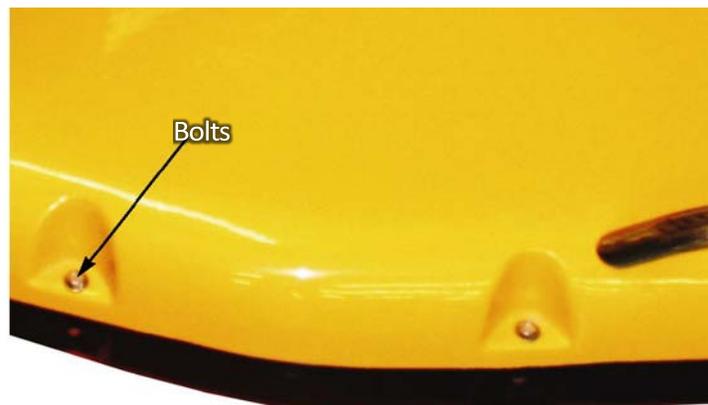

*Figure 4-7: Removing 7/16 and 1/2 Inch Bolts and Nuts*

7. Lift the top cover off, turn it over, and disconnect the spider cable from the hydrophones and the preamp components.

## 4.6.2 Reassembling a Tow Vehicle

To reassemble the tow vehicle, reverse the disassembly procedure described above.

## SECTION 5: TROUBLESHOOTING

Should some operational or performance problems occur with the 3100-P Sub-Bottom Profiling System, it may be possible to correct them using the troubleshooting guide provided below.

This troubleshooting guide identifies some symptoms that could occur and presents one or more possible causes and the recommended corrective action for each. When using the troubleshooting guide, perform the corrective action for any given symptom in the order of possible causes, which generally corresponds to the degree of troubleshooting difficulty, from the simple to the more complex.

Before proceeding with any corrective action, verify the following:

- The topside is plugged into an appropriate power source.
- The 3100-P Portable Topside is switched on.

**NOTE:** Be sure to also verify that all the cables in the topside and the tow vehicle are properly mated and are not loose or damaged. Most causes of operational or performance problems are a result of poor connection.

## 5.1 3100-P Portable Topside Troubleshooting

A table of troubleshooting procedures for the 3100P Topside is provided below:

SYMPTOM	PROBABLE CAUSE	CORRECTIVE ACTION
<b>RED POWER LED indicator on the topside does not turn on when the switch is turned on.</b>	LED is defective	Replace the bulb. The Power Amplifier will operate with the bulb burnt out.
	AC fuse is blown.	Check the 5A/250V fuse in the topside connector box. If blown, replace the fuse.
	DC fuse is blown	Check the 20A fuse inside the 3100P topside. To access remove Top cover. If blown, replace the fuse. Use a 20A supplied.
<b>The green Ready LED indicator on the 3100P Topside Processor does not illuminate</b>	AC power is not connected.	Check the AC power cables and verify that the Deck Unit is connected to AC power.
	The indicator is not operating.	Open the 3100P Topside Processor and check the indicator and replace LED.
<b>When performing the pre-deployment tests, transmissions from the transducers are not heard.</b>	The tow cable is disconnected.	Check the tow cable and verify that it is properly connected on both ends.
	The tow cable is damaged.	Check the tow cable connectors for excessive corrosion or a broken pin.  If corrosion or a broken pin is not found, check the continuity of the conductors in the tow cable.
		The topside spider has failed, replace spider assembly
		The transducer has failed, replace transducer
	The Power Amplifier has failed.	Replace the Power Amplifier.
	The Tiger board has failed.	1. Check the sonar.exe program to see what it is reporting for a fault if any. 2. Check connectors to board 3. If these solutions fail, Contact EdgeTech about replacing the Tiger Board
<b>When performing the pre-deployment tests, signals in the Sonar display are not present</b>	Tow vehicle cable harness connections are loose.	Verify that all the cable harness connectors in the tow vehicle are properly mated.
	12 VDC power for the preamplifier is not present.	Check the sonar.exe program for 12 VDC  If 12 VDC is not present replace the Tiger board.

SYMPTOM	PROBABLE CAUSE	CORRECTIVE ACTION
	5 VDC from the preamplifier in the tow vehicle is not present.	Measure voltage between TOWFISH PREAMP 5 VDC test point and PREAMP COMMON test point on back of Deck Unit.  Voltage should be 5 VDC. If 5 VDC is not present, check tow cable and spider mold in tow vehicle, repair or replace as needed.  If 5 VDC still not present, replace tow vehicle's preamplifier.
Vertical black streaks are present in the Sonar display.	One or more of the underwater connectors are loose or have corroded contacts.	Inspect and clean the connectors. Reconnect the connectors.
	Extended use has caused a conductor in the tow cable or the cable harness in the tow vehicle to break.	Check the continuity of the conductors in the tow cable and in the cable harness.
There is white data dropout in the Sonar display.	A connector is loose or flooded.	Wiggle the tow cable connections and the connectors of the cable harness in the tow vehicle while watching the Sonar display for white streaks. If white streaks are present, refer to "Inspecting and Cleaning the Underwater Connectors" on page 4-2 and inspect and clean the connectors. Reconnect the connectors, and if necessary, secure them using electrical tape or locking sleeves. Possible spider assembly problem.
There are periodic streaks in the Sonar display from AC noise.	The system is not properly grounded.	Check the continuity between the GND connection on the back of the Deck Unit to ship's ground.
	The return signals from the hydrophone arrays are being clipped.	Reduce the preamplifier gain or the transmit power, or both.
Noise is present in the Sonar display.	Engine noise is coupling into the sonar frequency band.	Isolate the engine noise.
	Tow vehicle is in or near the ship's wake.	Tow the tow vehicle at a deeper depth and farther away from ship.
	The tow vehicle is not level when being towed.	Level the tow vehicle by adjusting the tow point such that the tow vehicle is level when moving through the water at 3 to 5 knots.
	The tow vehicle is being towed too fast.	Lower the speed of the tow vehicle.

Table 5-1: 3100-P Portable Topside Troubleshooting

## 5.2 Wiring and Connector Pin out Drawings

Included in the following pages are the 3100-P Sub-Bottom Profiling System diagrams for the 35-meter cable, portable topside, and towfish.

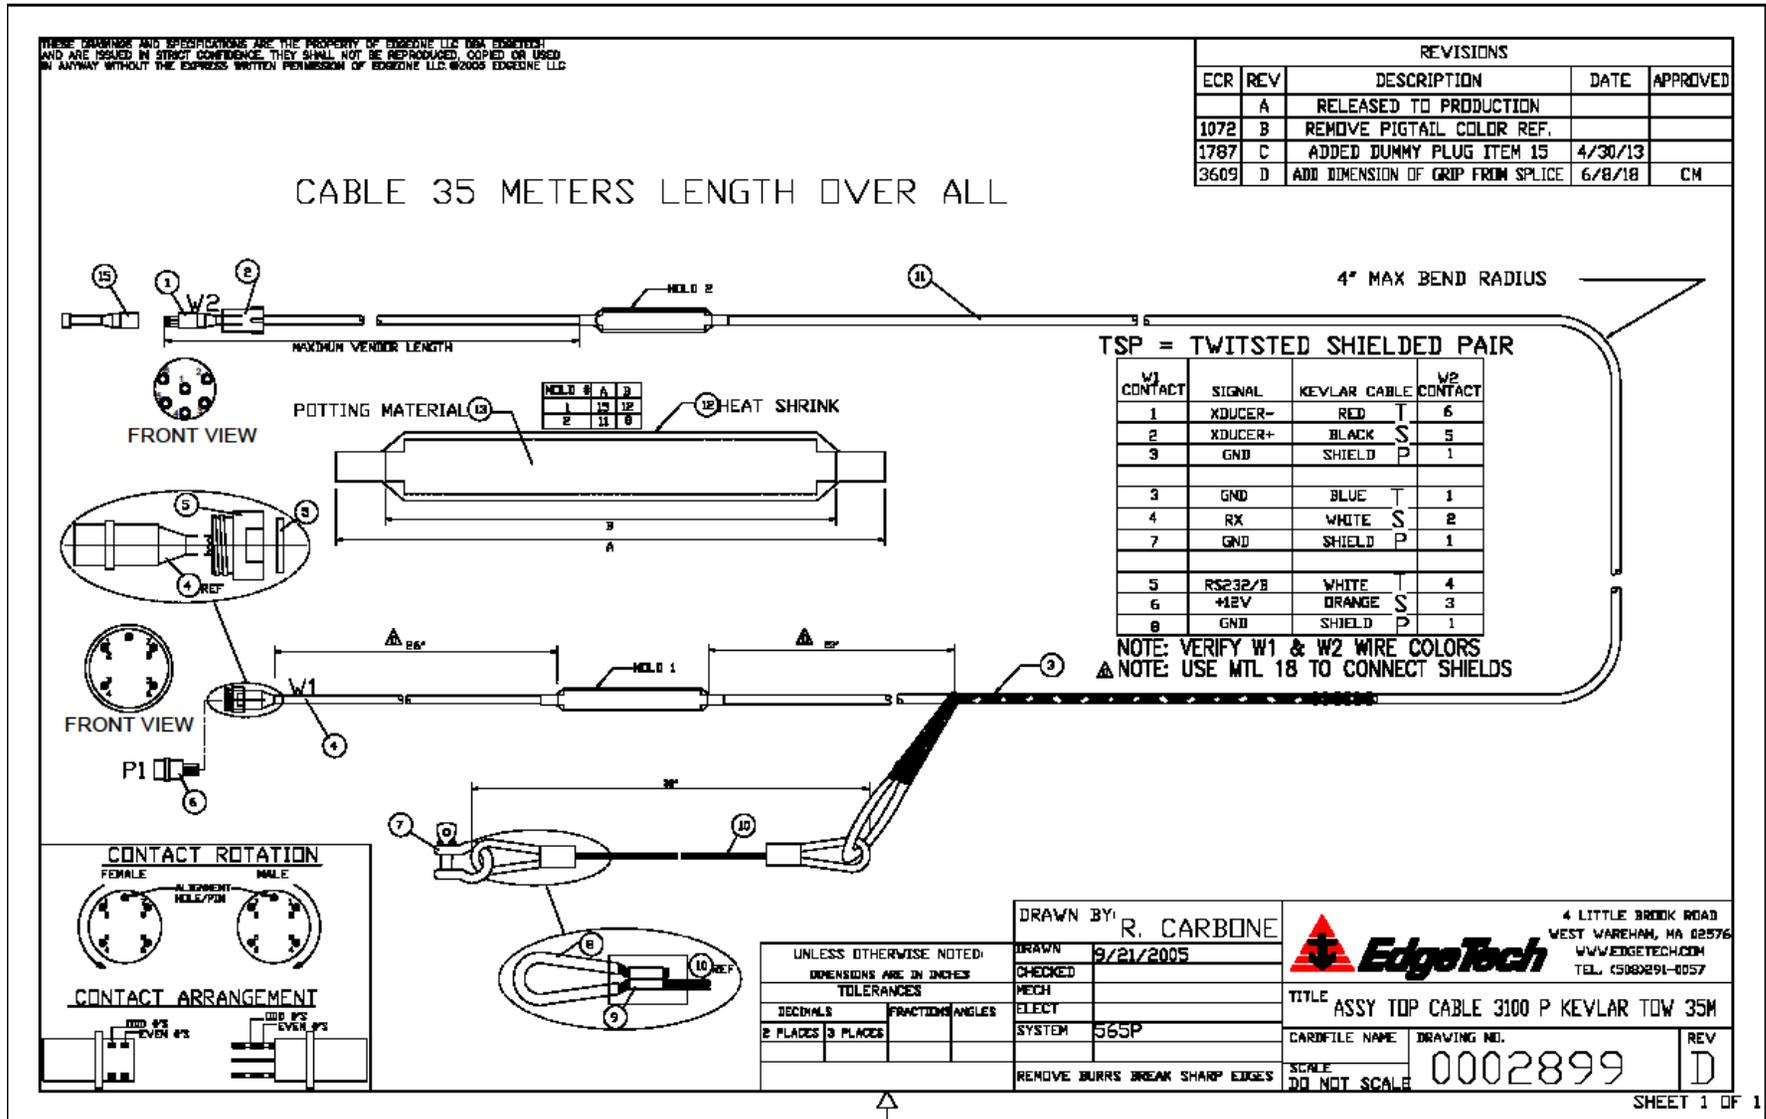


Figure 5-1: 35M Tow Cable Diagram – 0002899



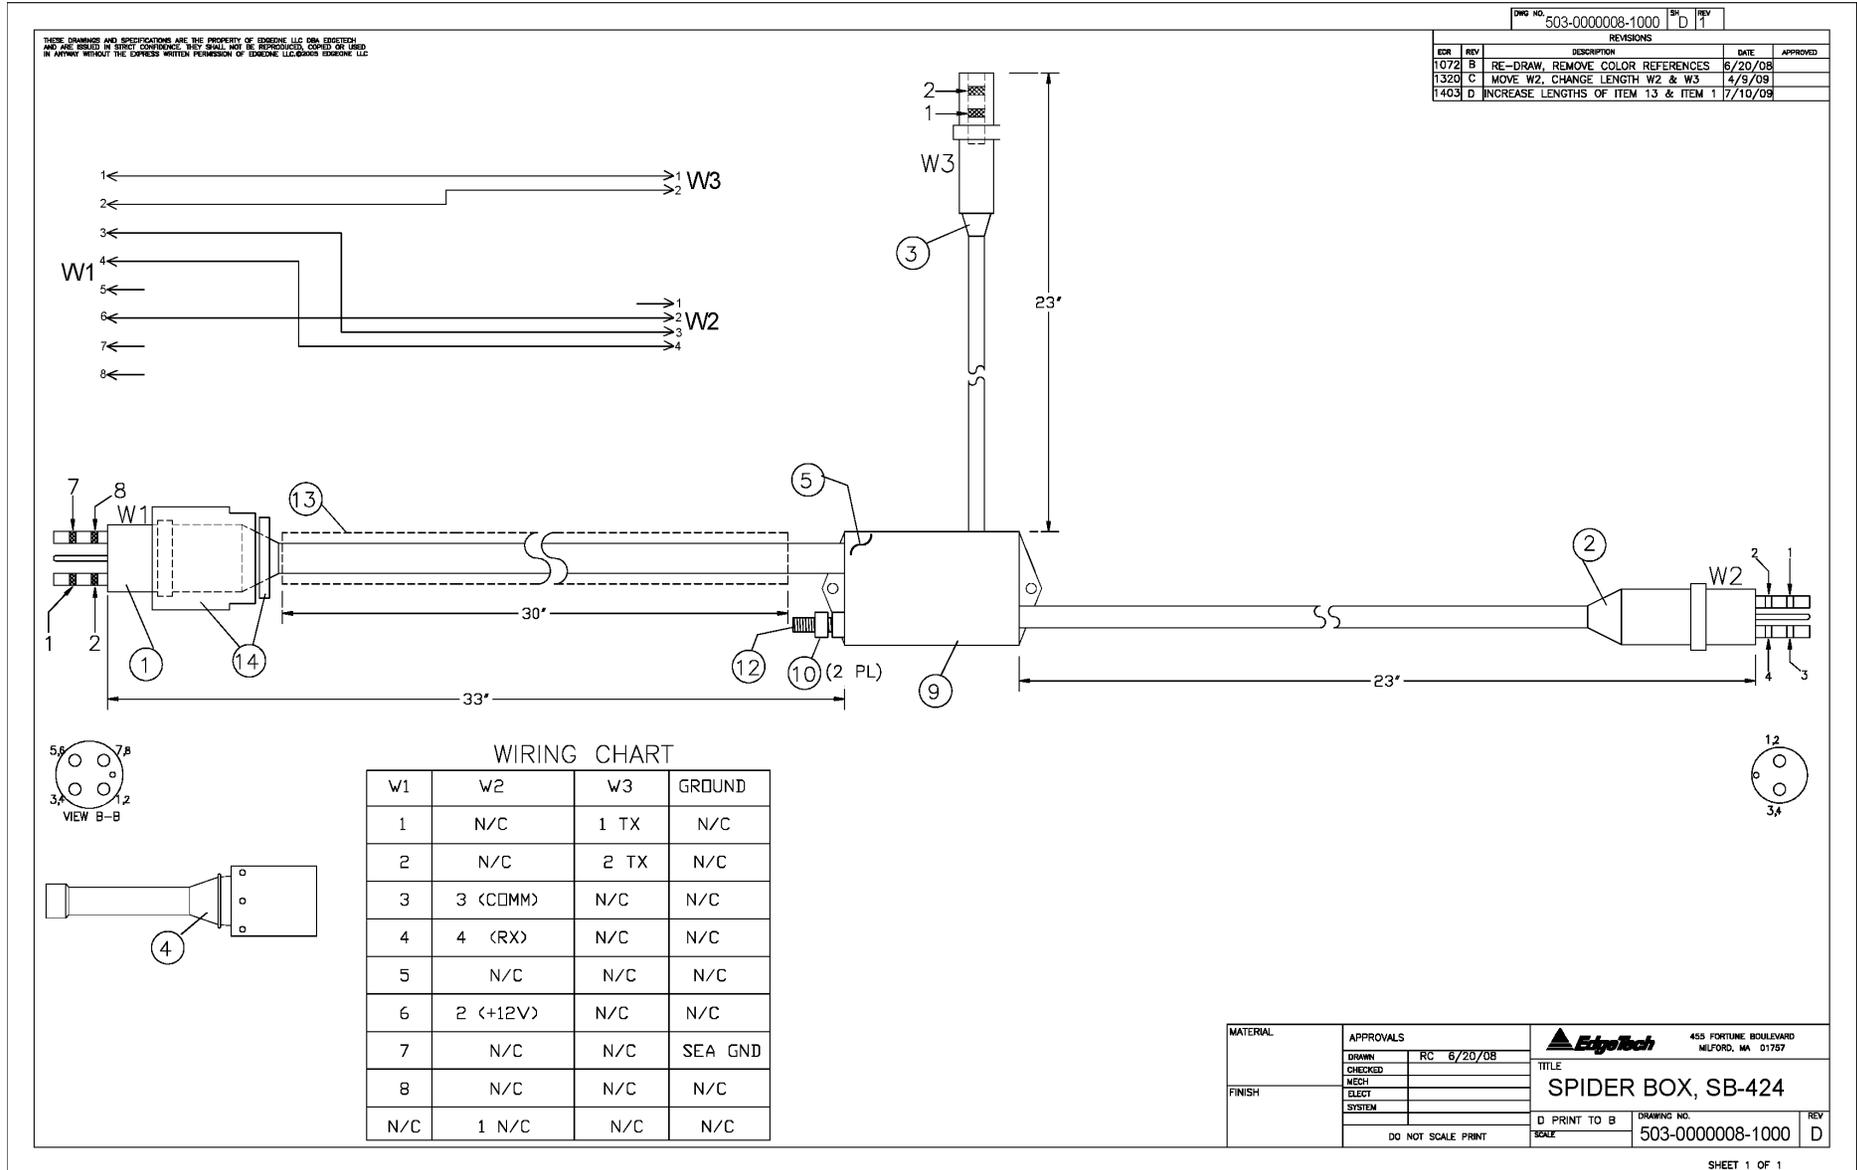


Figure 5-3: Wiring Diagram, Spider Box, SB-424 Tow Vehicle

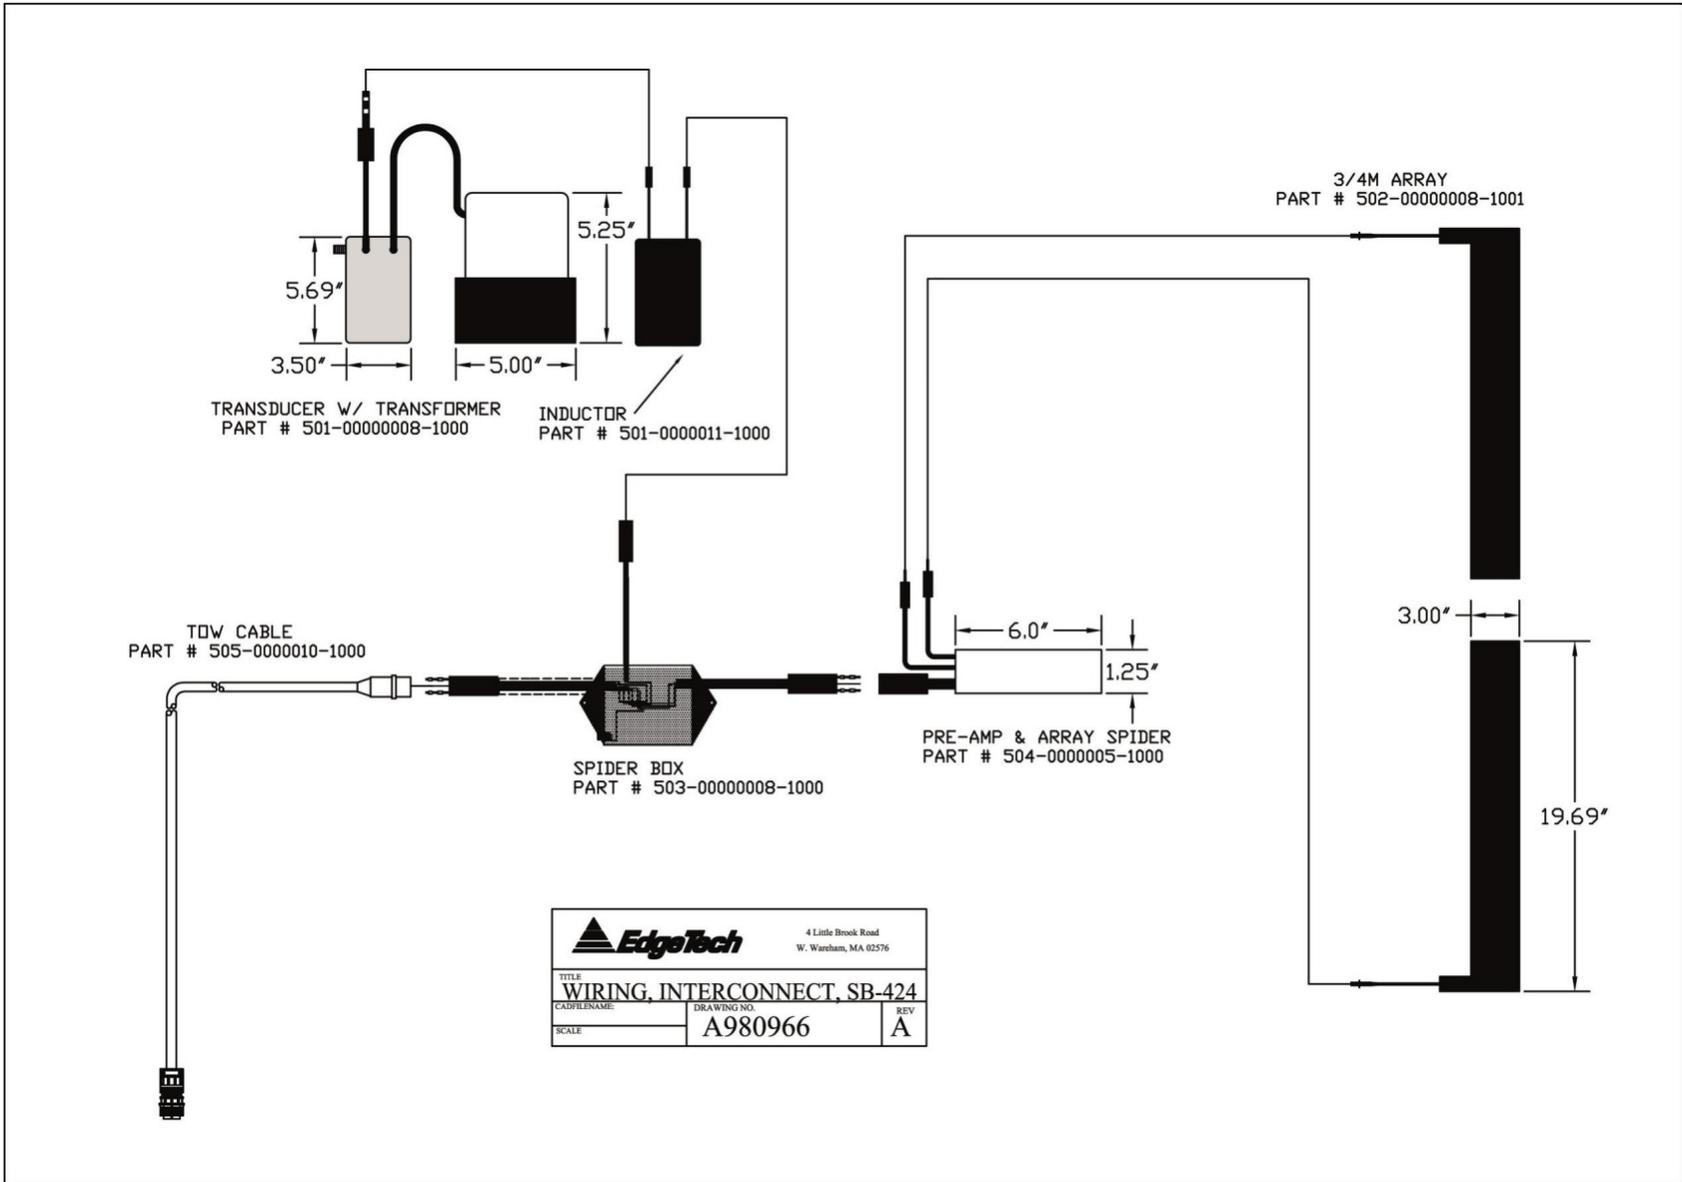


Figure 5-4: Wiring Diagram, SB-424 Tow Vehicle


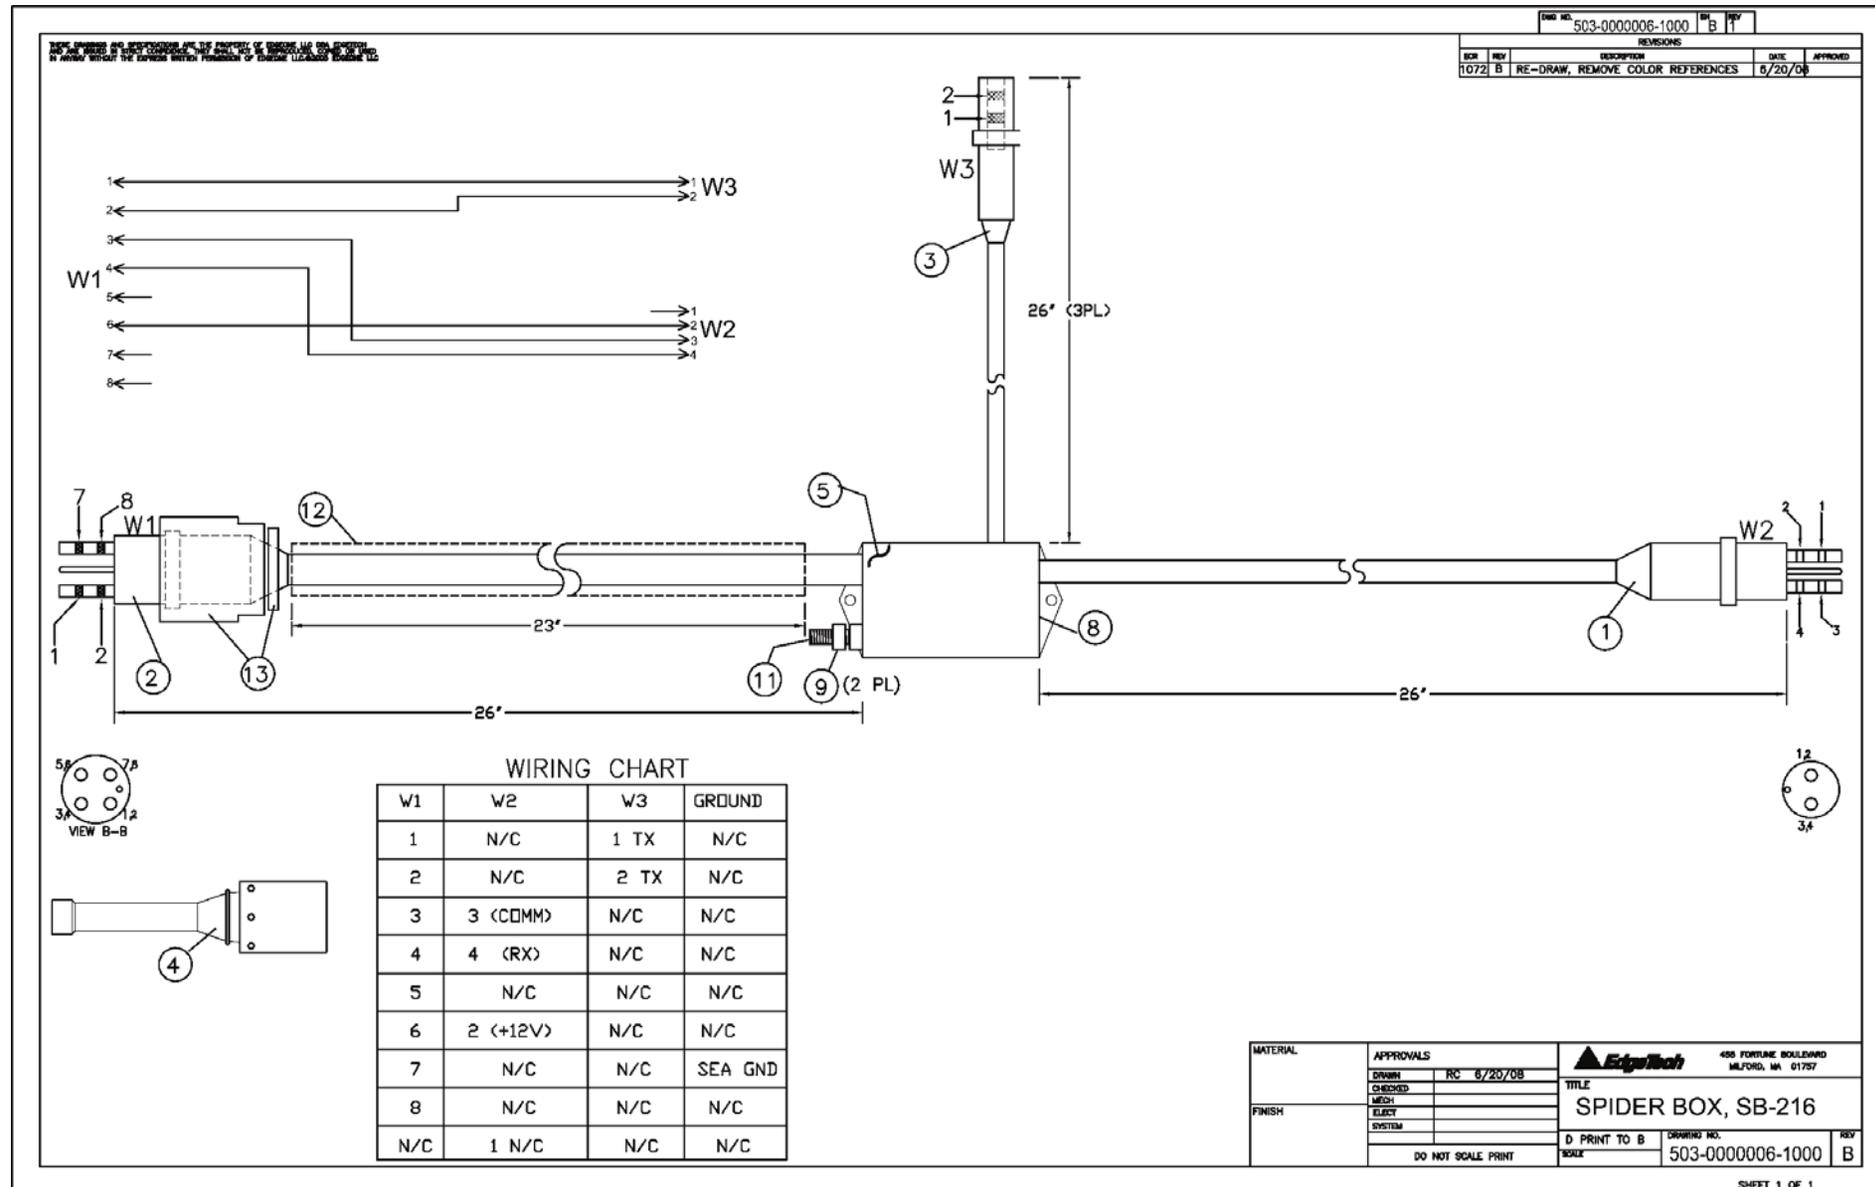


Figure 5-5: Wiring Diagram, Spider Box, SB-216S Tow Vehicle

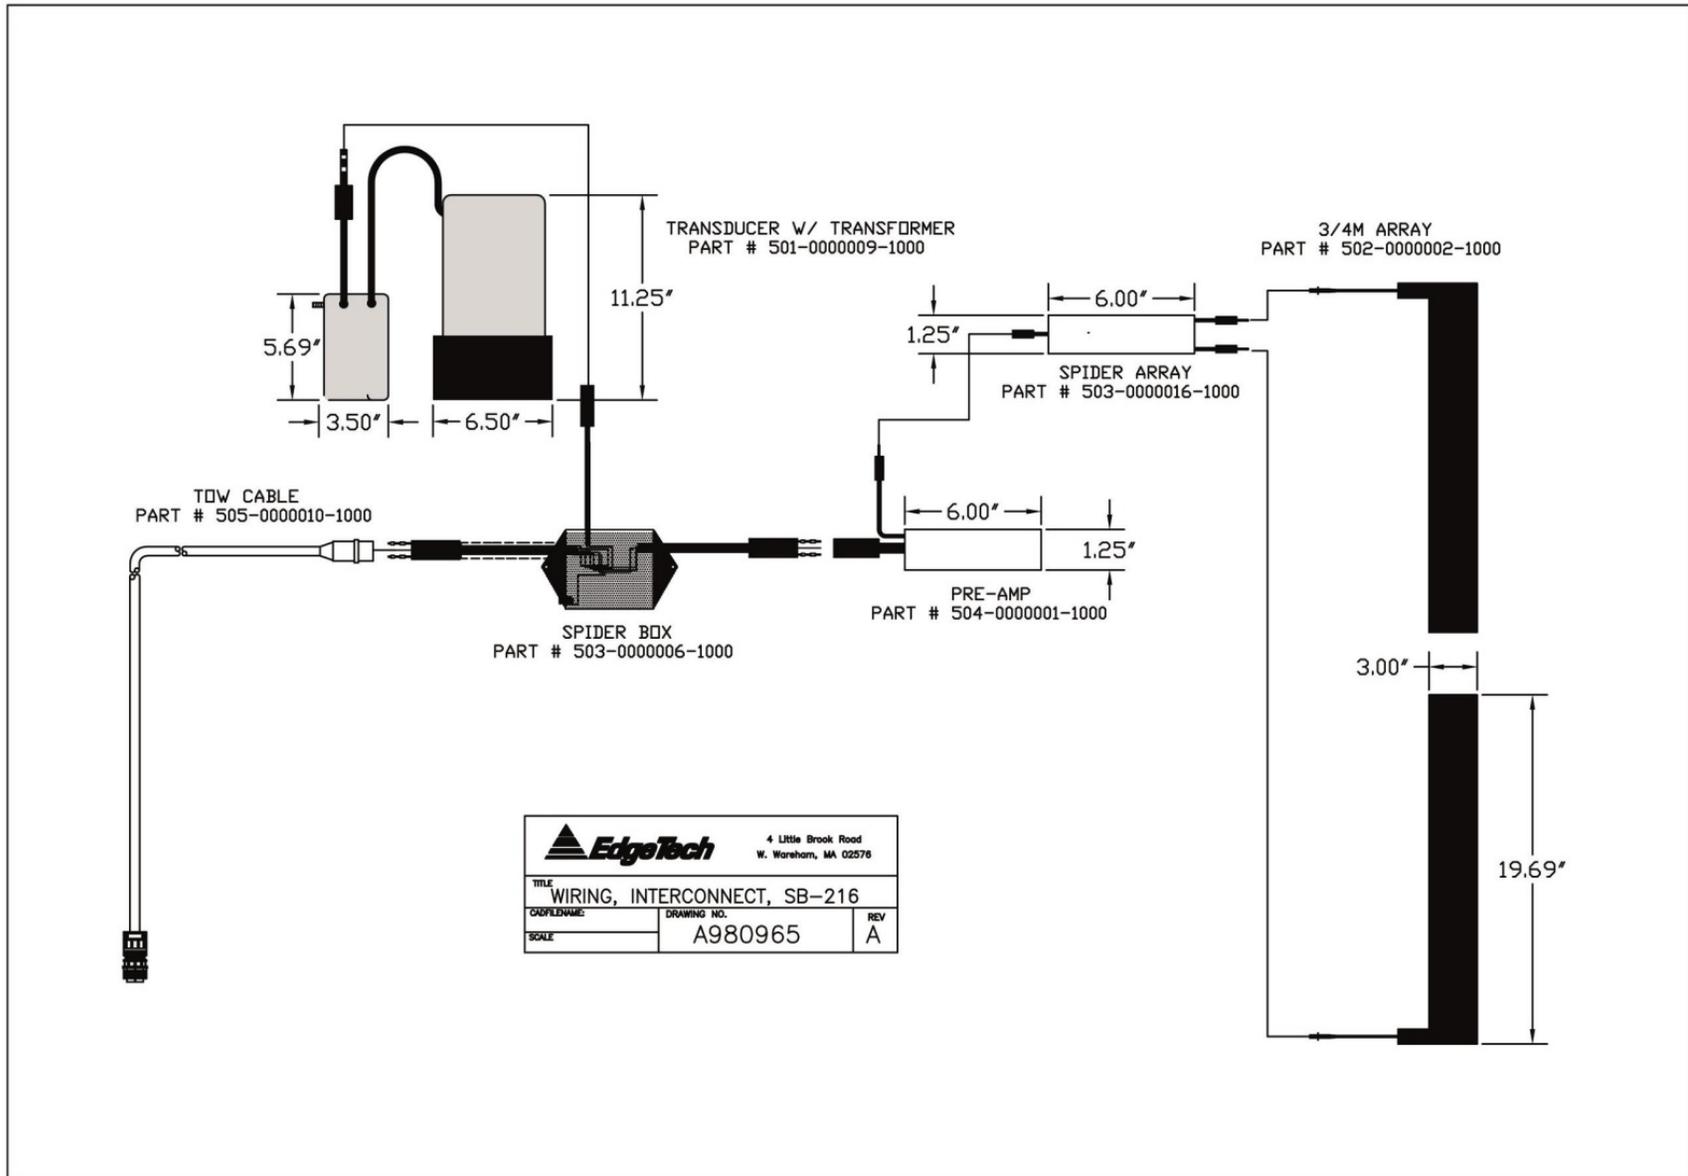

		4 Little Brook Road W. Wareham, MA 02576	
TITLE WIRING, INTERCONNECT, SB-216			
CADFILENAME:	DRAWING NO.	REV	
	A980965	A	
SCALE:			

Figure 5-6: Wiring Diagram, SB-216S Tow Vehicle

## APPENDIX A: SYSTEM RESTORE

The following section outlines the procedures for backing up and restoring the system drive.

### CAUTION!

All data will be lost upon restoring the system to factory settings. Be sure to backup all data before performing the procedure below.

1. Ensure that topside is off.
2. Insert USB3 flash drive in blue USB3 port.
3. Start topside and be prepared to press **F\*\*** key when prompted:
  - a. If the topside is rack mount, press **F11**.
  - b. If the topside is a laptop, press **F12**.
4. Under **Please select boot device:** By using up/down arrow keys, select **EFI: Corsair Voyager 3.0 000A**, then press **Enter**.
5. Wait for **Paragon Backup & Recovery 14 Home** screen to appear, then click **Restore** icon.
6. On **Welcome to the Restore Wizard** screen click **Next**.
7. On **Browse for Archive** screen, drag down menu and click on  to the left of **(E:)**. Click on folder named as a variation of **V\*.\*.\*\_\*\*\*\*R** for rack mounts, or **V\*.\*.\*\_\*\*\*\*P** for laptops. When **Archive File Details** window appears, click **Next**.
8. At **What to restore** window, click **Basic MBR Hard Disk 0**, click **Next**.
9. At **Where to restore** window, ensure that **Basic MBR Hard Disk 0** is already selected (brown box around it). If it is not, use up/down arrow keys to select. Click **Next**.
10. At **Restore results** window, make no selection and click **Next**.
11. At the **Ready to restore from the archive** window, select  **Yes, apply the changes physically**. Click **Next**. *Restoring will begin.*
12. At **Completing the restore wizard**, click **Finish**. Click **Shutdown**.
13. Remove USB3 flash drive and restart topside.